


FS SERIES

FLOOR FLEX SEAL

NOTE: METAL COVER REQUIRED
AT PEDESTRIAN TRAFFIC.

COLOR: AVAILABLE IN BLACK ONLY

THIS SYSTEM IS DESIGNED FOR
CONCRETE APPLICATIONS ONLY.
ATTACHING TO METAL SUBSTRATE
IS NOT RECOMMENDED OR
WARRANTED BY BALCO

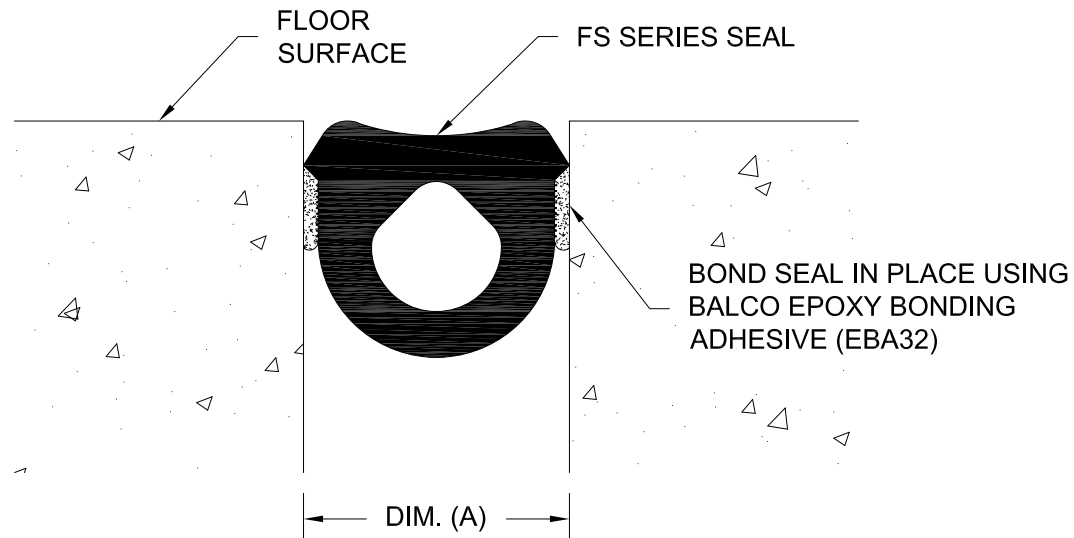

SYSTEM	INSTALL WIDTH	MINIMUM A	MAXIMUM A	MOVEMENT	SEAL SIZE
FS-100	13/16" (21mm)	7/16" (11mm)	1 1/4" (32mm)	13/16" (21mm)	1" (25mm)
FS-150	1 1/4" (32mm)	5/8" (16mm)	1 7/8" (48mm)	1 1/4" (32mm)	1 1/2" (38mm)
FS-200	1 5/8" (42mm)	7/8" (22mm)	2 1/2" (64mm)	1 5/8" (41mm)	2" (51mm)
FS-250	2" (51mm)	1 1/8" (29mm)	3 1/8" (79mm)	2" (51mm)	2 1/2" (64mm)
FS-300	2 7/16" (62mm)	1 3/8" (35mm)	3 3/4" (95mm)	2 3/8" (60mm)	3" (76mm)
FS-400	3 1/4" (83mm)	1 13/16" (46mm)	5" (127mm)	3 3/16" (81mm)	4" (102mm)

Project

Customer

SO#

Date

Length	Qty.	Color

Scale: NTS

The information contained herein is the proprietary property of **BALCO, INC.** No portion of it may be reproduced by any means or used in any form except for the purpose for which it was furnished. All rights of design and invention are hereby reserved.



2626 S. Sheridan PO Box 17249
Wichita, Kansas 67217-0249 USA
P: +1-316-945-9328 F: +1-316-945-0789