


CE-SX SERIES

SILICONE COMPRESSION/EXTENSION SEAL
AVAILABLE IN CONTINUOUS LENGTHS UP TO 100 L.F.

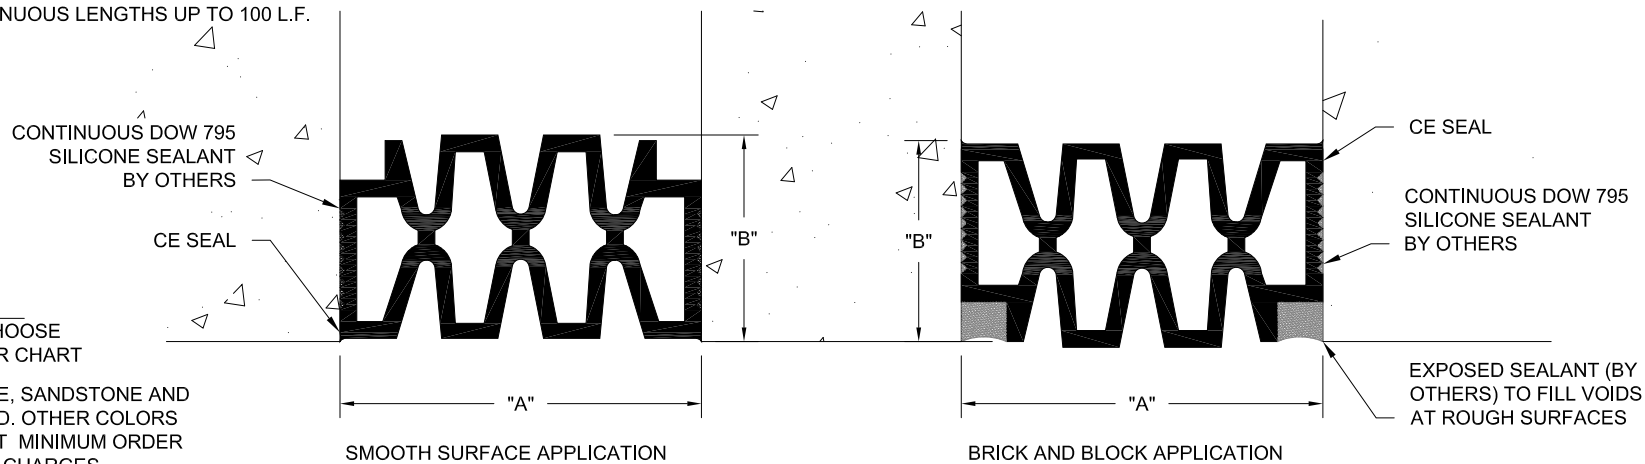

COLOR:
SILICONE COLORS: CHOOSE
FROM DOW 790 COLOR CHART


BLACK, GRAY, BRONZE, SANDSTONE AND
WHITE ARE STANDARD. OTHER COLORS
SUBJECT TO 100 FOOT MINIMUM ORDER
QUANTITY OR SET UP CHARGES.

TYPE	ACTUAL SEAL SIZE		NOMINAL JOINT DIMENSIONS		ACTUAL MOVEMENT CAPABILITY			
	WIDTH	DEPTH	WIDTH (A)	DEPTH (B)	MIN (A)	MAX THERMAL (A)	MAX SEISMIC (A) (SEAL IN TENSION)	TOTAL
CE-100SX	1 3/8" (35mm)	3/4" (19mm)	1" (25mm)	3/4" (19mm)	5/8" (16mm)	1 3/8" (35mm)	1 1/2" (38mm)	7/8" (22mm)
CE-150SX	2" (51mm)	1" (25mm)	1 1/2" (38mm)	1" (25mm)	1" (25mm)	2" (51mm)	2 1/4" (57mm)	1 1/4" (32mm)
CE-200SX	2 3/4" (70mm)	1" (25mm)	2" (51mm)	1" (25mm)	1 3/8" (35mm)	2 3/4" (70mm)	3" (76mm)	1 5/8" (41mm)
CE-300SX	4" (102mm)	1 1/2" (38mm)	3" (76mm)	1 1/2" (38mm)	1 3/4" (44mm)	4" (102mm)	4 1/2" (114mm)	2 3/4" (70mm)
CE-400SX	5" (127mm)	2" (51mm)	4" (102mm)	2" (51mm)	2 1/2" (64mm)	5" (127mm)	6" (152mm)	3 1/2" (89mm)

GENERAL SPECIFICATIONS:

COMPRESSION SEALS ARE SEISMIC JOINT SEALS EXTRUDED FROM THERMO-CURED SILICONE AND PRODUCED BY BALCO. THEY ARE SECURED WITH HIGH QUALITY COMPATIBLE SEALANT/ADHESIVES. (BY OTHERS)
THE SILICONE EXTRUSIONS MEET ASTM D2000, 4GE, 709,M, ARE UV STABILIZED AND DO NOT PROPAGATE FLAME. COLOR, AS SELECTED BY THE ARCHITECT.

NOTE: SEAL IS DESIGNED FOR VERTICAL APPLICATIONS OR HORIZONTAL APPLICATIONS WITH A POSITIVE SLOPE. NOT INTENDED TO TAKE LOADING.

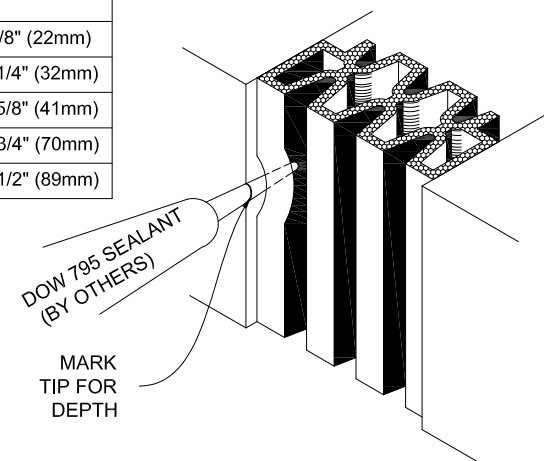

Project:	
Customer:	
SO#	
Date:	
Page ____ of ____	Scale: NTS

Length	Qty.	Color

Drawn By: RJT



The information contained herein is the proprietary property of **BALCO, INC.** No portion of it may be reproduced by any means or used in any form except for the purpose for which it was furnished. All rights of design and invention are hereby reserved.

MICHAEL RIZZA COMPANY™
Premium Silicone Systems
A Division of **BALCO INC**
www.balcousa.com • 1-800-767-0082