

D28

SPECIFICATIONS

Electronic wall mounted faucet for cold or premixed water, with a self adjusting infrared sensor. Powered by 9V battery or a 9V transformer. Chrome plated body. Sensor range is adjustable by remote control. Other sensor settings (delay in, delay out and security time) can also be adjusted by remote control. Faucet will automatically shut off after being used for more than 90 seconds. Sensor features a low battery level indicator. Other finishes available.

OPERATION

Touch free electronic faucet. The faucet is activated automatically when the user brings his hands within the sensor range, and stops when the user removes his hands.

APPLICATION

Wall mounted faucet combining an elegant design with anti-vandal features. Helps washrooms stay cleaner and save water. Prevents cross contamination.

PRODUCT AT A GLANCE



Installation	Wall mounted duct concealed.
Recommended Pressure	0.5-8.0 BAR / 7.0-116 PSI. For a pressure over 8 bar use a pressure reducing valve.
Power Supply	9V battery or a 9V Transformer.
Water Saving Options	5 LPM / 1.32 GPM ;1.89 LPM / 0.5 GPM
Water Supply	Cold or premixed water
Water temperature	Max 70°C
Security Time	90 seconds. Adjustable with Stern's remote control.

ORDERING INFORMATION

PRODUCT NAME	PART NUMBER
D28 B	352200
D28 E	352100

OPTIONAL ACCESSORIES

PRODUCT NAME	PART NUMBER
Matching Tubular Soap Dispenser - battery operated	350920
Matching Tubular Soap Dispenser - transformer operated	350925
Remote Control	07100005

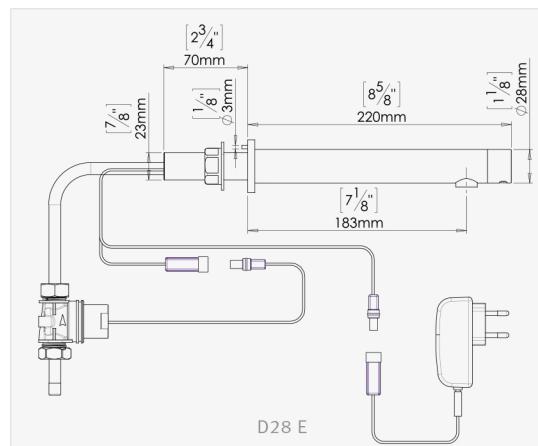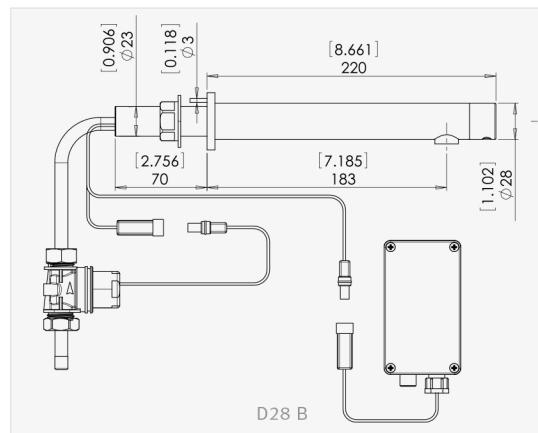

stern
STERN ENGINEERING LTD.

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



ROBUST BRASS BODY



ADJUSTABLE SETTINGS



EASY TO INSTALL

zone
architectural products

0800 508 800 | 09 623 1699
www.zone.net.nz | info@zone.net.nz
4A Edwin Street, Mt Eden, Auckland
New Zealand