

# Anomaly Detection in Wireless Sensor Networks via Support Vector Data Description with Mahalanobis Kernels and Discriminative Adjustment

Van Vuong Trinh and Kim Phuc Tran

Division of Artificial Intelligence,  
Dong A University Research Institute,  
Dong A University, Danang, Vietnam  
Email: {vuongtv, phuckt}@donga.edu.vn

Anh Tuan Mai

International Training Institute for Materials Science (ITIMS),  
Hanoi University of Science and Technology, Hanoi, Vietnam  
Email: mtuan@itims.edu.vn

**Abstract**—In the past few years, wireless sensor networks (WSNs) have been increasingly gaining impact in the real world with various applications such as healthcare, condition monitoring, control networks, etc. Anomaly detection in WSNs is an important aspect of data analysis in order to identify data items which does not conform to an expected pattern or other items in a dataset. This paper describes a anomaly detection method using support vector data description (SVDD) kernelized by Mahalanobis distance with adjusted discriminant threshold. The efficiency of this method is studied over a real data set. Numerical result demonstrates that the proposed approach achieved a high-level of detection accuracy and a low percentage of false alarm rate owing to wise choices of discriminant threshold.

**Index Terms**—Wireless sensor networks, Anomaly detection, Support vector data description, Mahalanobis kernels, Unsupervised learning.

## I. INTRODUCTION

WSNs are spatially distributed autonomous sensors to monitor physical or environmental conditions, such as temperature, vibration, pressure, motion, etc. and to cooperatively pass their data throughout the network. WSNs are increasingly employed in a range of applications including industrial processes, monitoring and control, machine health monitoring, healthcare applications and traffic control [1]. Due to the deployment of a large number of sensor nodes in uncontrolled or hostile environments, data measured and collected by WSNs is often unreliable. This will affect the modeling and scientific reasonable inference. Thus, it is significant that the anomaly of sensor node is detected in order to obtain accurate information, therefore make effective decisions by information gathered (see, for instance, [2]).

Anomaly detection is a method to identify whether or not a metric is behaving differently than it has in the past, taking into account trends. This is implemented as one-class classification since only one class is represented in the training data. In literature, a variety of anomaly detection techniques have been developed for certain application domains such as security systems, fraud detection and statistical process monitoring, for example, see [3], [4],[5], [6], [7], [8], [9],

[10], [11], [12], [13] and [14]. Recently, there have been growing interests in applying machine learning approaches for anomaly detection in WSNs. For further details see, for instance, [2], [1], [15] and [7]. Very recently, a new SVDD method [16] based on radial basis function (RBF) kernels is proposed [17] to reduce computational complexity in the training phase and the testing phase for anomaly detection of node data in WSNs. It is important to note that the advantages of support vector machines (SVMs) [18] is that we can improve generalization ability by proper selection of kernels. Mahalanobis kernels exploit the data distribution information more than RBF kernels do, see [19]. In addition, [20] shown that we can improve the performance of SVDD by using the Mahalanobis kernels.

In this contribution, we develop a SVDD using Mahalanobis kernels with adjustable discriminant threshold, with application to anomaly detection in a real WSN's data set. Then, we examine the affect of tuning the aforementioned threshold upon sensitivity of obtained detector. The remainder of the paper is organized as follows: in section II, some necessary background on SVDD are introduced; in section III, the anomaly detection approach in WSNs is defined; section IV presents an illustrative example, and finally, some concluding remarks and recommendations are made in section V.

## II. SUPPORT VECTOR DATA DESCRIPTION AND PRELIMINARIES

In this section, we recall the so-called support vector data description (SVDD) originally derived in [16], which is an alternative of one-class support vector machines (OCSVM) [21] and is analogous to the known support vector machines (SVM) [18]. The uses of Mahalanobis kernel and adjusted discrimination are also discussed. Notes that  $\mathbf{x} \cdot \mathbf{y}$  stands for inner product of two vectors  $\mathbf{x}, \mathbf{y}$  in Euclidean space.

### A. Theory of SVDD

Given  $N$  samples  $\mathbf{x}_k$ ,  $k = 1, \dots, N$ , SVDD method aims to estimate a sphere with minimum volume that contains all

(or most of) these data. It is also assumed that almost these training samples belong to an unknown distribution. Let  $\mathbf{a}$  and  $R$  being reserved for the center and the radius of the sphere, we define the objective function to minimize the volume of the sphere and the number of outliers as:

$$R^2 + C \sum_{k=1}^N \xi_k \quad (1)$$

where  $C > 0$  is a regularization parameter with constraints that almost data points are within the sphere:

$$\|\mathbf{x}_k - \mathbf{a}\|^2 \leq R^2 + \xi_k, \xi_k \geq 0 \quad \forall k \quad (2)$$

To adapt with nonspherical distribution, a conventional approach is to map given data into a higher dimensional feature space, then learning a sphere in such a new space. This results into the so-called *primal optimisation* as follows:

$$\text{Minimize } R^2 + C \sum_{k=1}^N \xi_k \quad (3a)$$

$R, \mathbf{a}, \xi$

$$\text{Subject to } \|\phi(\mathbf{x}_k) - \mathbf{a}\|^2 \leq R^2 + \xi_k, \xi_k \geq 0 \quad \forall k \quad (3b)$$

where  $\phi(\cdot)$  is the aforementioned feature mapping. The Lagrangian is hereafter written as:

$$\mathcal{L} = R^2 + C \sum_{k=1}^N \xi_k - \sum_{k=1}^N \alpha_k \left[ R^2 + \xi_k - \|\phi(\mathbf{x}_k) - \mathbf{a}\|^2 \right] - \sum_{k=1}^N \gamma_k \xi_k \quad (4)$$

with the Lagrange multipliers  $\alpha_k, \gamma_k \geq 0$ .  $\mathcal{L}$  should be minimized w.r.t.  $R, \mathbf{a}, \xi_k$  and maximized w.r.t.  $\alpha_k, \gamma_k$ .

Setting partial derivatives w.r.t.  $R, \mathbf{a}, \xi$  gives:

$$\frac{\partial \mathcal{L}}{\partial R} = 0 : \quad \sum_{k=1}^N \alpha_k = 1 \quad (5a)$$

$$\frac{\partial \mathcal{L}}{\partial \mathbf{a}} = 0 : \quad \mathbf{a} = \sum_{k=1}^N \alpha_k \phi(\mathbf{x}_k) \quad (5b)$$

$$\frac{\partial \mathcal{L}}{\partial \xi_k} = 0 : \quad \alpha_k + \gamma_k = C \quad \forall k \quad (5c)$$

Obviously, Lagrange multipliers  $\gamma_k$  can be eliminated by imposing bound constraints on  $\alpha_k$  as:

$$0 \leq \alpha_k \leq C \quad \forall k \quad (6)$$

Substituting (5a)-(5c) into (4) leads to the following *dual optimisation*:

$$\text{Maximize}_{\alpha} \sum_{k=1}^N \alpha_k (\phi(\mathbf{x}_k) \cdot \phi(\mathbf{x}_k)) - \sum_{k=1}^N \sum_{l=1}^N \alpha_k \alpha_l (\phi(\mathbf{x}_k) \cdot \phi(\mathbf{x}_l)) \quad (7a)$$

$$\text{Subject to } \sum_{k=1}^N \alpha_k = 1, 0 \leq \alpha_k \leq C \quad \forall k \quad (7b)$$

This standard quadratic program (QP) can be solved more efficiently than the primal problem. Evidently, (7) is feasible iff  $C \geq \frac{1}{N}$  [22]. Assume that such a feasibility condition holds, the following interpretation is trivial once (7) is solved.

$$\|\phi(\mathbf{x}_k) - \mathbf{a}\|^2 < R^2 \rightarrow \alpha_k = 0 \quad (8a)$$

$$\|\phi(\mathbf{x}_k) - \mathbf{a}\|^2 = R^2 \rightarrow 0 < \alpha_k < C \quad (8b)$$

$$\|\phi(\mathbf{x}_k) - \mathbf{a}\|^2 > R^2 \rightarrow \alpha_k = C \quad (8c)$$

Only data samples  $\mathbf{x}_k$  with  $0 < \alpha_k < C$  are required in the distribution's description and these will therefore be referred to as *support vectors*. This will be discussed later after we generalize the current linear SVDD into nonlinear version using kernel functions in the next sub-section.

### B. Kernelization with Mahalanobis distance

Instead of using inner product, an alternative kernel product can also be adopted:

$$\kappa(\mathbf{x}_k, \mathbf{x}_l) = \phi(\mathbf{x}_k) \cdot \phi(\mathbf{x}_l) \quad (9)$$

This is the known *kernel trick* [23], aims to avoid the need of explicitly declaring a feature mapping  $\phi(\cdot)$ .

In this paper, we investigate the performance of SVDD using the *Mahalanobis kernel*:

$$\kappa(\mathbf{x}_k, \mathbf{x}_l) = \exp \left( -\frac{(\mathbf{x}_k - \mathbf{x}_l)' S^{-1} (\mathbf{x}_k - \mathbf{x}_l)}{2\sigma} \right) \quad (10)$$

where  $S$  is the estimated covariance matrix computed with the available training data  $\mathbf{x}_k, k = 1, \dots, N$  while parameter  $\sigma$  is the kernel width.

Thus, the optimisation (7) changes into following *kernelized dual optimisation*:

$$\text{Maximize}_{\alpha} \sum_{k=1}^N \alpha_k \kappa(\mathbf{x}_k, \mathbf{x}_k) - \sum_{k=1}^N \sum_{l=1}^N \alpha_k \alpha_l \kappa(\mathbf{x}_k, \mathbf{x}_l) \quad (11a)$$

$$\text{Subject to } \sum_{k=1}^N \alpha_k = 1, 0 \leq \alpha_k \leq C \quad \forall k \quad (11b)$$

By solving this problem, one obtains, for example,  $m$  support vectors. Let  $i, j = 1, \dots, m$  being reserved for indices of these support vector. Then, sphere's radius is indeed the distance from any support vector, for instance  $\mathbf{x}_i$ , to the sphere's center:

$$R = \sqrt{\kappa(\mathbf{x}_i, \mathbf{x}_i) - 2 \sum_{i=1}^m \alpha_i \kappa(\mathbf{x}_i, \mathbf{x}_i) + \sum_{i=1}^m \sum_{j=1}^m \alpha_i \alpha_j \kappa(\mathbf{x}_i, \mathbf{x}_j)} \quad (12)$$

### C. Discrimination with threshold adjustment

This sub-section aims to establish the discriminative function for detecting anomalies. Roughly speaking, the kernel

distance, namely  $d(z, a)$ , between a test sample  $z$  and the center  $a$  of sphere will be computed:

$$d(z, a) = \sqrt{\kappa(z, z) - 2 \sum_{i=1}^m \alpha_i \kappa(z, x_i) + \sum_{k=i}^m \sum_{j=1}^m \alpha_i \alpha_j \kappa(x_i, x_j)} \quad (13)$$

Then, this distance is compared with an appropriate threshold for discrimination. A trivial choice of such a threshold is sphere's radius  $R$ . This means that the data lies within the sphere will be categorized as anomalous. However, as suggested in [24, Section 7.1], it might be better to introduce a slack variable  $\delta$  chosen *a priori* into the discriminative function. This is due to the fact that there is no guarantee that the data point outside the sphere is anomalous.

Thus, we hereafter use the following discriminative function for inclusion, where  $\mathcal{H}$  stands for the Heaviside function  $\mathcal{H}(x) = 1$ , if  $x \geq 0$  and 0 otherwise.

$$\begin{aligned} f(z) &= \mathcal{H}(d - R^2 - \delta) \\ &= \mathcal{H}\left(\kappa(z, z) - 2 \sum_{i=1}^m \alpha_i \kappa(z, x_i) - D\right) \end{aligned} \quad (14)$$

whereas the constant  $D$  can be pre-computed offline:

$$D = \kappa(x_i, x_i) - 2 \sum_{i=1}^m \alpha_i \kappa(x_i, x_i) + \delta \quad (15)$$

A probabilistic analysis on the affect of  $\delta$  upon SVDD's performance is available [24, Theorem 7.9]. Interested readers are referred to such a study and references therein for more details.

### III. DESCRIPTION OF ANOMALY DETECTION PROCEDURE FOR WSNs

This section describes the offline and online computations in our anomaly detection method. A training data set  $\mathbf{x}_k^{train}$ ,  $k = 1, \dots, N_{train}$  is mandatory, whose most samples are assumed to be belong to an unknown distribution. While this assumptions is quite realistic, the method is obviously restricted only to a cluster of sensor nodes in WSNs (or small WSNs). In addition, we also assume that all data's features have been normalized in the unit range while a fixed threshold  $\delta$  is given *a priori*. We hereafter describe how to select the hyperparameters  $(C, \sigma)$ .

For performance evaluation, the false positive and false negative rates are used in this paper. A false positive occurs when a normal sample is identified as anomalous by the detector, and a false negative occurs when an anomalous measurement is identified as normal. The *false positive rate* (FPR, or false alarm) is the ratio between false positives and the actual normal measurements, and the *false negative rate* (FNR) is the ratio between false negatives and the actual anomalous measurements. The *detection rate* (DR) is given by  $DR = 100 - FNR$ . Also, the geometric mean accuracy (g-mean) is deployed:

$$g = \sqrt{(100 - FPR) \times DR} \quad (16)$$

Nevertheless, evaluating aforementioned performance measures requires the training samples to be labelled as either normal or anomalous. In this paper, such a labeling task will be done by means of *local outlier factor* (LOF) [25], a nonparametric method to find anomalous data by measuring the local distance to its  $k$  neighbours. Then, a percentage of data, namely  $b$ , typically less than 5%, is classified as anomalous based on such local distances. Thus, the training set is splitted into the normal samples  $\{\mathbf{x}_k^{normal}\}_k$  and anomalous samples  $\{\mathbf{x}_k^{anomalous}\}_k$ .

The major drawback of using local outlier factor for labeling is that it may leads to a typical high value of FPR which is generally prohibited. However, we will show later that by choosing a sufficiently large threshold  $\delta$ , such an issue can be alleviated.

Once the data is roughly classified, the hyperparameters  $(C, \sigma)$  can be selected to optimize the g-mean criteria.

The whole procedure is summarized as below.

---

**Algorithm 1** (Anomaly detection procedure) Assume a training set  $\{\mathbf{x}_k^{train}\}_k$ , a threshold  $\delta$  and kernel  $\kappa(\cdot, \cdot)$  are given. This algorithm produces the decision function  $f(\cdot)$  defined by the constant  $D$ , the support vectors  $\mathbf{x}_i$  and corresponding Lagrange multipliers  $\alpha_i$ . It also requires the local outlier factor's parameters  $k$  and  $b$  to be set *a priori*.

---

▷ Preprocessing phase:

- 1 Split the training set  $\{\mathbf{x}_k^{train}\}_k$  using local outlier factor into  $\{\mathbf{x}_k^{normal}\}_k$  and  $\{\mathbf{x}_k^{anomalous}\}_k$ .

▷ Training phase:

- 2 For each candidate pair  $(C_s, \sigma_s)$
- 3     Solve (7) using only normal samples  $\{\mathbf{x}_k^{normal}\}_k$ .
- 4     Obtain decision function (14).
- 5     Evaluate  $g(C_s, \sigma_s)$  using both  $\{\mathbf{x}_k^{normal}\}_k$  and  $\{\mathbf{x}_k^{anomalous}\}_k$ .
- 6 Set hyperparameters as:

$$(C^*, \sigma^*) = \operatorname{argmax} g(C, \sigma) \quad (17)$$

▷ Decision phase:

- 7 For a new sample  $z$ , classify it according to (14), then raise an alarm if  $f(z) = 1$ .
- 

Generally, the candidate pair  $(C_s, \sigma_s)$  at the step 2 is belongto a finite set of candidates. Such a candidates are produced either by heuristic grid search [26] or Bayesian optimization [27]. The latter approach will be used in this paper.

### IV. ILLUSTRATIVE EXAMPLE

This section investigates the efficiency of anomaly detection algorithm over a real data set. The source code is freely available at <https://github.com/trinhvv/wsn-svdd-mk>. All computation was performed on a platform with 2.6 GHz Intel(R) Core(TM) i7 and 16GB of RAM.

### A. Data description

We consider a data set gathered from a WSN deployment at the Intel Berkeley Research Laboratory (IBRL) [28] with 54 *Mica2Dot* sensor nodes. Fig. 1 shows the sensor deployment in the laboratory. The sensors collect five measurements: light in Lux, temperature in degrees celsius, humidity (temperature corrected relative humidity) ranging from 0% to 100%, voltage in volts and network topology information in each 30 second sampling period. Node 0 is the gateway node while other nodes broadcast their data in multiple hops to the gateway node. During the 30 day (720 hour) period between 28th Feb 2004 and 5th April 2004, the 54 nodes collected about 2.3 million readings.

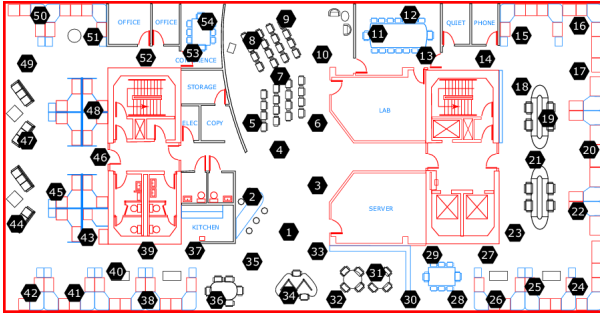


Fig. 1: A map of sensors' location. (Source: [28])

In this paper we consider the IBRL data set obtained from 5 close nodes, 1, 2, 33, 35, 37. Also, only two features, namely temperature and humidity, are taken into account. The data during the first 10 days period on March 2004 will be used as the training set. This training set contains more than 82000 samples.

In order to evaluate performance of the proposed method, we also use a testing set in some concrete time intervals. Since the original data did not contain any labels as to which data is normal and anomalous, we visually identify and label them as normal and anomalous. This data set contains about 10000 normal and 4000 anomalous samples.

### B. Numerical results

First, we use the Matlab's routine *consolidator(.)*<sup>1</sup> to reduce the cardinality of training set into only 55421 samples.

Fig. 2 shows the normal and anomalous sets produced by using LOF method whereas  $k = 50$ ,  $b = 1\%$ , 54866 normal and 555 anomalous samples are obtained. Notes however that this raw detection is likely wrong but it is helpful for computing the g-mean metric.

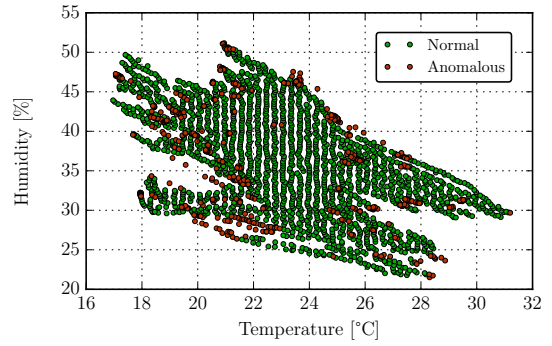


Fig. 2: LOF detection result with  $k = 50$  and  $b = 1\%$ .

These samples will be hereafter used for training the SVDD given a grid of  $\delta$ 's values as:

$$\delta \in \{0.001, 0.005, 0.01, 0.02, 0.03, 0.05, 0.1\} \quad (18)$$

For details, solutions of the kernelized dual optimisation (11) are obtained using the IBM ILOG CPLEX solver while optimal hyperparameters ( $C, \sigma$ ) are given by means of Bayesian optimization using the NLOpt package [29]. Fig. 3 illustrates obtained decision boundaries. It is evident that with  $0.01 \leq \delta \leq 0.05$ , the distribution of considered data can be well estimated.

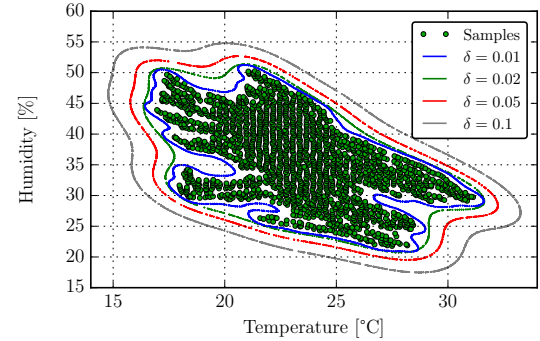


Fig. 3: Discrimination boundaries with some  $\delta$ 's values. The samples are normal data obtained from local outlier factor detection. The distribution of IBRL data is well estimated with sufficiently large threshold  $\delta$ . Also, low values of threshold  $\delta$  may lead to sensitivity of the anomaly detection algorithm.

Table 1 presents the DR and FPR obtained. Although with  $\delta \geq 0.02$ , these performance indices are surprisingly satisfactory, these results might be unreliable as well as conservative. Since the FPR is generally assumed to be about 5%, the choices of  $\delta = 0.01$  or  $0.02$  may be appropriate.

$\delta$	0.001	0.005	0.01	0.02	0.03	0.05	0.1
DR [%]	100	100	100	100	100	100	100
FPR [%]	29.61	5.66	3.45	0	0	0	0

TABLE I: DR and FPR versus  $\delta$ .

<sup>1</sup><https://mathworks.com/matlabcentral/fileexchange/8354-consolidator>

Fig. 4 depicts detection result on considered nodes over time with  $\delta = 0.02$ ,  $C = 0.5025$  and  $\sigma = 0.5039$ . While perfect DR is admitted as in the Table 1, one can observe some false alarms which is acceptable.

## V. CONCLUDING REMARKS

We presented a novel anomaly detection approach using SVDD in WSNs. Unlike the existing techniques which are all based on the RBF kernels, we developed an even more robust approach by incorporating the Mahalanobis kernels. Numerical result shown that the proposed approach achieved a high-level of detection accuracy and a low false alarm rate with appropriate discriminative threshold.

In the future, we would like to address the anomaly detection problem using autoencoder and control charts, targeting on time series data with uncertainties. We also focus on the detection ability of our proposed approach for large stream data.

## REFERENCES

- [1] M. Xie, S. Han, B. Tian, and S. Parvin, "Anomaly detection in wireless sensor networks: A survey," *Journal of Network and Computer Applications*, vol. 34, no. 4, pp. 1302–1325, 2011. [Online]. Available: <http://dx.doi.org/10.1016/j.jnca.2011.03.004>
- [2] A. Sharma, L. Golubchik, and R. Govindan, "Sensor faults: Detection methods and prevalence in real-world datasets," *ACM Transactions on Sensor Networks (TOSN)*, vol. 6, no. 3, p. 23, 2010.
- [3] J. Ilonen, P. Paalanen, J. Kamarainen, and H. Kalviainen, "Gaussian mixture pdf in one-class classification: computing and utilizing confidence values," in *Pattern Recognition, 2006. ICPR 2006. 18th International Conference on*, vol. 2. IEEE, 2006, pp. 577–580.
- [4] D. A. Clifton, S. Huguely, and L. Tarassenko, "Novelty detection with multivariate extreme value statistics," *Journal of signal processing systems*, vol. 65, no. 3, pp. 371–389, 2011.
- [5] K.P. Tran, P. Castagliola, and G. Celano, "Monitoring the Ratio of Two Normal Variables Using Run Rules Type Control Charts," *International Journal of Production Research*, vol. 54, no. 6, pp. 1670–1688, 2016.
- [6] K.P. Tran, P. Castagliola, and G. Celano, "Monitoring the Ratio of Two Normal Variables Using EWMA Type Control Charts," *Quality and Reliability Engineering International*, 2015, in press, DOI: 10.1002/qre.1918.
- [7] V. Chandola, A. Banerjee, and V. Kumar, *Anomaly Detection*. Boston, MA: Springer US, 2016, pp. 1–15.
- [8] K.P. Tran and K. P. Tran, "The Efficiency of CUSUM schemes for monitoring the Coefficient of Variation," *Applied Stochastic Models in Business and Industry*, vol. 32, no. 6, pp. 870–881, 2016.
- [9] K.P. Tran, P. Castagliola, and G. Celano, "Monitoring the Ratio of Population Means of a Bivariate Normal distribution using CUSUM Type Control Charts," *Statistical Papers*, 2016, in press, DOI: 10.1007/s00362-016-0769-4.
- [10] K.P. Tran, P. Castagliola, and N. Balakrishnan, "On the performance of shewhart median chart in the presence of measurement errors," *Quality and Reliability Engineering International*, 2016, in press, DOI: 10.1002/qre.2087.
- [11] K.P. Tran, "The efficiency of the 4-out-of-5 Runs Rules scheme for monitoring the Ratio of Population Means of a Bivariate Normal distribution," *International Journal of Reliability, Quality and Safety Engineering*, 2016, in press, DOI: 10.1142/S0218539316500200.
- [12] K.P. Tran, "Run Rules median control charts for monitoring process mean in manufacturing," *Quality and Reliability Engineering International*, 2017, in press, DOI: 10.1002/qre.2201.
- [13] T.V. Vuong, K.P. Tran, and T. Truong, "Data driven hyperparameter optimization of one-class support vector machines for anomaly detection in wireless sensor networks," in *Proceedings of the 2017 International Conference on Advanced Technologies for Communications*, 2017.
- [14] L. Billy, N. Wijerathne, B. K. K. Ng, and C. Yuen, "Sensor fusion for public space utilization monitoring in a smart city," *IEEE Internet of Things Journal*, 2017.
- [15] S. Rajasegarar, C. Leckie, and M. Palaniswami, "Hyperspherical cluster based distributed anomaly detection in wireless sensor networks," *Journal of Parallel and Distributed Computing*, vol. 74, no. 1, pp. 1833–1847, 2014. [Online]. Available: <http://dx.doi.org/10.1016/j.jpdc.2013.09.005>
- [16] D. M. J. Tax and R. P. W. Duin, "Support Vector Data Description," *Machine Learning*, vol. 54, no. 1, pp. 45–66, 2004.
- [17] Z. Feng, J. Fu, D. Du, F. Li, and S. Sun, "A new approach of anomaly detection in wireless sensor networks using support vector data description," *International Journal of Distributed Sensor Networks*, vol. 13, no. 1, p. 1550147716686161, 2017.
- [18] V. N. Vapnik, *Statistical Learning Theory*, 1998, vol. pp.
- [19] S. Abe, "Training of support vector machines with mahalanobis kernels," *Artificial Neural Networks: Formal Models and Their Applications—ICANN 2005*, pp. 750–750, 2005.
- [20] E. Maboudou-Tchao, I. Silva, and N. Diawara, "Monitoring the mean vector with mahalanobis kernels," *Quality Technology & Quantitative Management*, pp. 1–16, 2016.
- [21] B. Schölkopf, J. C. Platt, J. Shawe-Taylor, A. J. Smola, and R. C. Williamson, "Estimating the support of a high-dimensional distribution," *Neural computation*, vol. 13, no. 7, pp. 1443–1471, 2001.
- [22] W.-C. Chang, C.-P. Lee, and C.-J. Lin, "A revisit to support vector data description," *Dept. Comput. Sci., Nat. Taiwan Univ., Taipei, Taiwan, Tech. Rep.*, 2013.
- [23] B. Schölkopf, "The kernel trick for distances," *Advances in Neural Information Processing Systems 13*, vol. 13, pp. 301–307, 2001.
- [24] J. Shawe-Taylor and N. Cristianini, *Kernel methods for pattern analysis*. Cambridge university press, 2004.
- [25] M. M. Breunig, H.-P. Kriegel, R. T. Ng, and J. Sander, "Lof: identifying density-based local outliers," in *ACM sigmod record*, vol. 29, no. 2. ACM, 2000, pp. 93–104.
- [26] A. Theissler and I. Dear, "Autonomously determining the parameters for svdd with rbf kernel from a one-class training set."
- [27] J. Mockus, *Bayesian approach to global optimization: theory and applications*. Springer Science & Business Media, 2012, vol. 37.
- [28] P. Buonadonna, D. Gay, J. M. Hellerstein, W. Hong, and S. Madden, "TASK: Sensor network in a box," *Proceedings of the Second European Workshop on Wireless Sensor Networks, EWSN 2005*, vol. 2005, pp. 133–144, 2005.
- [29] S. G. Johnson, "The nlopt nonlinear-optimization package," <http://ab-initio.mit.edu/nlopt>.

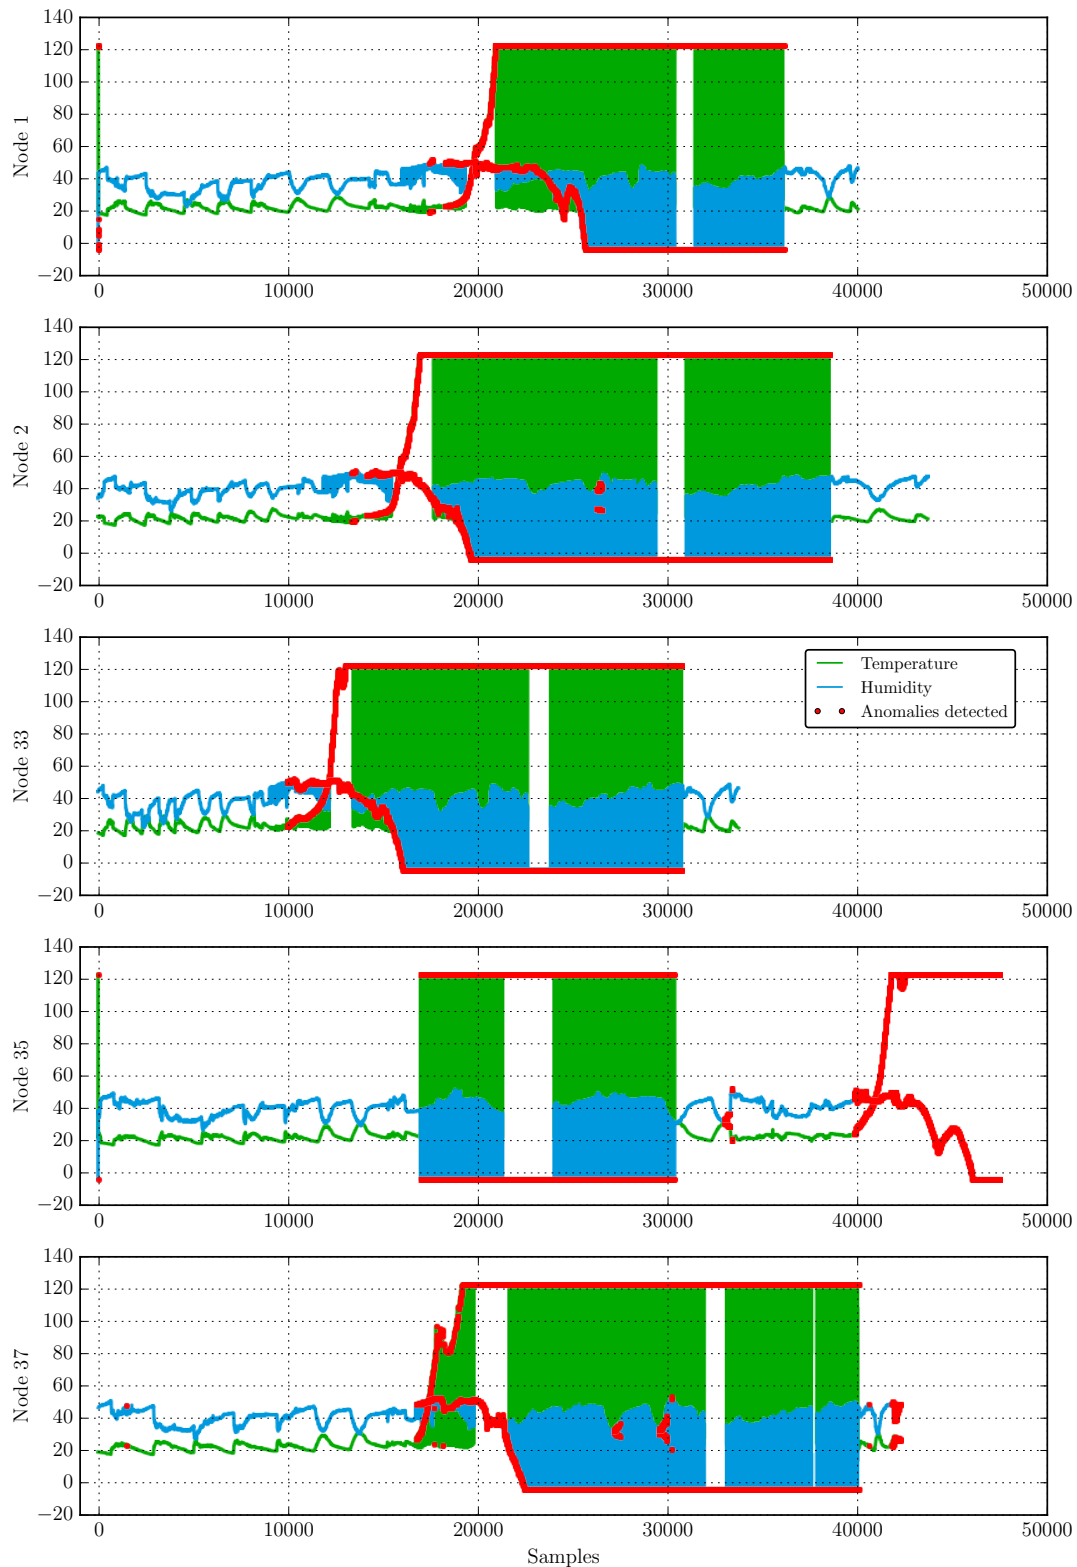


Fig. 4: Anomaly detection validation upon whole IBRL data set on 5 nodes. All apparent anomalies, i.e. temperature and humidity measurements that are too high or too low, are detected. Although nodes 35 and 37 exhibit several false alarms, such a fault detection is unavoidable and acceptable in practice.