


WS2811 Pixel tester with ESP32 MCU and resistive touch screen interface



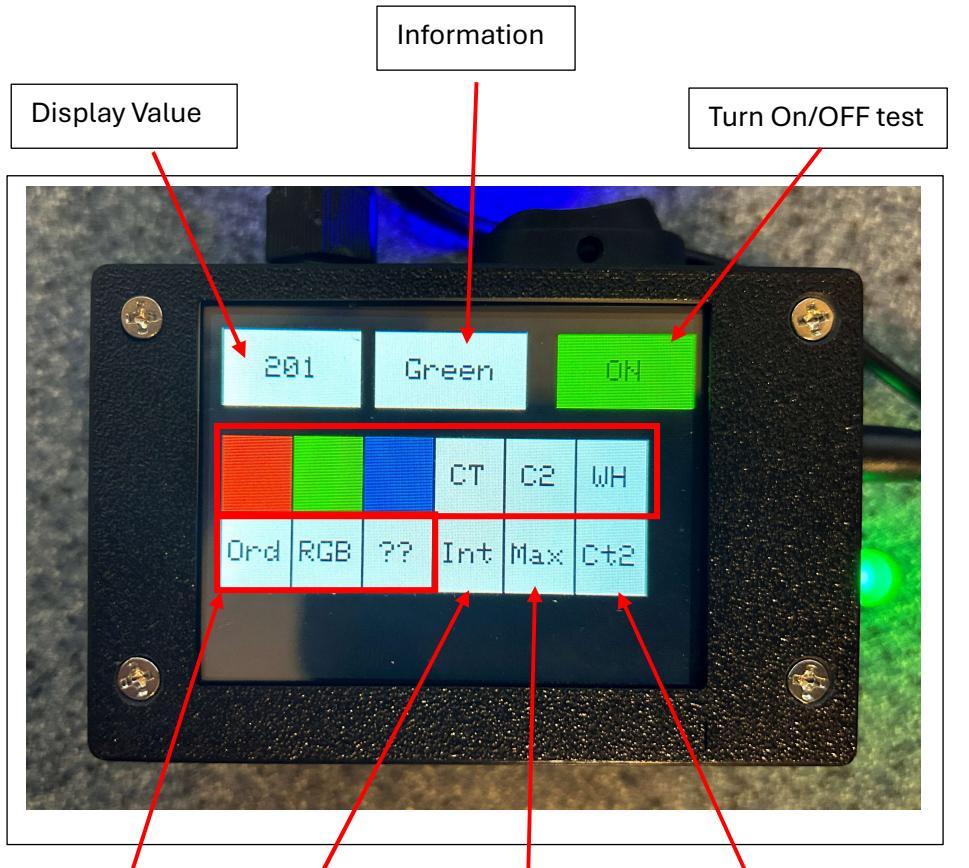


Change "Intensity" (1-254)


Change "Count To" (1-254)

Change "Test Length" (1-254)


Modes: All Red, All Green, All Blue, Count (every 5 Red, every 10 Green, every 50 Blue, every 100 White), Count To a Preset, Show Order (Ord: 1 Red, 2 Green, 3 Blue), All Run (Red, Green, Blue). Change RGB order.

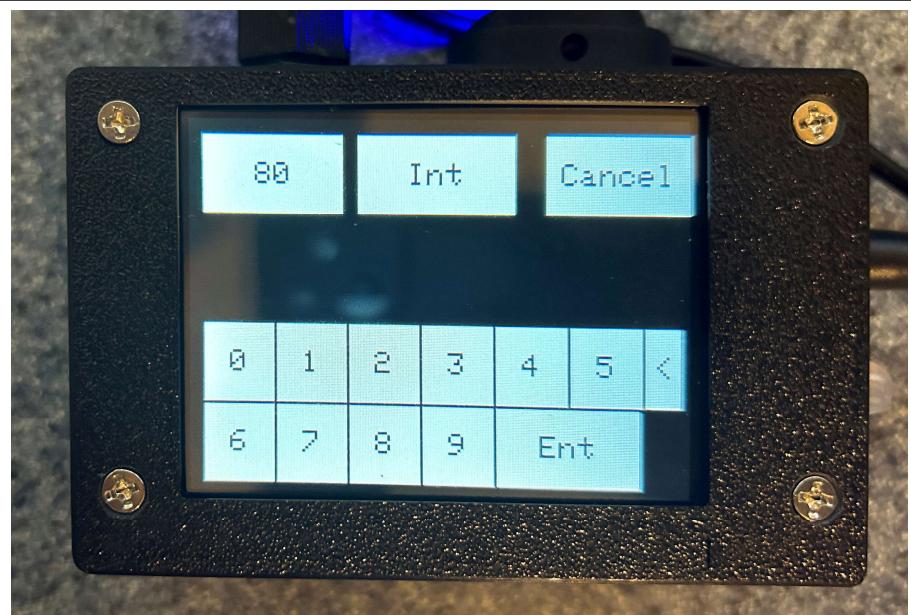



Change “Intensity” (1-255)

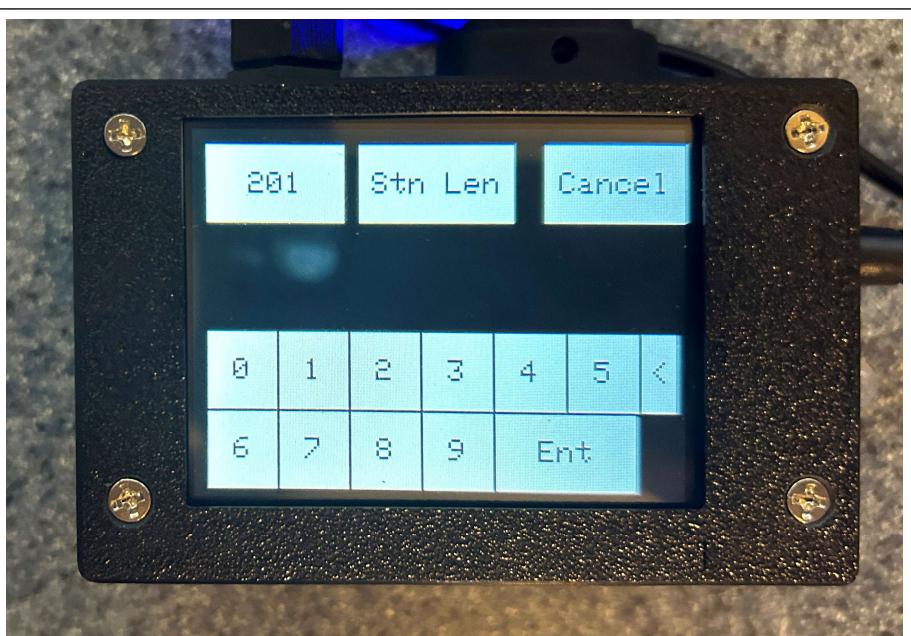


Change “Test Length” (1-255)

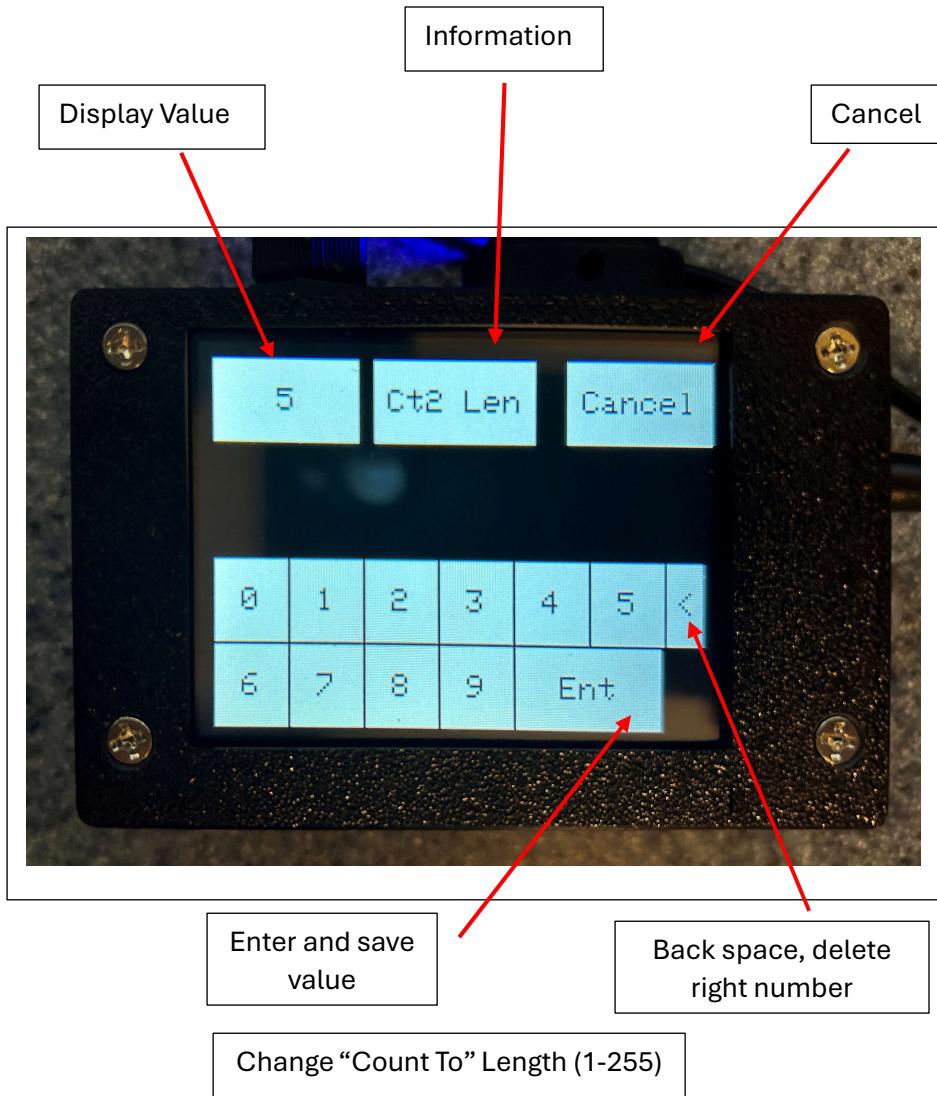

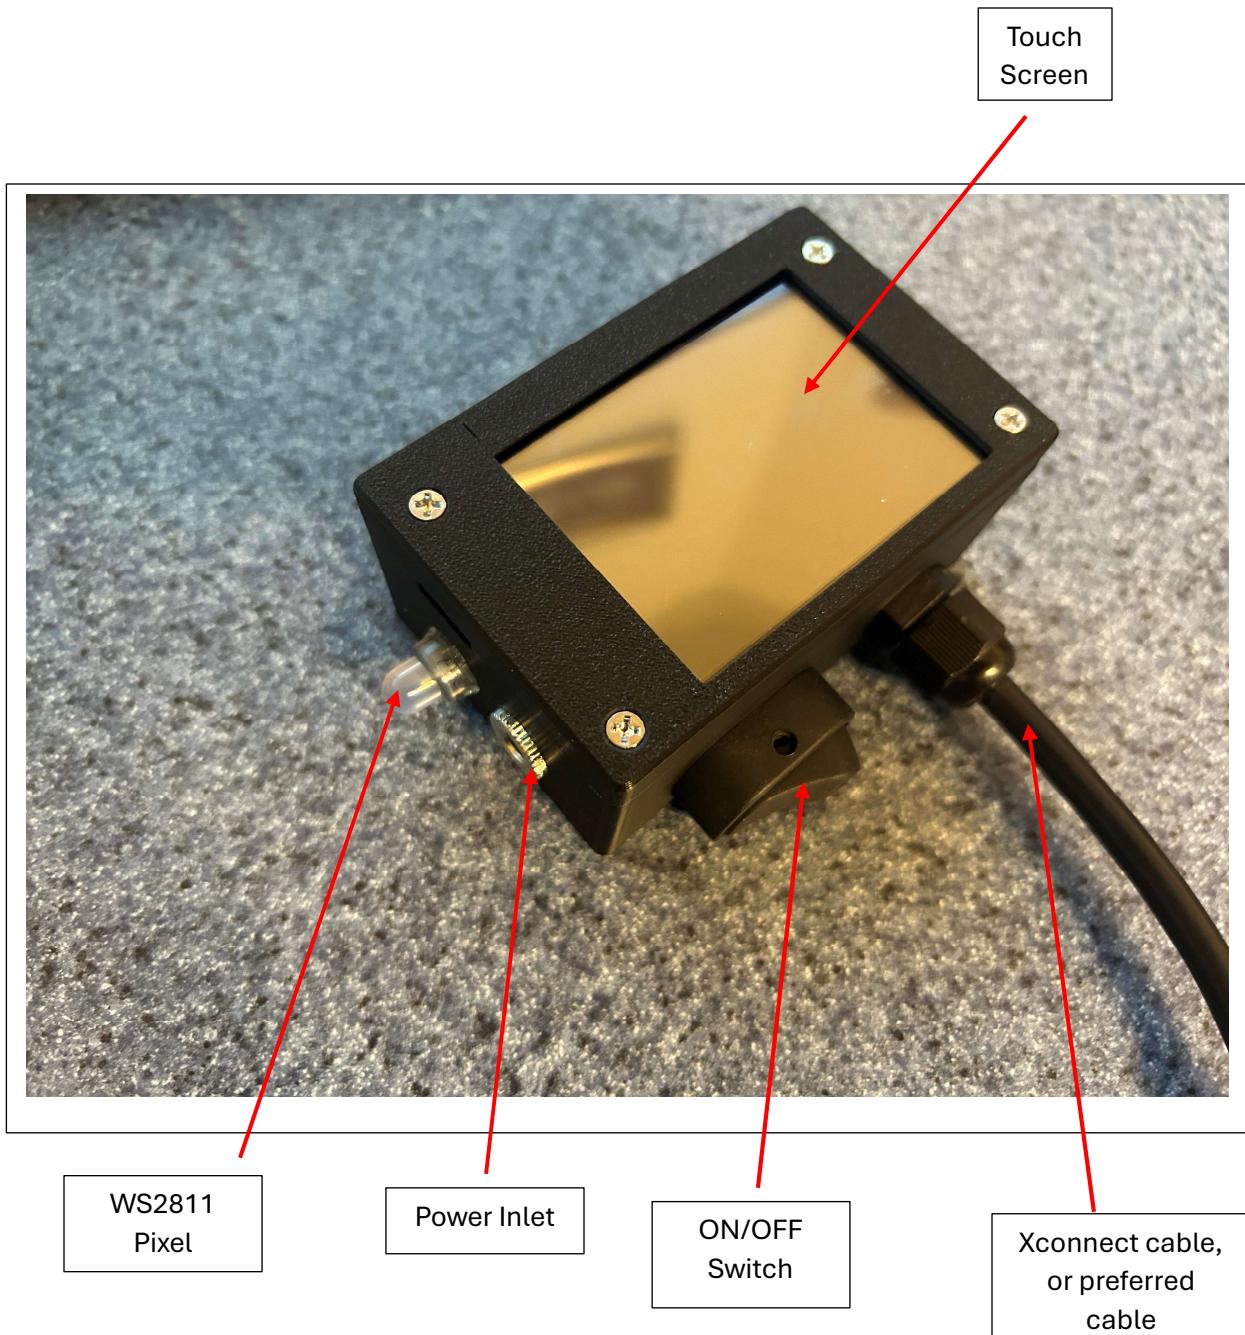

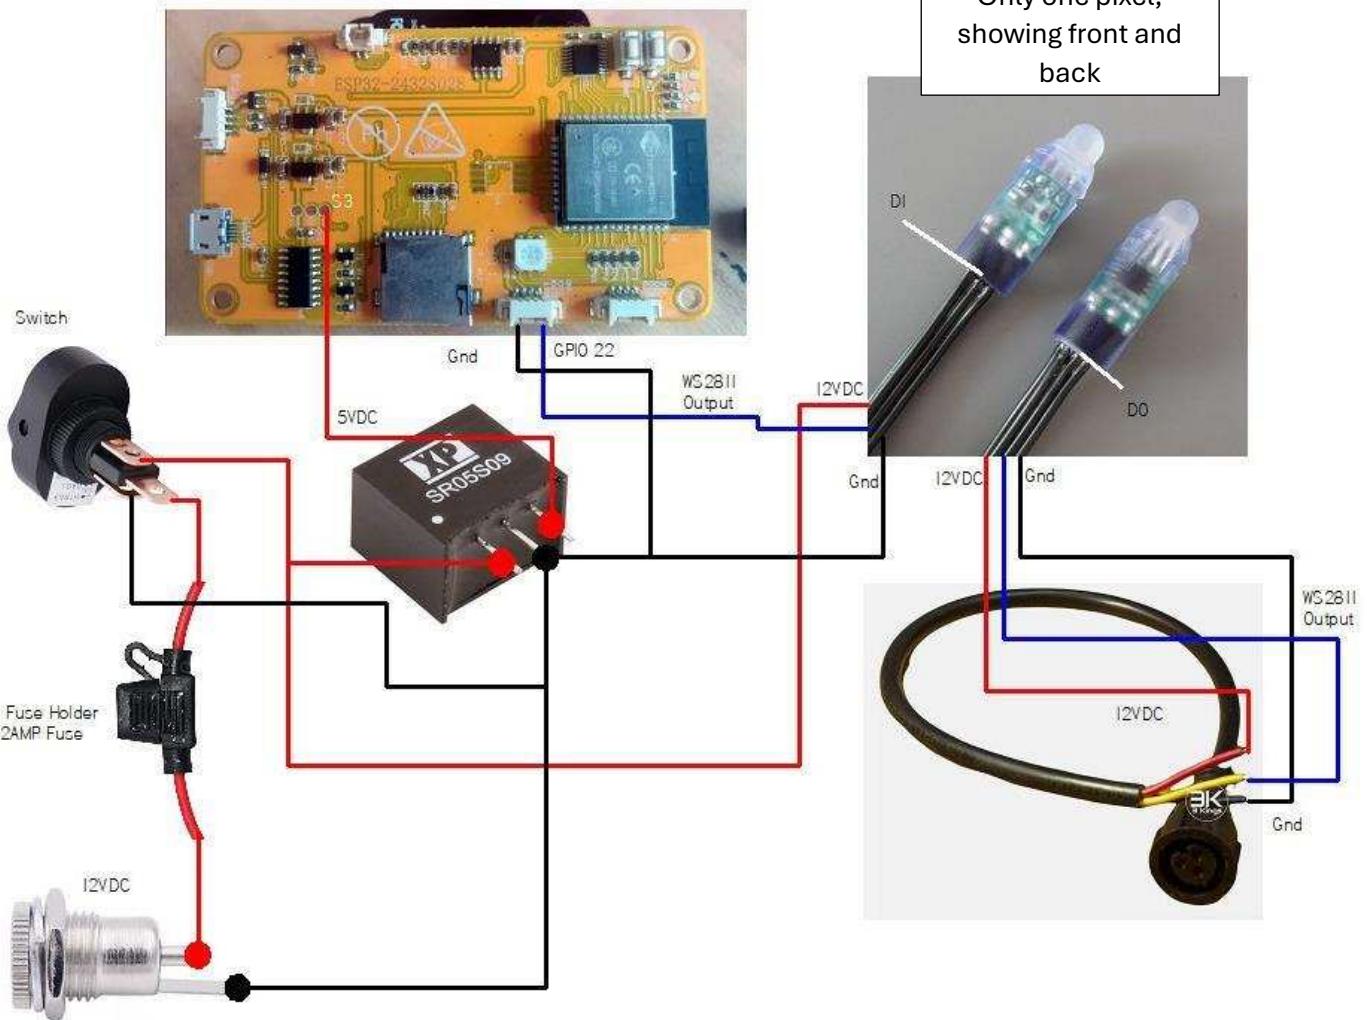

12VDC Wiring

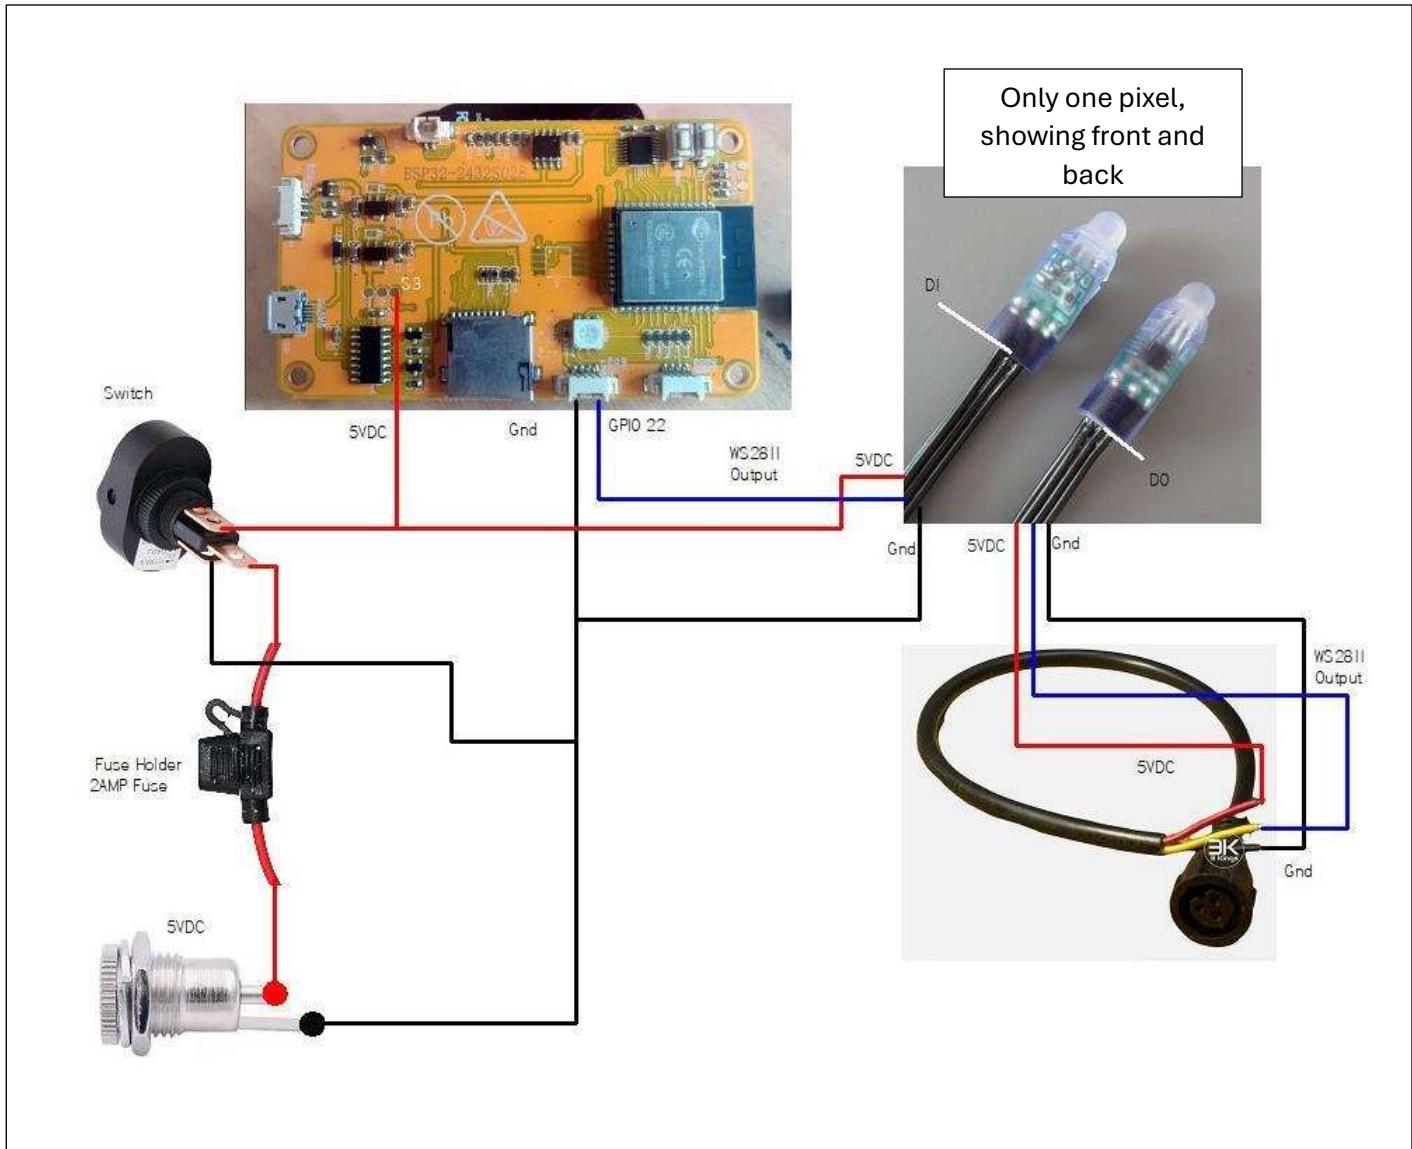

5VDC Wiring