
VIEW FROM BELOW (−Z), outside (cosmetic) face — scale 1:1

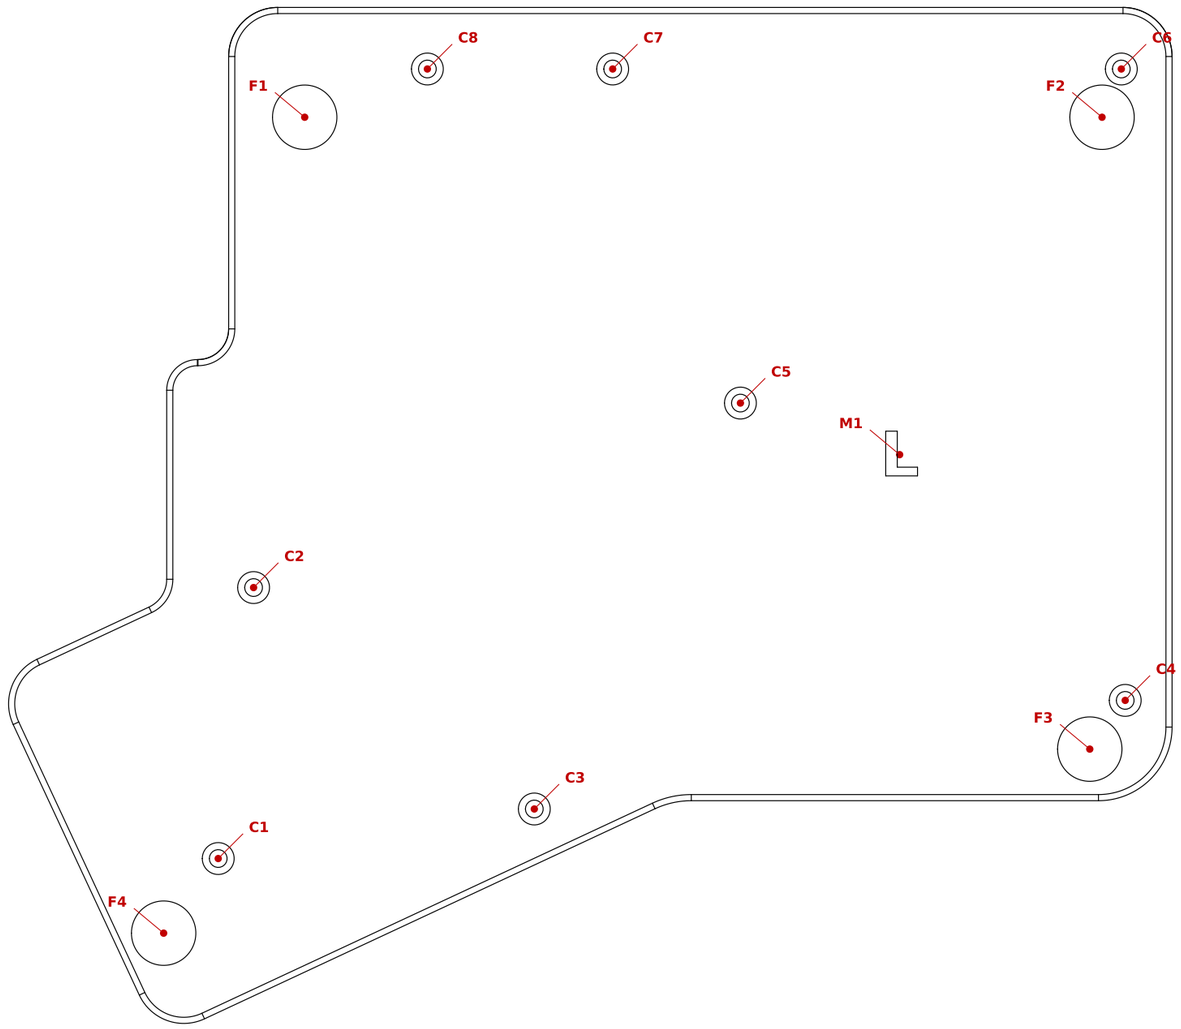

ID	Feature	X	Y	Note
C1	Ø2.9 THRU, 90° CSK Ø5.2	76.10	-65.84	M2.5x12 countersunk screw into T1
C2	Ø2.9 THRU, 90° CSK Ø5.2	70.34	-21.67	M2.5x12 countersunk screw into T2
C3	Ø2.9 THRU, 90° CSK Ø5.2	24.56	-57.76	M2.5x12 countersunk screw into T3
C4	Ø2.9 THRU, 90° CSK Ø5.2	-71.78	-40.06	M2.5x12 countersunk screw into T4
C5	Ø2.9 THRU, 90° CSK Ø5.2	-9.04	8.41	M2.5x12 countersunk screw into T5
C6	Ø2.9 THRU, 90° CSK Ø5.2	-71.14	62.87	M2.5x12 countersunk screw into T6
C7	Ø2.9 THRU, 90° CSK Ø5.2	11.79	62.87	M2.5x12 countersunk screw into T7
C8	Ø2.9 THRU, 90° CSK Ø5.2	42.00	62.87	M2.5x12 countersunk screw into T8
F1	Ø10.5 x 0.6 deep recess	62.00	55.00	rubber foot
F2	Ø10.5 x 0.6 deep recess	-68.00	55.00	rubber foot
F3	Ø10.5 x 0.6 deep recess	-66.00	-48.00	rubber foot
F4	Ø10.5 x 0.6 deep recess	85.00	-78.00	rubber foot
M1	engraved 'L', 10 high x 0.4 deep	-35.00	-0.00	side mark, reads from below

X/Y in STEP coordinates; features are on the underside (Z = 0).

GENERAL NOTES

1. Geometry per worxboard_left_bottom.step. Dimensions not shown are taken from the STEP model.
2. Material: Aluminium 6061-T6 (7075-T6 acceptable).
3. NO THREADS in this part. C1-C8: clearance holes with 90° countersink for M2.5 ISO 10642 / DIN 7991 style countersunk screws; heads must sit flush or up to 0.2 below the underside.
4. The USB-C slot of the top part continues 0.8 mm into the back wall of this part, through the wall, 13.0 +0.2/0 wide (see STEP). M1: engraved side mark, cosmetic.
5. FIT-CRITICAL, tighter than the general tolerance: C1-C8 positions ±0.1 hole to hole (they match T1-T8 of the top part and the PCB's holes). The tops of the 8 posts round C1-C8 and the parting face (top of the wall) lie in one plane within 0.05: the PCB rests on the posts, the top part on the wall. Overall size 189.7 x 165.6 x 7.0 (reference).
6. Dimensions and tolerances apply AFTER finishing. Anodizing rack / contact marks on inside (non-cosmetic) faces only.
7. Internal corners: boss-web fillets R1.0 (4.0 deep, R = depth/10 + 0.5); tray corners R2 and larger.
8. This is a LEFT-hand part: a mirror image of the right-hand part.
9. Cosmetic surfaces: underside and outer walls: no tool marks, scratches or clamp marks. Inside (pocket) surfaces are non-cosmetic.
10. Break sharp edges 0.1-0.2 mm unless modelled.
11. Finish: Fine bead blast + anodize Type II, colour per order.

worxboard CNC aluminium case

worxboard_left_bottom — https://github.com/w0rxbend/worxboard

Drawing no.: WXB-BOTTOM-L	Sheet 1 of 1
Material: Aluminium 6061-T6 (7075-T6 acceptable) Finish: Fine bead blast + anodize Type II, colour per order	Scale 1:1 Units: mm
Revision A5 Date 2026-11-12 General tolerance ISO 2768-mK unless noted. Threads ISO metric, RIGHT-HAND, 6H. The STEP file governs geometry; this drawing governs threads, tolerances, finish.	Do not scale drawing