VIEW A — bearing face (−Z), scale 2.5:1

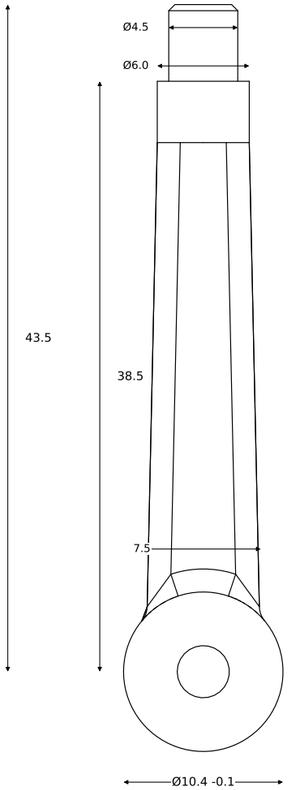

Pivot axis = origin of the STEP model.
Arm along +Y, bearing face at Z = 0.

VIEW B — side (+X), scale 2.5:1, hidden lines dashed

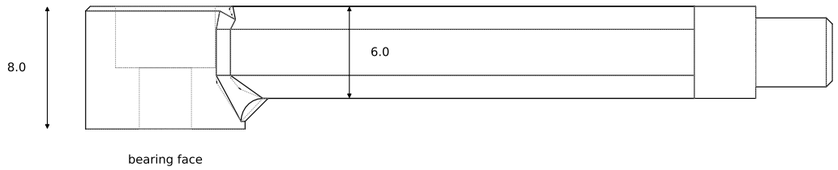

DETAIL D — bearing face, scale 6:1 (FLAT, NO TEETH)

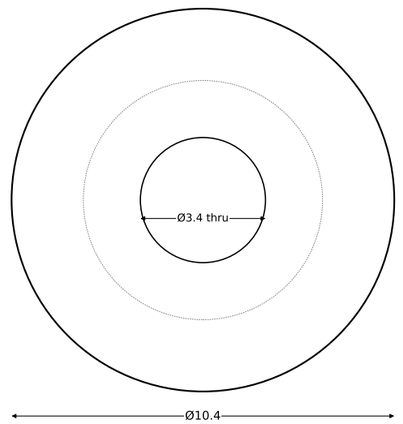

counterbore Ø6.5 x 4.0 deep, from the back face (dashed, hidden)

Bearing face	
Bearing face	Z = 0, FLAT, no teeth, Ø3.4 to Ø10.4. Flatness 0.05, perpendicular to the bore within 0.05. Ra 1.6 max
Function	clamped against the flat case boss (drawing WXB-TOP sheet 2) by the M3 spring thumbscrew; the leg holds its angle by friction

Feature	Specification
Hub	Ø10.4 -0.1 x 8.0 long (face to back face), back edge chamfer 0.3x45°
Bore	Ø3.4 +0.1/0 THROUGH (M3 clearance, NO THREAD), on the pivot axis
Counterbore	Ø6.5 +0.1/0 x 4.0 deep from the back face (spring seat)
Arm	7.5 wide at hub tapering to 6.0, 6.0 thick, flush with the back face, long edges R1.5, joint to the hub R1.5
Neck / spigot	Ø6.0 to 38.5 from axis; spigot Ø4.5 -0.05 x 5.0 for the foot cap, end chamfer 0.4
Length	43.5 axis to spigot end; 47 to foot tip with cap

GENERAL NOTES

1. Geometry per worxboard_leg.step. Dimensions not shown are taken from the STEP model.
2. Material: Aluminium 6061-T6 (7075-T6 acceptable). QUANTITY: 6 pcs (3 per keyboard half; identical, not handed).
3. NO THREADS in this part. An M3 thumbscrew passes through the Ø3.4 bore into the M3 thread of the case boss (its reach past the boss face is limited per drawing WXB-TOP sheet 2).
4. Bearing face: flat, no burrs, no raised tool marks.
5. Break sharp edges 0.1-0.2 mm.
6. Finish: Fine bead blast + anodize Type II, colour per order; same colour as the case. Dimensions and tolerances apply AFTER finishing. Anodizing rack / contact marks on inside (non-cosmetic) faces only.
7. Foot caps are not machined: worxboard_leg_cap_tree (8 TPU 95A caps on one runner, 3D-printed), snipped off and pushed onto the spigot.

worxboard CNC aluminium case

worxboard_leg — https://github.com/w0rxbend/worxboard

Drawing no.: WXB-LEG	Sheet 1 of 1
Material: Aluminium 6061-T6 (7075-T6 acceptable)	Scale 2.5:1, 6:1
Finish: Fine bead blast + anodize Type II, colour per order	Units: mm
Revision A5 Date 2026-11-12	Do not scale drawing
General tolerance ISO 2768-mK unless noted. Threads ISO metric, RIGHT-HAND, 6H.	
The STEP file governs geometry; this drawing governs threads, tolerances, finish.	