


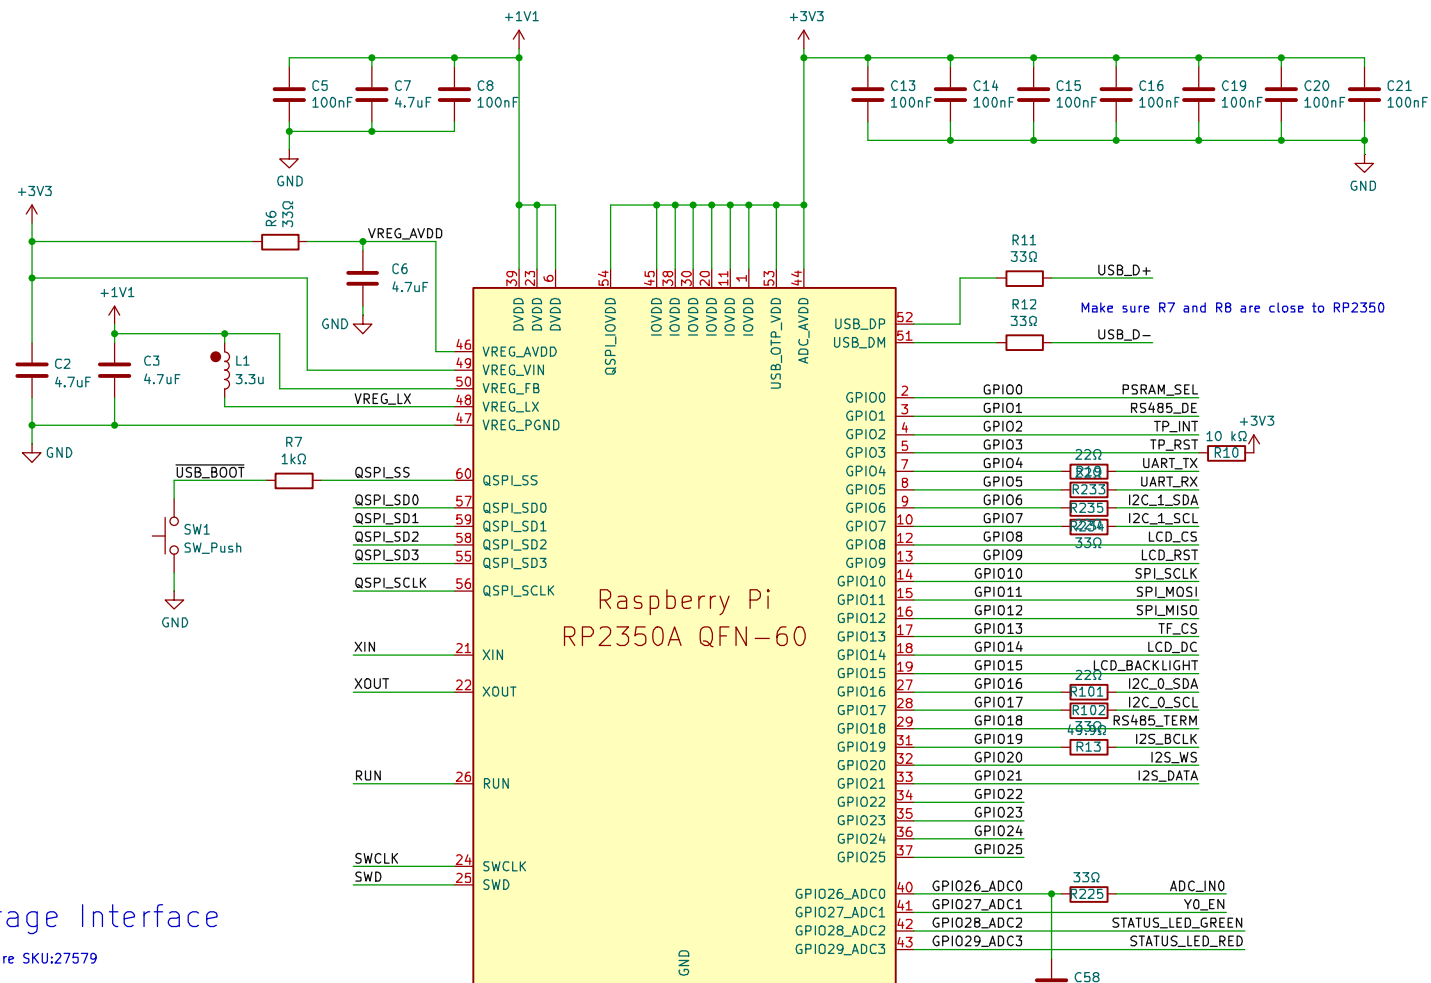




Note:
Waveshare support confirmed that these M2.5 mounting holes are placed 4.5mm (hole-center to board edge).



I2C (Qwiic) Interfaces

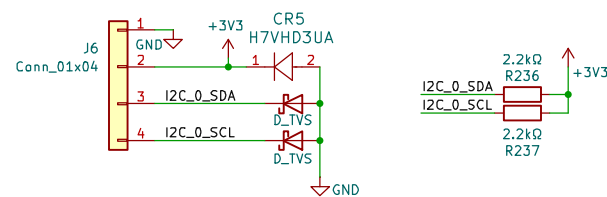




Inter-board RS-485 UART Interface

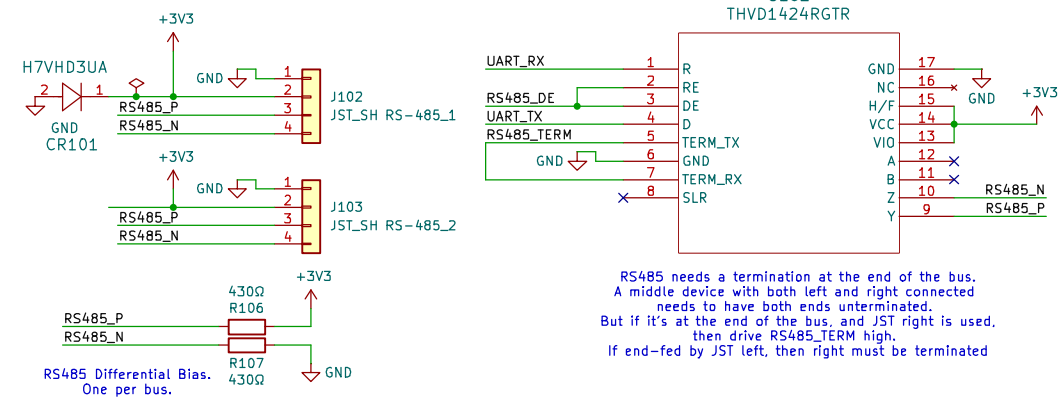



RS485 needs a termination at the end of the bus. A middle device with both left and right connected needs to have both ends unterminated. But if it's at the end of the bus, and JST right is used, then drive RS485_TERM high. If end-fed by JST left, then right must be terminated

Display and Storage Interface



Pinout for Waveshare SKU:27579

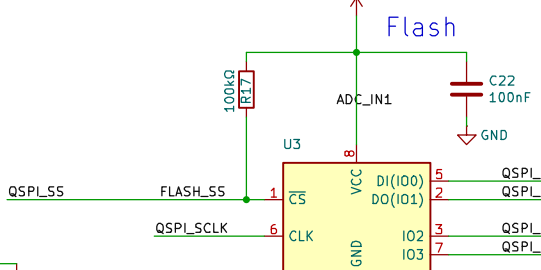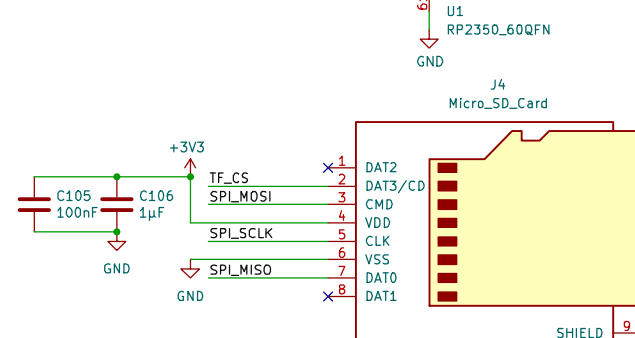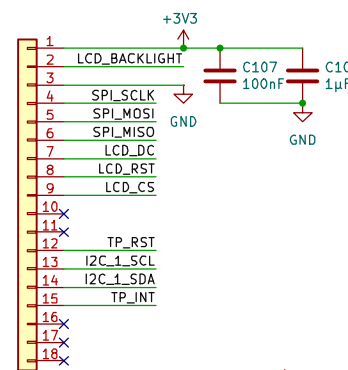


Power

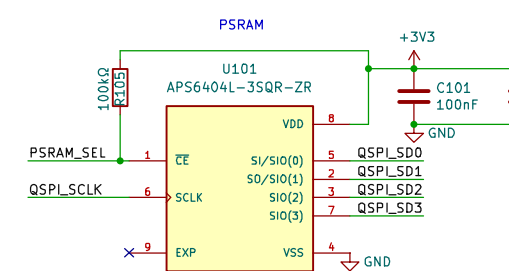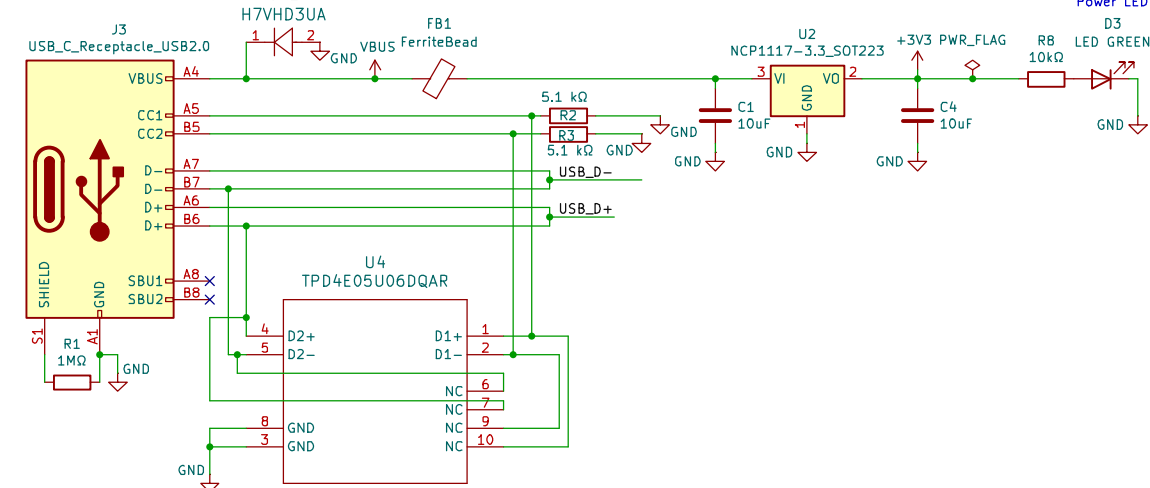

12MHz Crystal

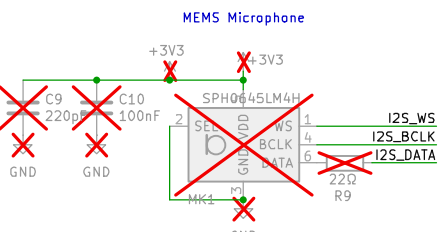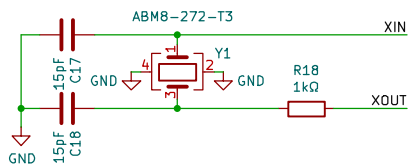

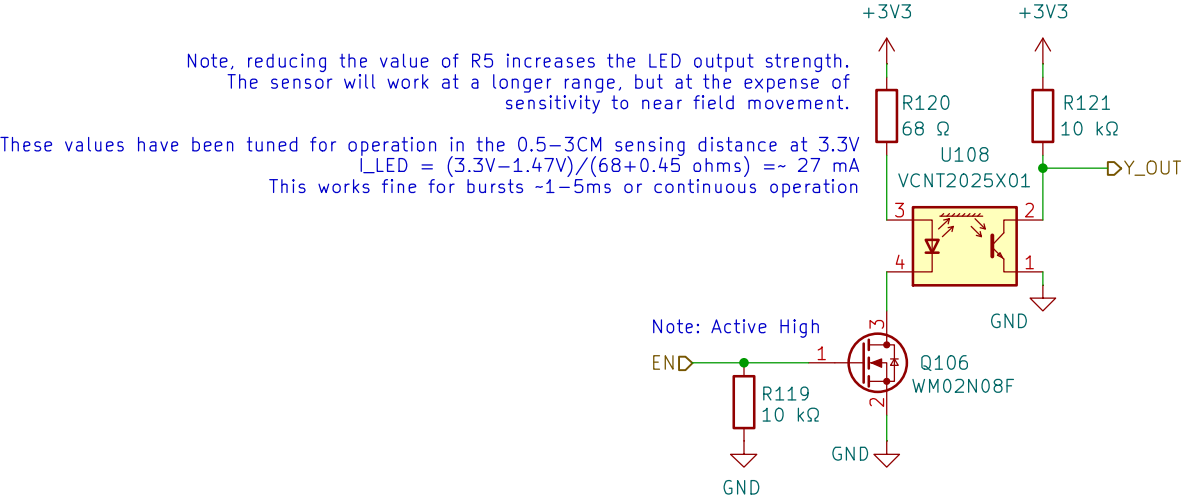

Noah Jaffe

Sheet: /Individual VCNT2025x01 Sensor/
File: Indiv_sensor.kicad_sch

Title:

Size: A4

Date: 2026-04-22

Rev: A

KiCad E.D.A. 9.0.7

Id: 2/2