




WIRE INSERTION SIDE

TIMER INFORMATION			TIME CHART - 90 SECONDS PER INCREMENT																		
CAM NO.	CIRCUIT	FUNCTION	5	10	15	20	25	30	35	40	45	50	55								
0	LI TO SW	LINE SWITCH	X	X	X	X	X	X	X	X	X	X	X								
2	21 TO 9 21 TO 32	REVERSING SPIN REVERSING AGITATE	X	X	X	X	X	X	X	X	X	X	X								
4	22 TO 9 22 TO 32	REVERSING AGITATE REVERSING SPIN	X	X	X	X	X	X	X	X	X	X	X								
6	16 TO 32	MOTOR INTERRUPTER	X	X	X	X	X	X	X	X	X	X	X								
8	TM TO 16	TIMER MOTOR BYPASS	X	X	X	X	X	X	X	X	X	X	X								
10	TM TO 7N 7N TO 7N	SPIN & TIMER MOTOR BYPASS SOAK LIGHT	X	X	X	X	X	X	X	X	X	X	X								
12	SW TO 5B SW TO 7T	RINSE FILL WASH FILL	X	X	X	X	X	X	X	X	X	X	X								
14	3 TO 5B 12 TO 5B	WASH FILL SUB-INTERVAL FILL	X	X	X	X	X	X	X	X	X	X	X								
<div><input type="checkbox"/> CAM OPEN</div> <div><input checked="" type="checkbox"/> CAM CLOSED EXCEPT FOR SHORT PAUSE</div> <div><input checked="" type="checkbox"/> CAM CLOSED</div> <div><input checked="" type="checkbox"/> CAM MAY BE OPEN OR CLOSED</div> <div><input checked="" type="checkbox"/> CAM OPEN FOR 45 SECONDS CLOSED FOR 15 THEN OPEN FOR 30 SECONDS</div>			FUNCTION																		
			OFF	FILL & WASH		COOL DOWN FILL & AGITATE		SPIN FILL & RINSE SPIN & SPRAY		OFF		FILL & AGITATE PAUSE AGITATE SPIN & SPRAY FILL & RINSE SPIN & SPRAY		OFF		FILL & WASH INFINITE SOAK		FILL & WASH		SPIN & SPRAY SPIN FILL & RINSE SPIN & SPRAY	
			CYCLE	PERMANENT PRESS		DELICATES		INFINITE SOAK		REGULAR FABRICS											


PC1-RED-LINE LID CLOSED
PC2-BLACK-LINE
PC3-GREEN-NEUTRAL FULLTUB
PC4-YELLOW-NEUTRAL

SS K1 and SS K2 take full motor current: 7.5A

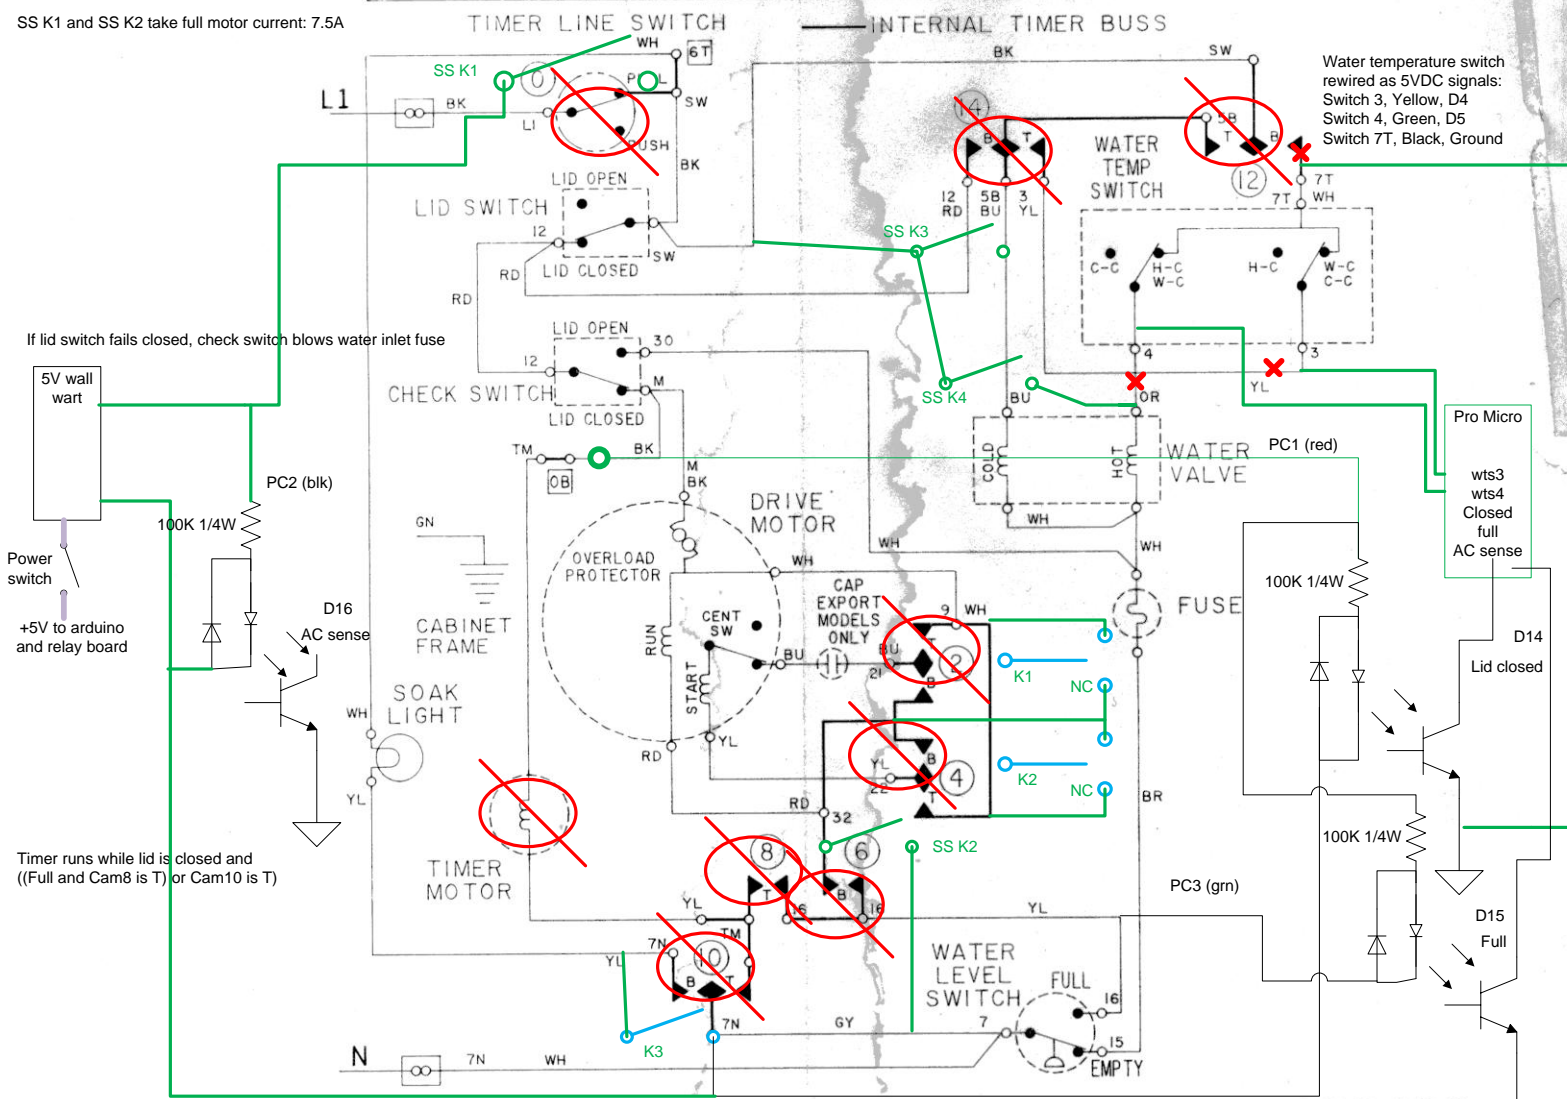

578VA-1193

2163430

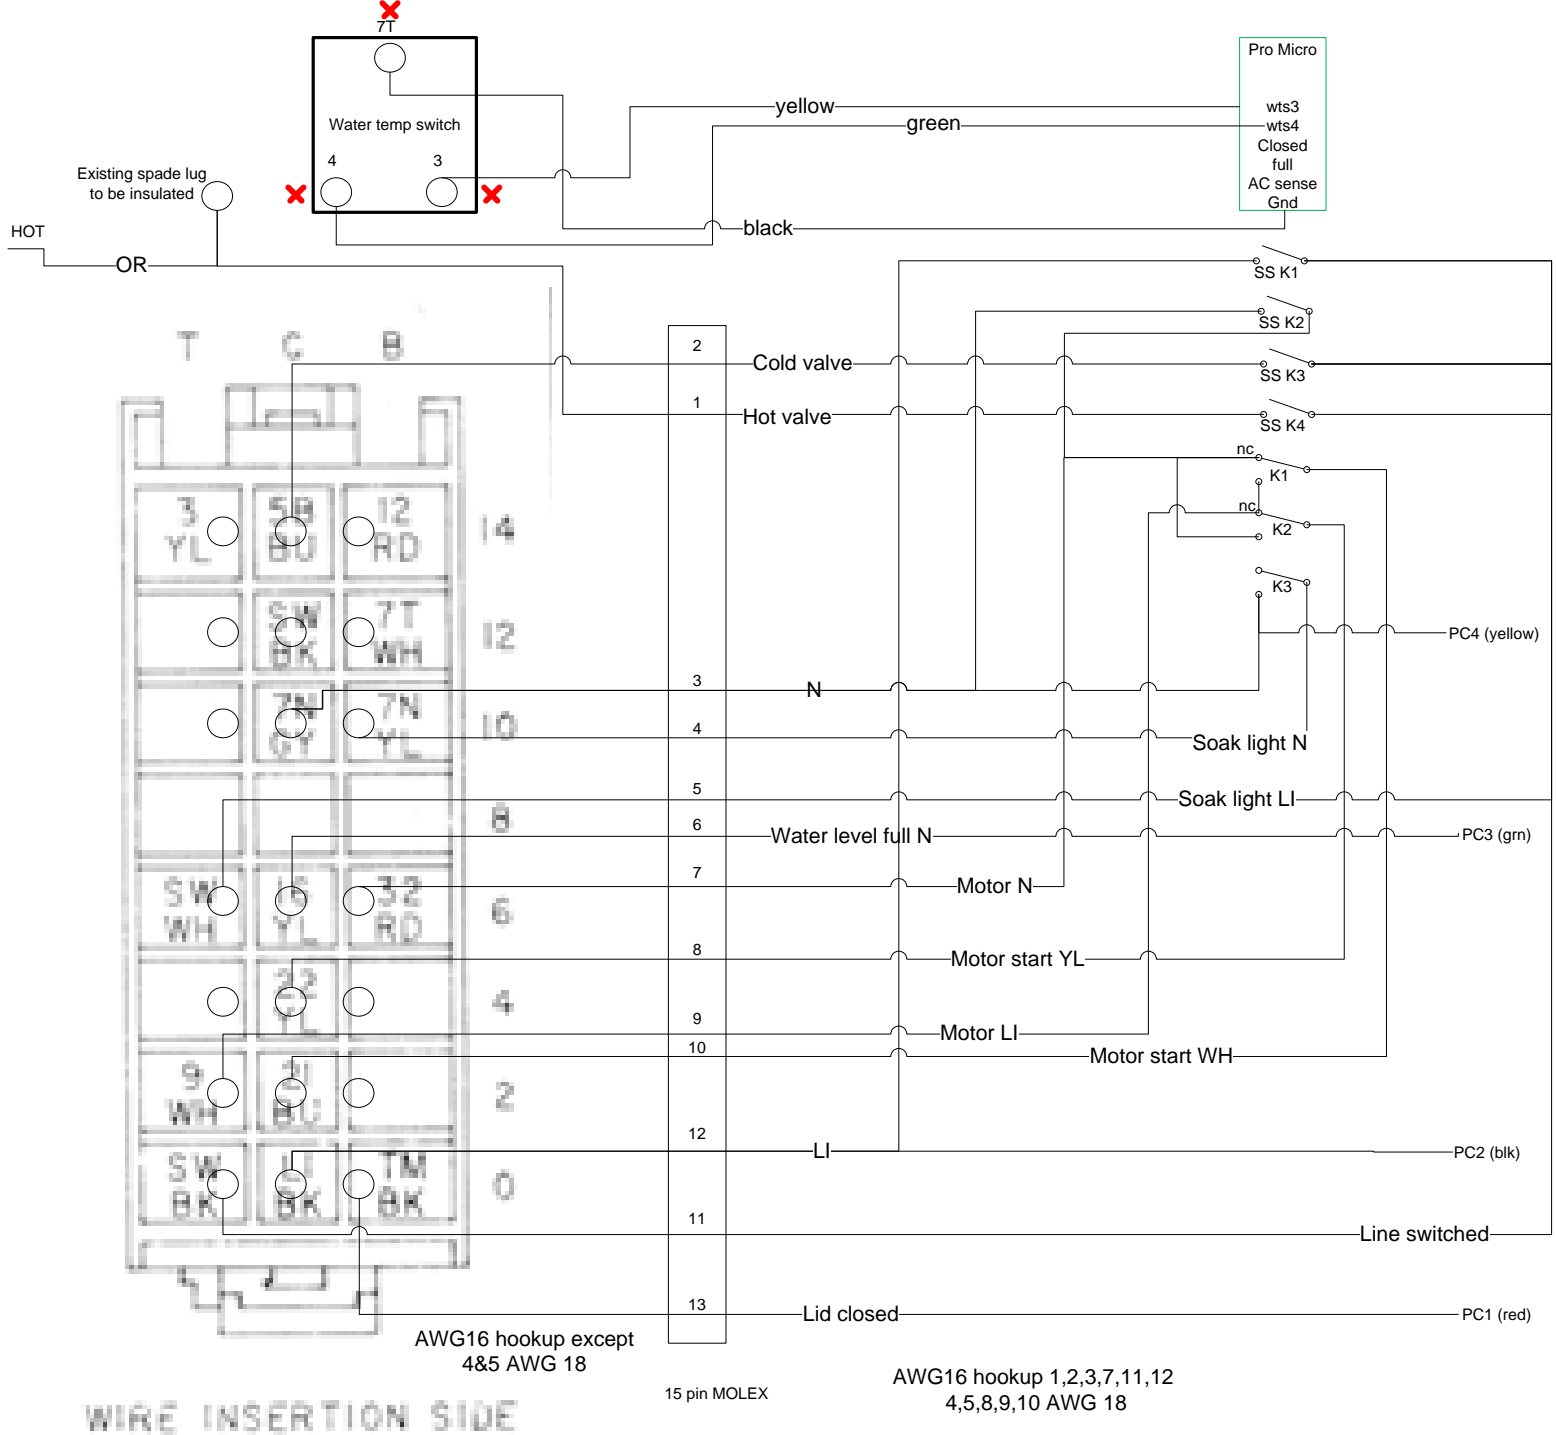

Stagger the lengths of the wires from the MOLEX to the existing harness to ease installing the tap connections. The longest about 5" longer than shortest.

Not shown: LI and N to 110VAC blades on 5V wall wart