

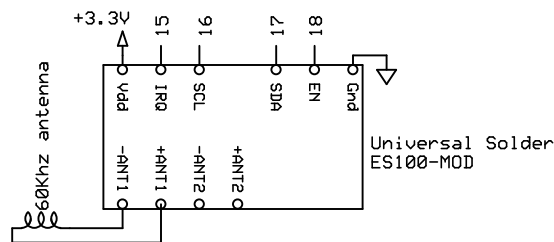




Overvoltage protection



internal solder jumper pull ups activated

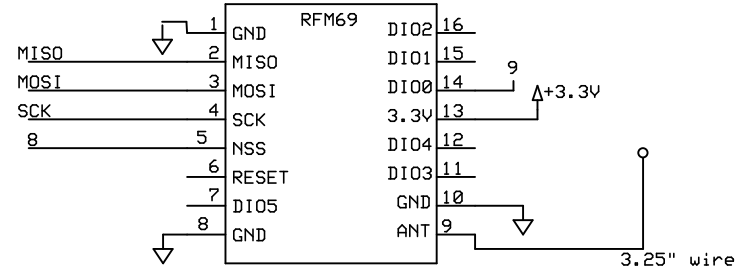


to make 2nd LED socket primary, no LED1 cut/solder Sel jumper at LED1 position and at LED1 jumper Di to Do

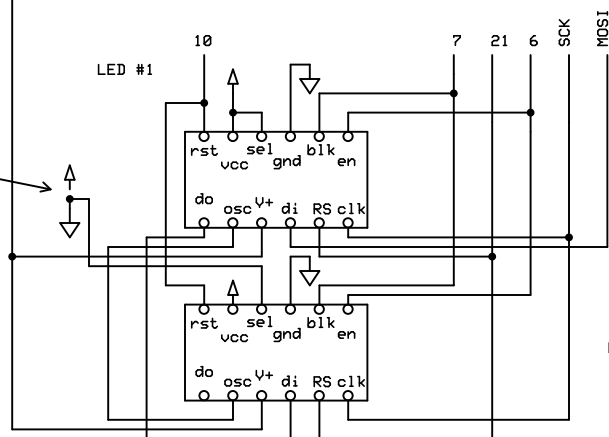

HCMS2901

LED #2 is optional



WWVB Clock

Wayne Wright

Rev 1.0

4/23/2025

Page # or name