


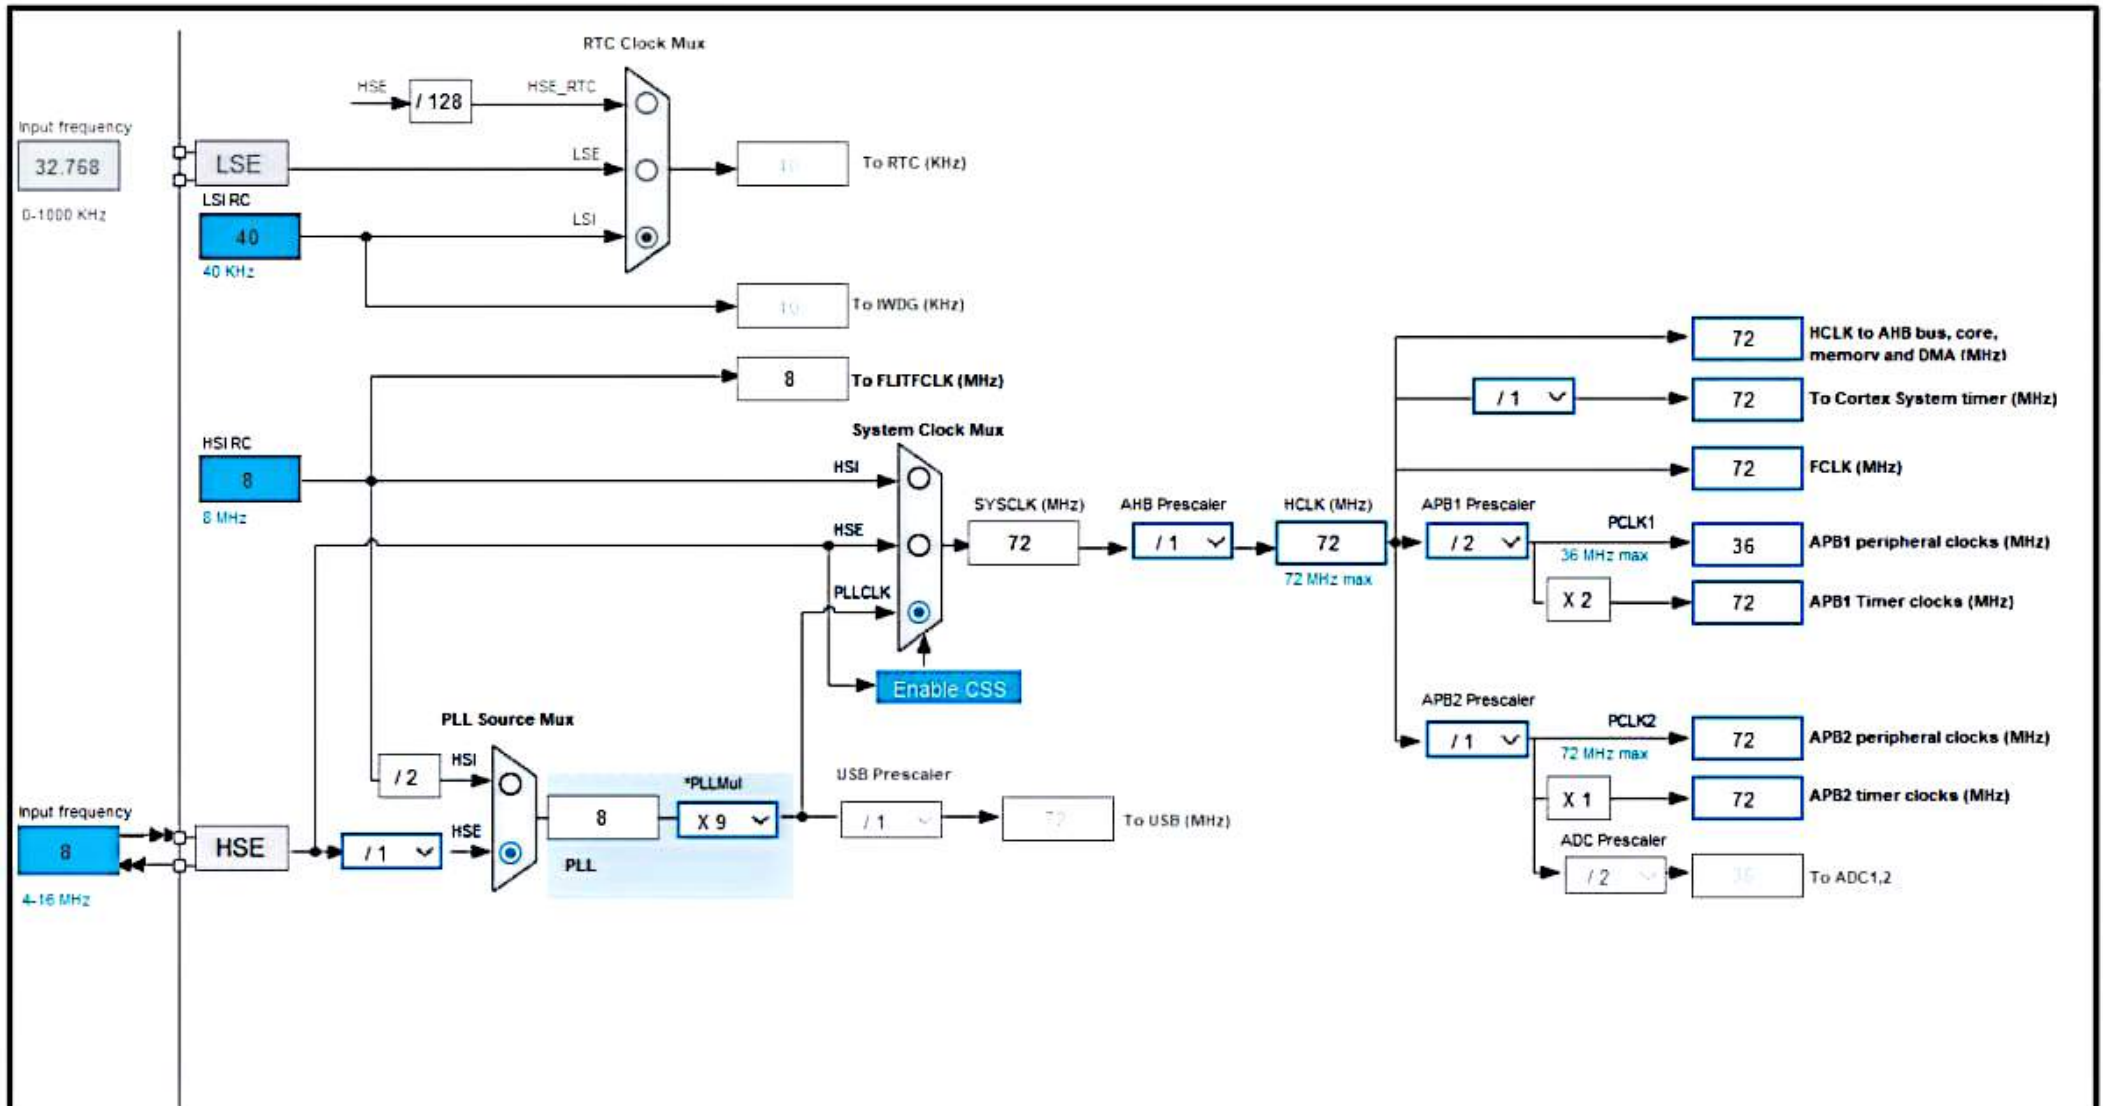

I2C1 Mode and Configuration

Mode

I2C

I2C



Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



✓ Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

✓ Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Modified
PA3	n/a	Low	Output Pu...	No pull-up ...	Low		☐
PA4	n/a	n/a	Input mode	Pull-up	n/a		☒
PA5	n/a	n/a	Input mode	Pull-up	n/a		☒
PA6	n/a	n/a	Input mode	Pull-up	n/a		☒

 Select Pins from table to configure them. **Multiple selection is Allowed.**

Mode

Slave Mode Disable 

Trigger Source Disable 

☒ Internal Clock

Channel1 Disable 

Channel2 Disable 

Channel3 Disable 

Channel4 Disable 

Combined Channels Disable 

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

 Parameter Settings

 User Constants

 NVIC Settings

 DMA Settings

Configure the below parameters :

Counter Settings

Prescaler (PSC - 16 bits value) 3599

Counter Mode Up

Counter Period (AutoReload Register - 9999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

