

YAKB A0 | NIZ EC + HHKB 6u + nicenano v2 | ENGINEERING PROTOTYPE


Physical pin numbers and named nets are authoritative. USB is an external passive data extension to U1.

U2/U3: only one INH low at a time. U4 gain 101. DRAIN goes through R32 to SENSE. Q1 gates U4 only.


SW1/SW2 are 2.54mm solder-hole harnesses. No external 5V connection to U1 BATTERY+.

























EC electrodes: logical row = physical row; column = floor(x_u + width_u/2). Including empty column bins.

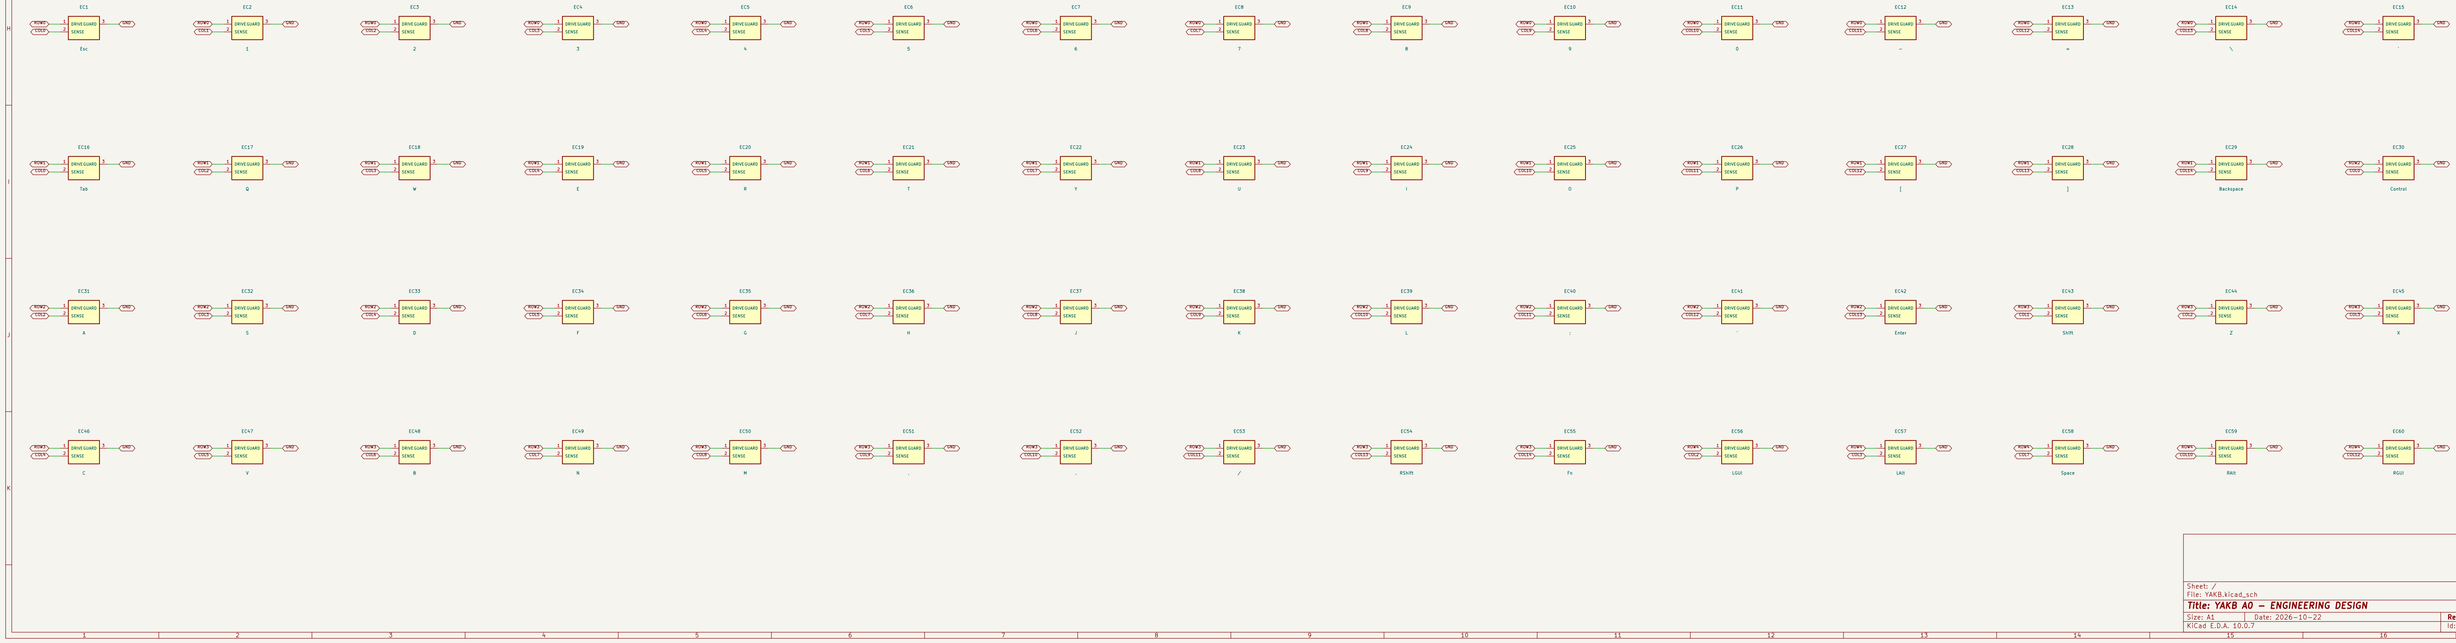

Sheet: /
File: YAKB.kicad_sch

Title: YAKB A0 — ENGINEERING DESIGN

Size: A1	Date: 2026-10-22	**Rev: A0 — NOT FOR FAB**
KiCad E.D.A. 10.0.7		Id: 1/1