
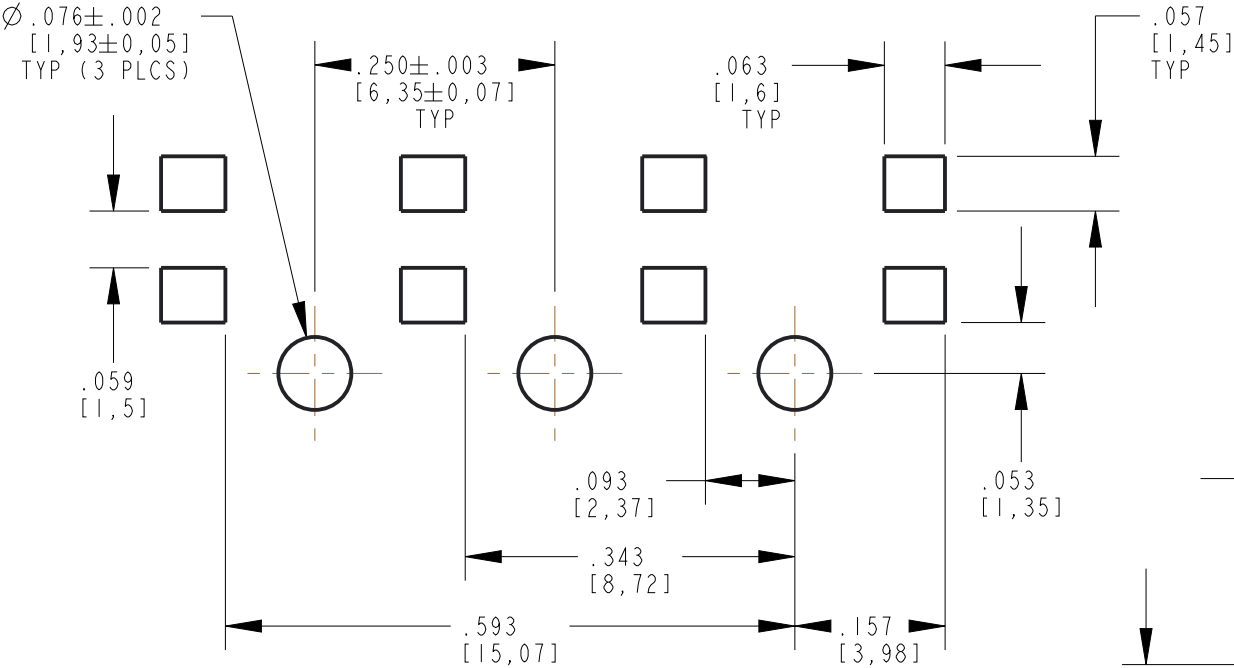



RoHS COMPLIANT 515-1048F

Part Numbers with the "F" suffix ending are RoHS Compliant.
Packaging is marked with "RoHS Compliant" label or equivalent markings.



REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	98378	NEW RELEASE	LD		CS	10-12-22
B	102982	ADDED PIN DETAIL & REVISED NOTE 2	LD		NO	5-16-23

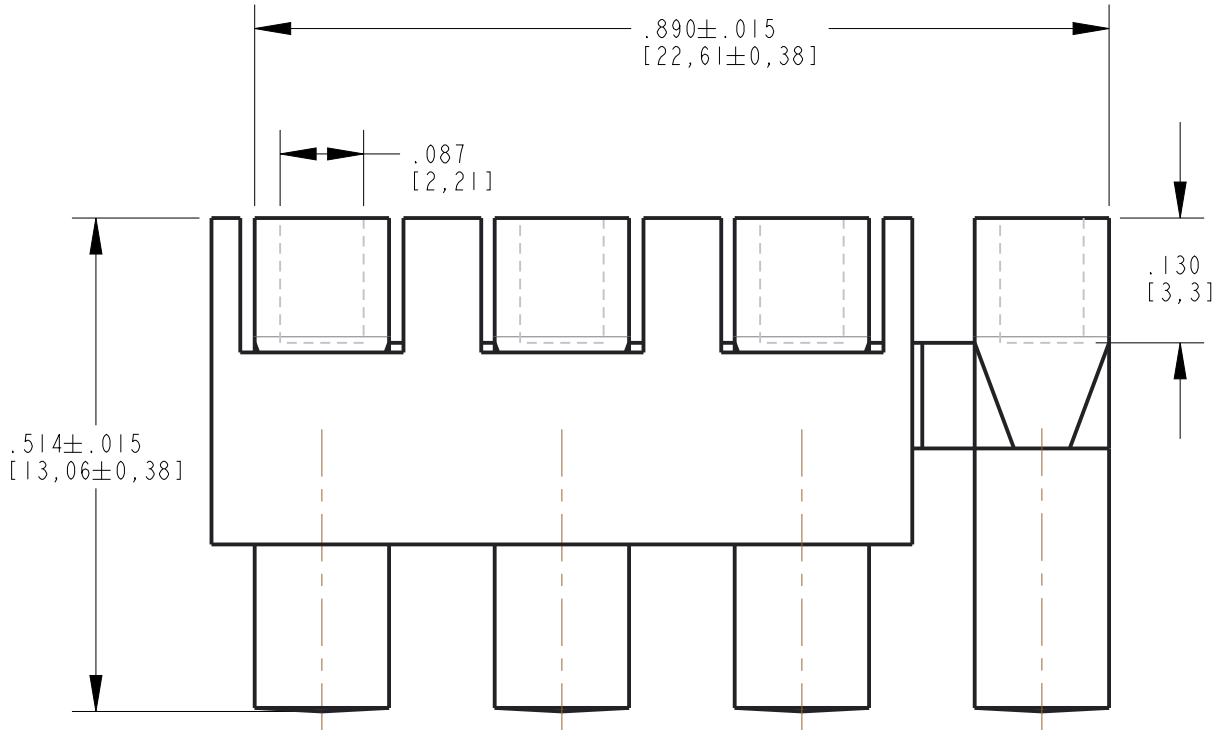

RECOMMENDED HOLE/SOLDER PAD LAYOUT

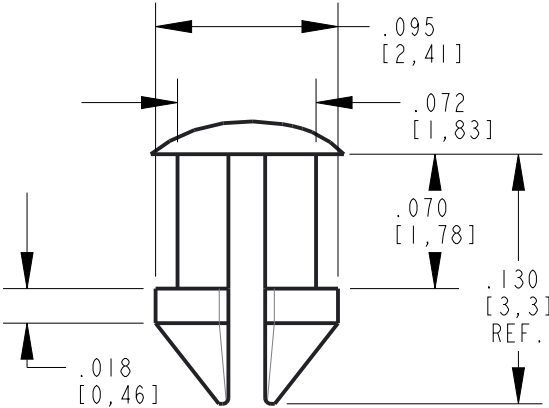

DETAIL A
SCALE 10.000

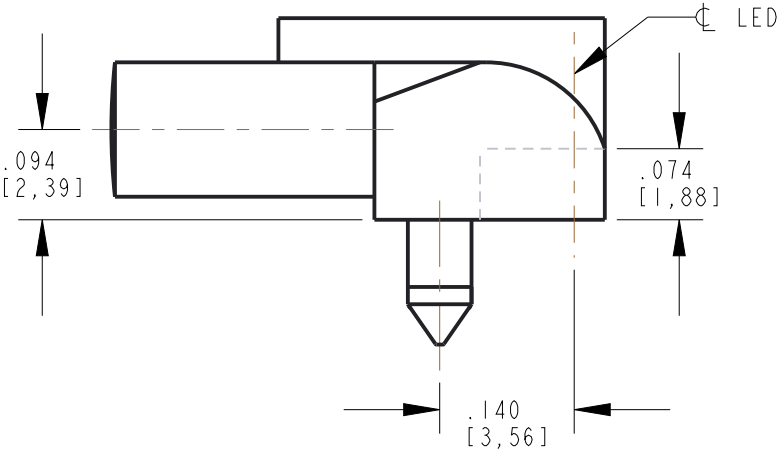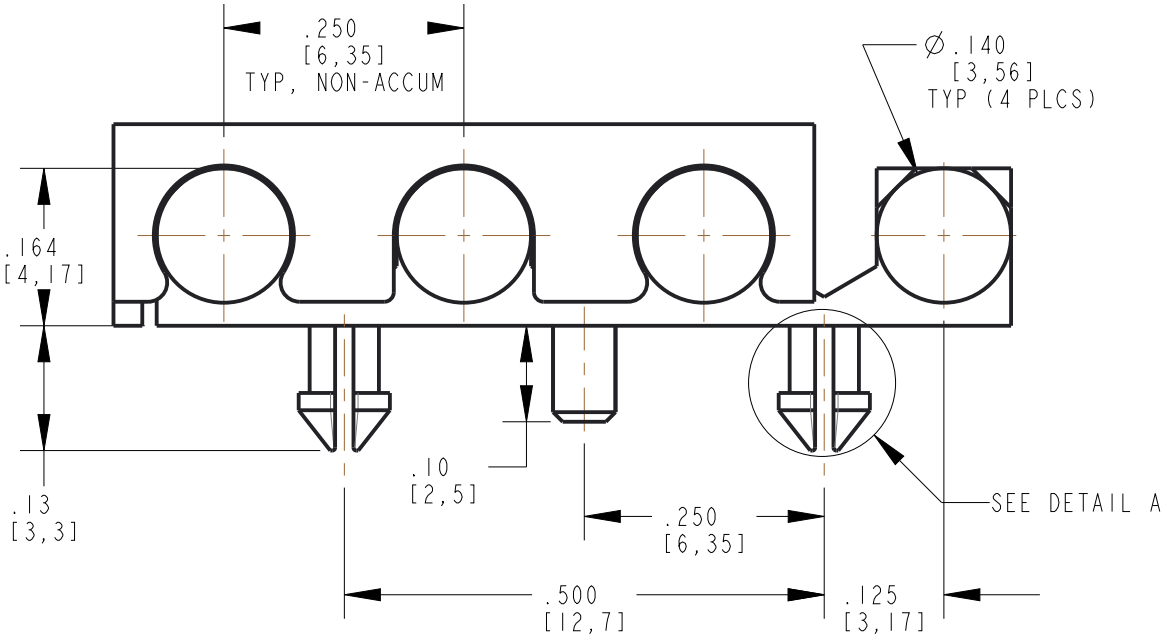

SCALE 3.000

NOTES:

1. LIGHT PIPE TO BE MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY).
LIGHT SHIELD TO BE MOLDED IN BLACK OPAQUE POLYBUTYLENE TEREPHTHALATE (UL 94V-0 FLAMMABILITY).
2. ECOMMENDED SURFACE MOUNT DIALIGHT LEDS:
599-04XX-127F (SINGLE COLOR)
3. COMPONENTS DESIGNED TO BE MOUNTED INTO P.C. BOARD.
4. OPERATING/STORAGE TEMPERATURE: -30°C TO +100°C
5. DIALIGHT PART NUMBER: 515-1048F

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 5.000	DRAWING NUMBER	REV
ALL DIM's: INCH (mm)		
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C-18634	B
FRACTIONS: $\pm 1/64$ DECIMALS (.XX): $\pm .01$ DECIMALS (.XXX): $\pm .005$		
ANGLES: $\pm 3^{\circ}$	TITLE	4 ELEMENT LIGHT PIPE
FINISH	MATERIAL	-
-	 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
FSCM 83330	SHEET 1 OF 1 FAMILY TABLE:	