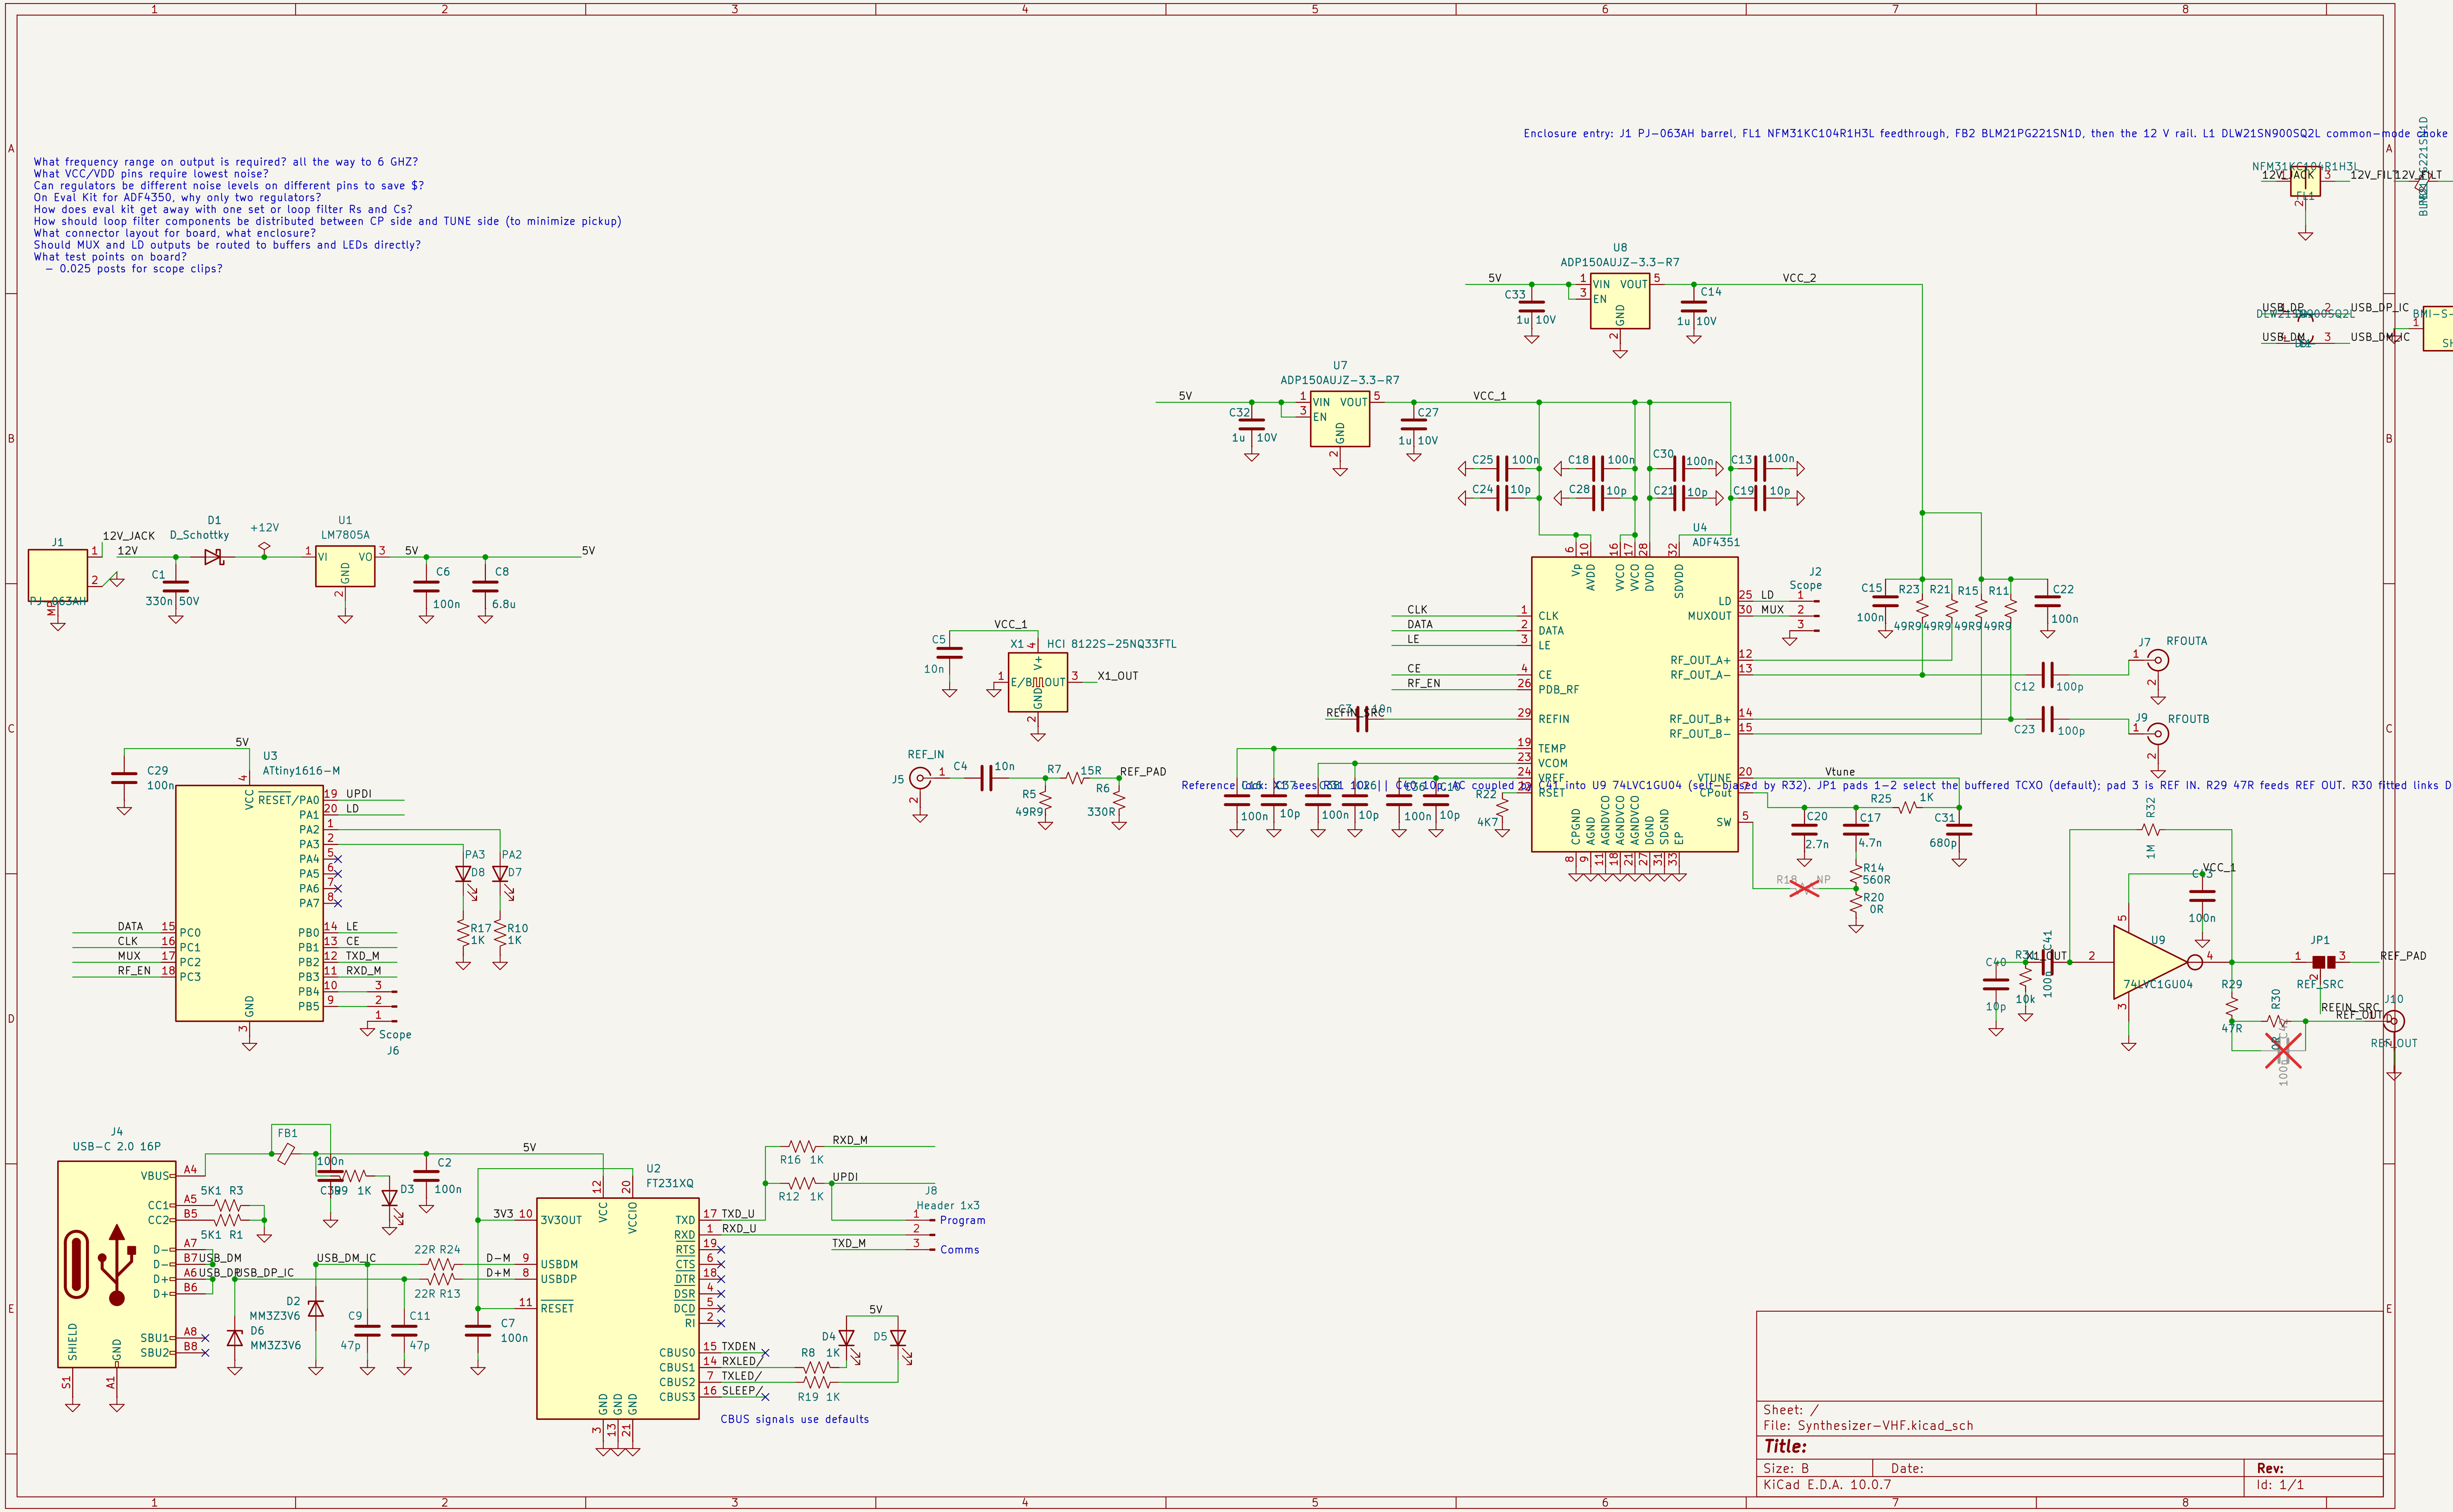

What frequency range on output is required? all the way to 6 GHZ?
What VCC/VDD pins require lowest noise?
Can regulators be different noise levels on different pins to save $?
On Eval Kit for ADF4350, why only two regulators?
How does eval kit get away with one set or loop filter Rs and Cs?
How should loop filter components be distributed between CP side and TUNE side (to minimize pickup)
What connector layout for board, what enclosure?
Should MUX and LD outputs be routed to buffers and LEDs directly?
What test points on board?
  – 0.025 posts for scope clips?

Enclosure entry: J1 PJ-063AH barrel, FL1 NFM31KC104R1H3L feedthrough, FB2 BLM21PG221SN1D, then the 12 V rail. L1 DLW21SN900SQ2L common-mode choke

Reference clock: X1 sees R31 10k || C40 10p, AC coupled by C41 into U9 74LVC1GU04 (self-biased by R32). JP1 pads 1–2 select the buffered TCXO (default); pad 3 is REF IN. R29 47R feeds REF OUT. R30 fitted links D

Sheet: /
File: Synthesizer-VHF.kicad_sch
Title:
Size: B
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 1/1