深圳市晶科鑫实业有限公司

样品承认书


客户代码：		
物料名称：	温度补偿晶体振荡器TCXO	
规格型号：	SMD2520 4pin 25.000MHz 3.3V ±1ppm -30~85℃	
P N/ SJK：	7W25000I33XFA	
环保属性：	■RoHS ■REACH ■HF □PAHS □其它	
版 次：	A1 2025-7-29 初版	最小包装： 3000pcs/real
湿敏等级：	一级	

承 认 签 章					
供 应 商 承 认			（ ）公 司 承		
制定	审 核	核 准	工 程 师	审 核	批 准
贺丹斌	李相同	刘惠光			
SJK 支持			盖章签署		
FAE_EMAIL			日 期		
日 期			批示： □接受 □有条件接受		
备注:					

ELECTRICAL SPECIFICATIONS

Parmeters		Condition	Electrical Specifications			
			MIN	TYP	MAX	UNITS
Nominal Frequency				25.000		MHZ
Operating Temperature Rangequency			-30		85	℃
Supply Voltage			3.135	3.3	3.465	V
Current Drain					2.0	MA
Output Level			0.8			Vp-p
Output Type				Clipped sine wave		
Output Load		Resistance		10		kΩ
		Capacitance		10		pF
Frequency Tolerance		After 2times reflow			±1.5	ppm
Frequency Stability	vs:Temperature	-30 ~ 85 ℃			±1.0	ppm
	vs:Load	10kΩ/10pF ±10%			±0.2	ppm
	vs:Supply Voltage	V_{DD}±5%			±0.2	ppm
Storage Temperature			-40		85	℃
Start-up Time					2.0	ms
Aging					±1.0	ppm/1year
Phase noise at 1KHz offset					-130	dBc/Hz


DIMENSION（Unit：mm）

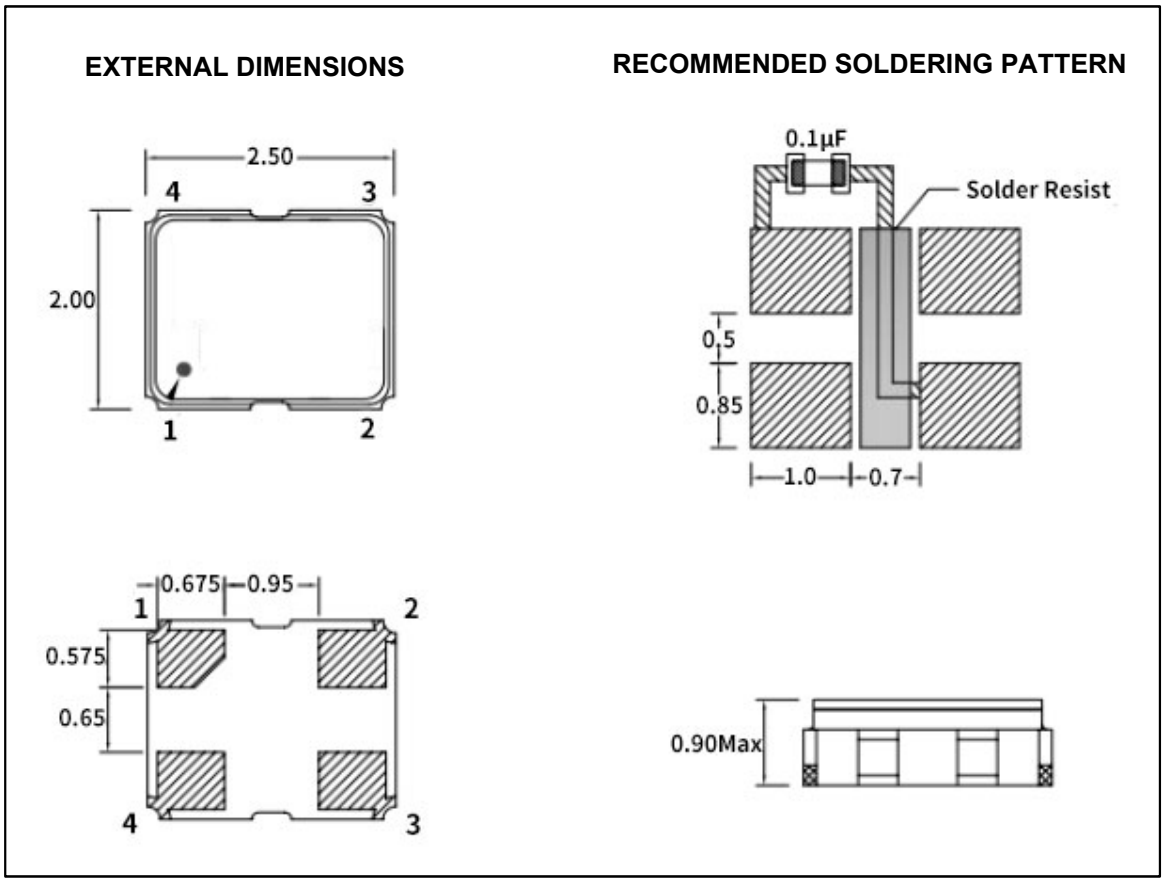


PIN CONNECTION

P/N	Function
1	Ground Recommended
2	Ground
3	Output
4	Vcc

MEASUREMENT CIRCUIT

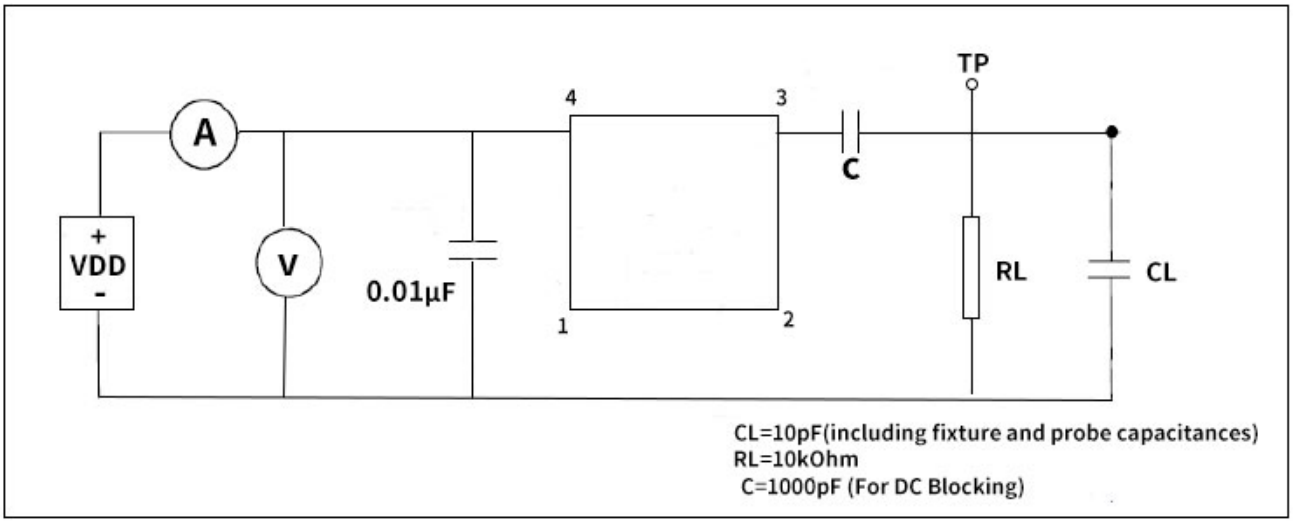


REFLOW CONDITION

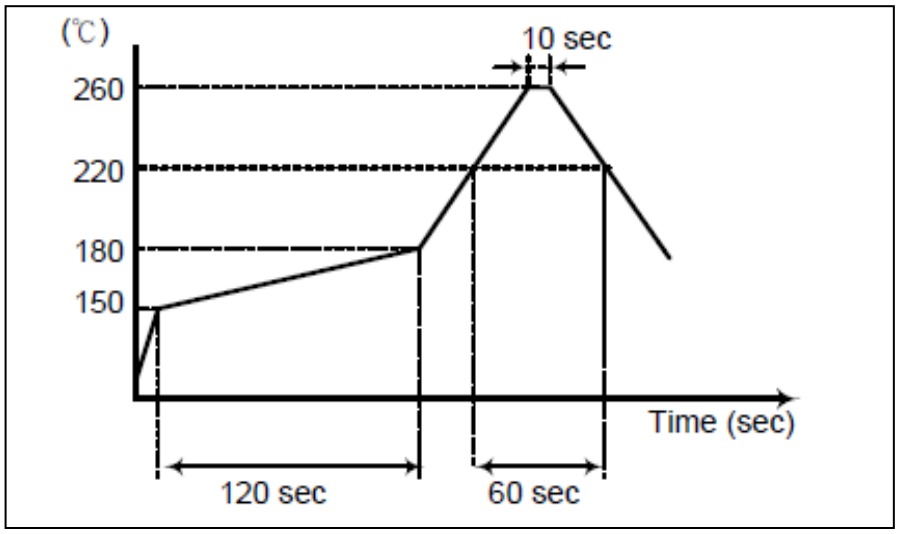


The reflow temperature profile may vary depending on the product model, specifications and frequency range.Refer to the individual product specifications for details

CARRIER TYPE

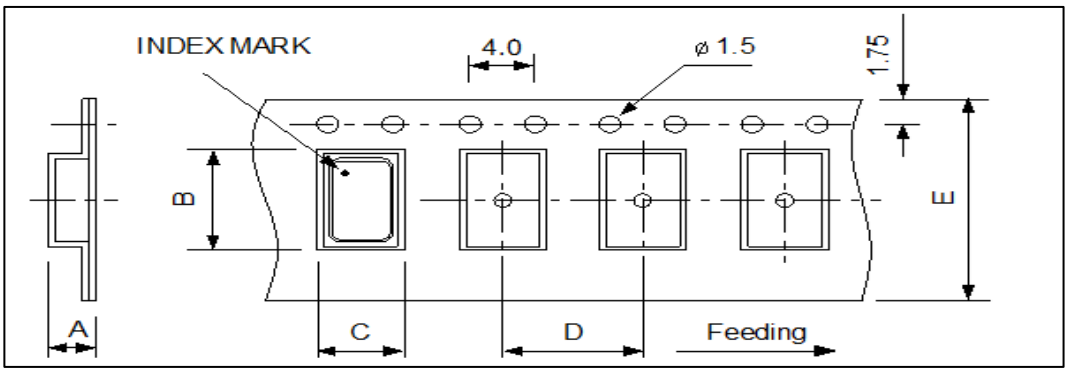

REEL

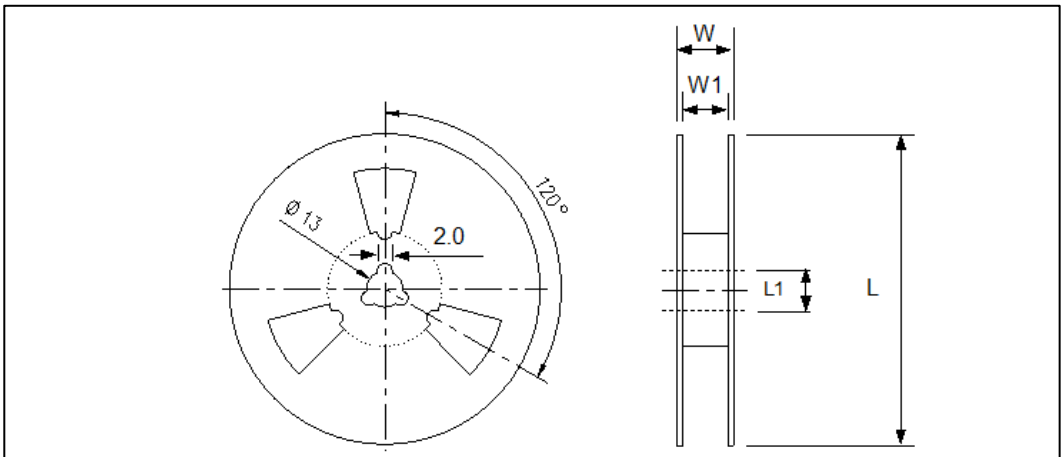

		A	B	C	D	E	L	L1	W	W1	pcs / Reel
DIMENSIONS	7050	2.15	7.9	5.4	8	16	180	13	21.5	17.5	1K
	6035	1.4	6.4	3.9	8	12	180	13	15.4	13	1K
	5032	1.46	5.5	3.6	8	12	180	13	15.4	13	1K
	3225	1.4	3.4	2.7	4	8	180	13	11.5	8	3K
	2520	1.15	2.8	2.25	4	8	180	13	10.5	8	3K
	2016	0.95	2.25	2.25	4	8	180	13	10.5	9	3K
	1612	0.8	2.0	1.85	4	8	180	13	10.5	9	3K