Hang Crystal International


TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR
8853SA

TCXO UNIT WITH CLIPPED SINE WAVE OUTPUT IN SMD 5.0X3.2MM PACKAGE (STRATUM 3).

PRODUCT FEATURES

- Small dimensions 5.0x3.2x1.9 with 10 solder pads.
- Stratum 3 （Overall ±4.6ppm including 20 years aging）.
- RoHS compliant, LEAD-FREE, HALOGEN-FREE and REACH compliant.

PRODUCT PHOTO (NOT IN SCALE)

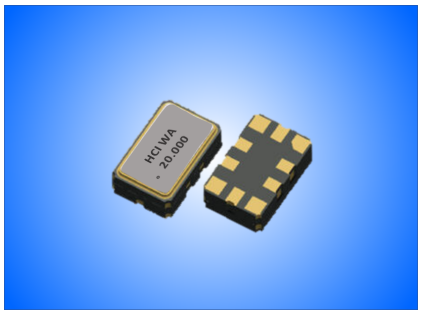

APPLICATIONS


- WiMAX / WLAN / Ethernet
- Telecommunication
- Mobil applications
- Base station

PRODUCT SPECIFICATIONS

PARAMETER	SUPPLY VOLTAGE 3.3V	REMARKS
Frequency range	10 ~ 52MHz	--
Frequency tolerance	±1.0ppm	Initial tol. @+25°C
Frequency stability	±0.05ppm~±0.28ppm	See note below table
Operating temperature range	-20 to +70°C / -30 to +85°C / -40 to +85°C	In combination to above stabilities.
Aging per year	±1.0ppm	@+25°C
Frequency stab.(Overall,20 years aging)	±4.6ppm	
Output waveform	CLIPPED SINE WAVE	--
Output voltage level	0.8V_{pp}	Minimum
Symmetry (duty cycle)	45~55%	@ 50%V_{CC}
Phase noise (example 10MHz)	-120dBc/Hz / -140dBc/Hz / -148dBc/Hz	@100Hz / 1kHz / 10kHz
Phase jitter RMS	<1ps	12kHz≤Fj≤20MHz
Supply current	6mA	@15pF

Note: Frequency stability is the frequency deviation over temperature range in reference to +25°C

PACKAGE OUTLINE / DIMENSIONS

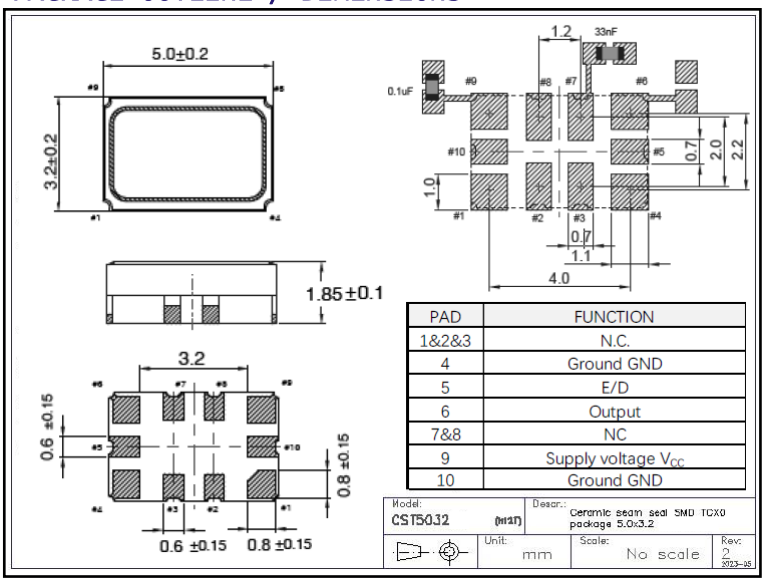

PAD	FUNCTION
1&2&3	N.C.
4	Ground GND
5	E/D
6	Output
7&8	NC
9	Supply voltage V_{CC}
10	Ground GND

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 16mm.
- Component pitch in carrier 8mm.
- Reel diameter 180mm.
- QTY per reel: 1,000pcs

RECOMMENDED REFLOW PROFILE

