FRONT PANEL

Hammond 1455N1601 end plate 103.00 x 53.00 x 1.50 mm, VIEWED FROM OUTSIDE. Datum = lower-left corner. Scale 1:1 on A4 (print at 100 %).

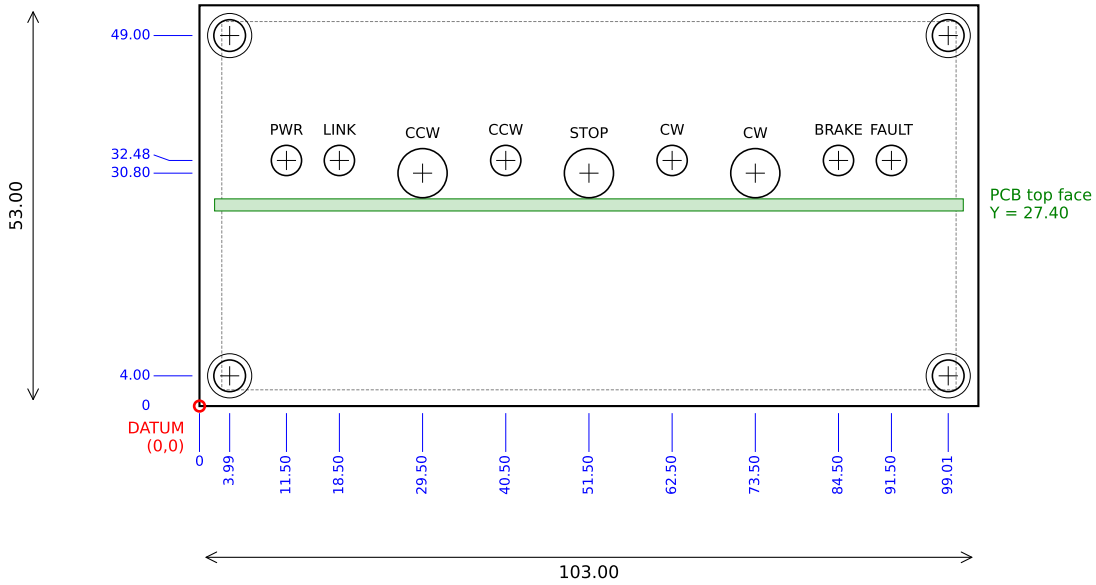

ID	Feature	X	Y	Size	Part / note
M	Plate screw	3.99	4.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	3.99	49.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	99.01	4.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	99.01	49.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
1	CCW	29.50	30.80	Ø6.5	NKK BB15AH-FA button (cap 5.1) [V height]
2	STOP	51.50	30.80	Ø6.5	NKK BB15AH-FA button (red cap BB15AH-FC) [V height]
3	CW	73.50	30.80	Ø6.5	NKK BB15AH-FA button (cap 5.1) [V height]
4	PWR	11.50	32.48	Ø4.0	Dialight 551-0207F (green) [LED function TBD]
5	LINK	18.50	32.48	Ø4.0	Dialight 551-0307F (yellow) [LED function TBD]
6	CCW	40.50	32.48	Ø4.0	Dialight 551-0307F (yellow) [LED function TBD]
7	CW	62.50	32.48	Ø4.0	Dialight 551-0307F (yellow) [LED function TBD]
8	BRAKE	84.50	32.48	Ø4.0	Dialight 551-0407F (red) [LED function TBD]
9	FAULT	91.50	32.48	Ø4.0	Dialight 551-0407F (red) [LED function TBD]

Positions are hole CENTRES (rectangles: centre of opening). Vertical positions follow the PCB in slot 6 of 11, board top face at Y = 27.40 (panel centre +0.90).

Vertical stack tolerance about ±0.6 mm (extrusion 49.62 ±0.56, slot position scaled from Hammond drawing): check one PCB in the box before drilling a batch.

Sources: Hammond 1455N1601 drawing; NKK Series BB (BB15AH-FA CL 3.4 mm); Dialight C-17306 551-xx07F (CL 5.08 mm); Pulse J403.K mech A; LCSC C2988369. See README.md.

50 mm print-scale check