REAR PANEL

Hammond 1455N1601 end plate 103.00 x 53.00 x 1.50 mm, VIEWED FROM OUTSIDE. Datum = lower-left corner. Scale 1:1 on A4 (print at 100 %).

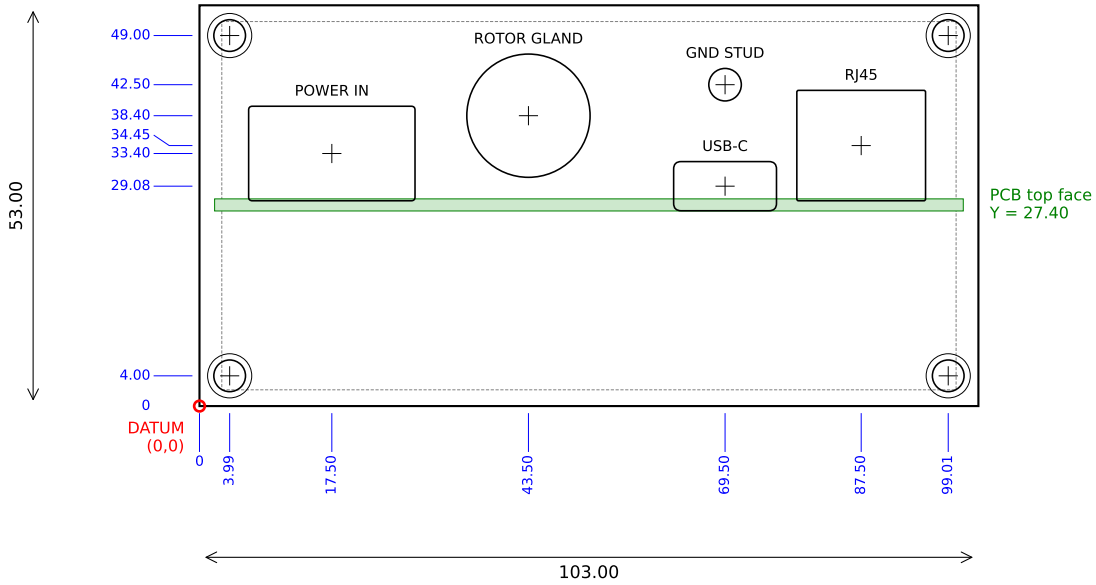

ID	Feature	X	Y	Size	Part / note
M	Plate screw	3.99	4.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	3.99	49.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	99.01	4.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
M	Plate screw	99.01	49.00	Ø4.19 csk Ø5.84x82°	Hammond, existing (do not drill)
1	POWER IN	17.50	33.40	22.00 x 12.50 R0.50	TBD: assumed 4-pos 5.08 mm pluggable terminal block, 13.8 VDC + 26 VAC [TBD]
2	ROTOR GLAND	43.50	38.40	Ø16.3	TBD: M16x1.5 nylon cable gland (cable 5-10 mm), nut AF19 flats horizontal; pigtail to CPC 206708-1 plug [TBD]
3	USB-C	69.50	29.08	13.60 x 6.50 R1.00	GT-USB-7010ASV (isolated, ADuM3160); opening clears plug overmold [V height, E opening]
4	GND STUD	69.50	42.50	Ø4.3	TBD: M4 stud/screw + 2 nuts + ring lug (chassis bond) [TBD]
5	RJ45	87.50	34.45	17.02 x 14.60 R0.25	Pulse J0011D01BNL MagJack (Pulse recommended cutout) [V]

Positions are hole CENTRES (rectangles: centre of opening). Vertical positions follow the PCB in slot 6 of 11, board top face at Y = 27.40 (panel centre +0.90).

Vertical stack tolerance about ±0.6 mm (extrusion 49.62 ±0.56, slot position scaled from Hammond drawing): check one PCB in the box before drilling a batch.

Sources: Hammond 1455N1601 drawing; NKK Series BB (BB15AH-FA CL 3.4 mm); Dialight C-17306 551-xx07F (CL 5.08 mm); Pulse J403.K mech A; LCSC C2988369. See README.md.

50 mm print-scale check