



OVEN FINGERS RESOURCE GUIDE

Use this optional tool to determine the correct oven finger configuration for your store's oven make and model. This guide is interactive - click on the Make of your oven to begin.

**Middleby
Marshall**

XLT

Lincoln

EDGE

Version: August 2026

NOTICE FOR FRANCHISEES AND THEIR EMPLOYEES: Franchisees and their employees may use these materials, or not, at their discretion. These materials are provided for general informational purposes only and do not, and are not intended to, constitute legal advice. Compliance with any and all information provided in these materials is not a guarantee that accidents or losses will not occur or that franchisees will be in compliance with applicable legal requirements. Franchisees should consult their own legal counsel concerning their particular facts and circumstances and any specific legal questions they may have regarding the issues addressed in these materials. As independent business owners, franchisees remain solely responsible for the operation of their stores, including, without limitation, all employment practices and policies, all safety and security issues, and all other workplace issues. The persons who work in stores owned and operated by franchisees are employees of the franchisee, and not employees of Domino's Pizza LLC or its affiliated entities. By providing these materials, Domino's Pizza LLC and its affiliated entities do not assume any responsibilities or duties of franchisees or their employees.

Middleby Marshall

Oven Finger Arrangement:

[Main Page](#)

PS200

PS350/360

PS360

PS360G WOW

PS555Q

PS360Q

PS520

PS570

PS360Q Tandem

PS536

PS570Q

PS360EWB

PS540

PS670Q

PS360WB

PS540G

PS670G WOW

PS360WB70

PS555

PS640G WOW

XLT

[Main Page](#)

Oven Finger Arrangement:

1832 TS

1832-W

2440 TS-D

2440-W

3240 D

3240 S

3240 H

3255 D

3255 F

3255 G

^{L-R}
3255 H

^{R-L}
3255 H

3255 S

3265 H

3270 A

3270 D

3270 E 1B

3270 E 2B

3270 F

3270 G

3270-S

3855 A

3855 D

3855 G

3855 H

3855 S

3870 G

3870 H

3870 TS2

4455 H

EDGE

[Main Page](#)

Oven Finger Arrangement:

3240

3260S

3270

4460S

LINCOLN

Oven Finger Arrangement:





[Main Page](#)

ALL MODELS

MIDDLEBY MARSHALL PS200

PS200 LEFT-TO-RIGHT CONVEYOR for Domino's Pizza


Refer to Operation Standards for
correct time and temperature settings

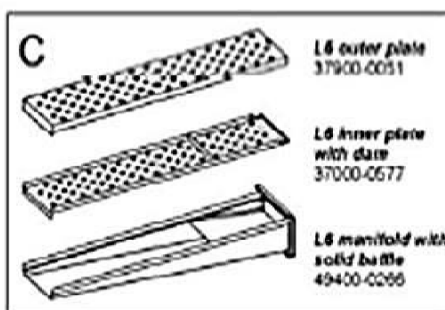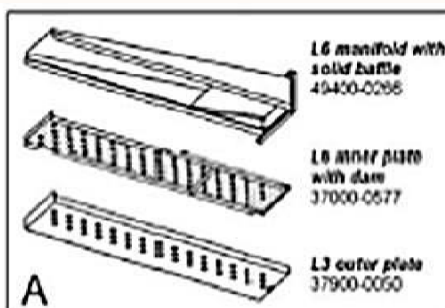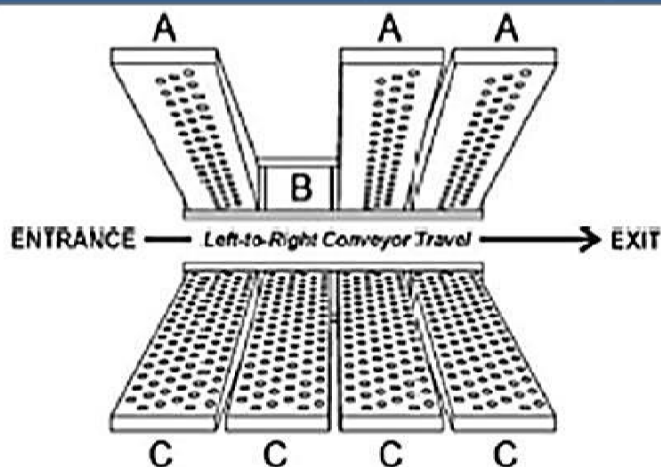

**Middleby
Marshall**
 Finger Arrangement
 P/N 30154, Rev D, 3/10/00
 24-Hour Service Hotline
 1-800-236-8444

PS200 RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

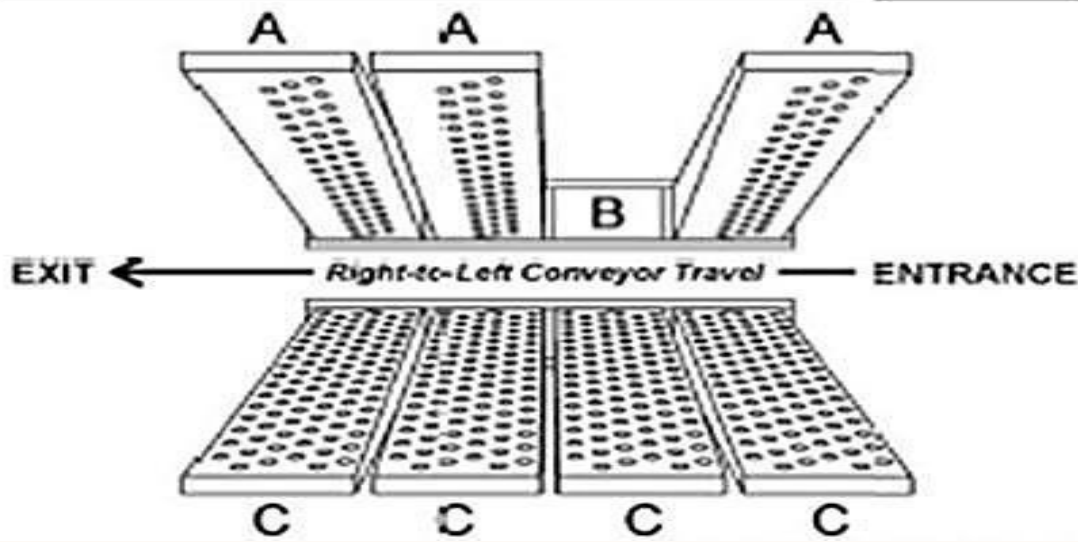





MIDDLEBY MARSHALL PS350/360

Refer to Operation Standards for
correct time and temperature settings



PS350/360 LEFT-TO-RIGHT CONVEYOR for Domino's Pizza

For RIGHT-TO-LEFT CONVEYORS, attach the Right-to-Left Diagram Overlay Label over the diagram below.

Oven Time: 6:30 - 7:00 Temperature: 480 - 510*

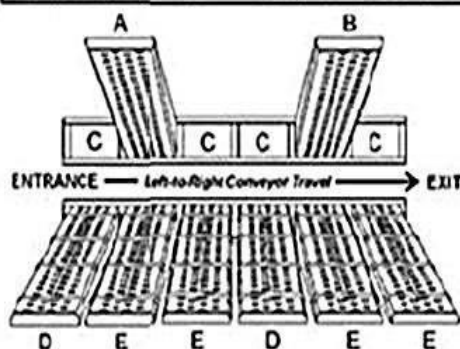


IMPORTANT: Components marked ★ are no longer available from Middleby.



Middleby
Marshall
24 Hour Service Hotline
1.800.238.8444

PS350/360 RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

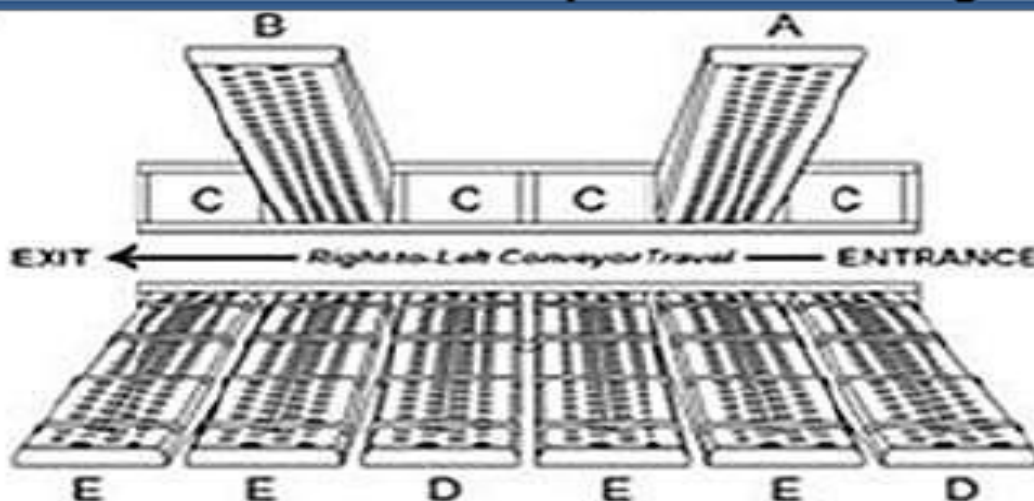




MIDDLEBY MARSHALL PS360

Refer to Operation Standards for
correct time and temperature settings

PS360 LEFT-TO-RIGHT CONVEYOR for Domino's Pizza


For RIGHT-TO-LEFT CONVEYORS, attach the Right-to-Left Diagram Overlay Label over the diagram below. The label is inside the envelope in the oven's window.

Oven Time: 6:30 - 7:00 Temperature: 480 - 510°

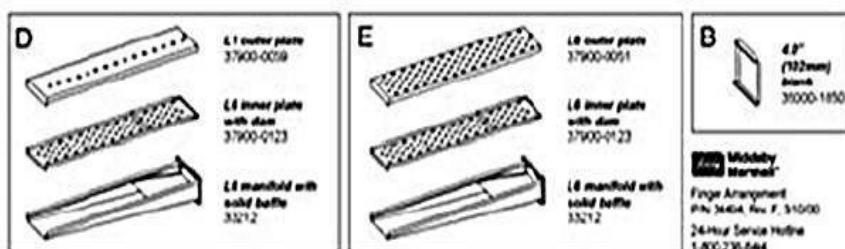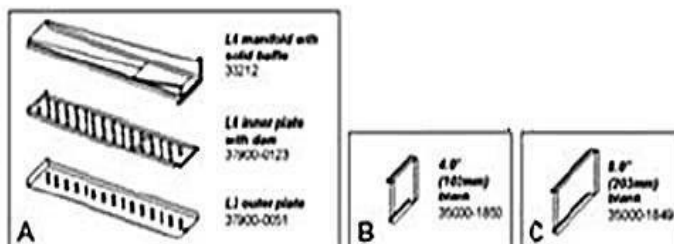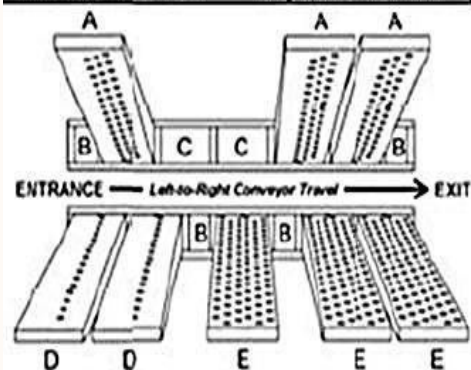

PS360 RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

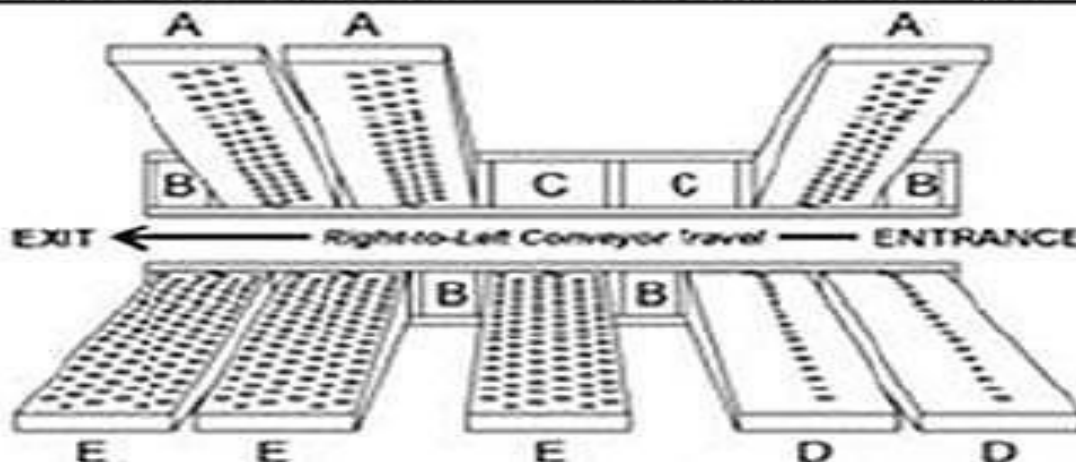







MIDDLEBY MARSHALL PS360Q

Refer to Operation Standards for
correct time and temperature settings

PS360Q LEFT-TO-RIGHT CONVEYOR for Domino's Pizza

For RIGHT-TO-LEFT CONVEYORS, attach the Right-to-Left Diagram Overlay Label
over the diagram below.


Oven Time: 6:30 - 7:00 Temperature: 480 - 510°

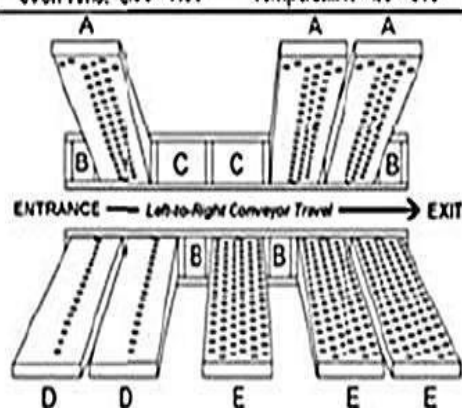

Middleby Marshall
Finger Arrangement
PIN 40211-0017, Rev. J, 3/22/00
24 Hour Service Hotline
1-800-238-5444


PS360Q RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

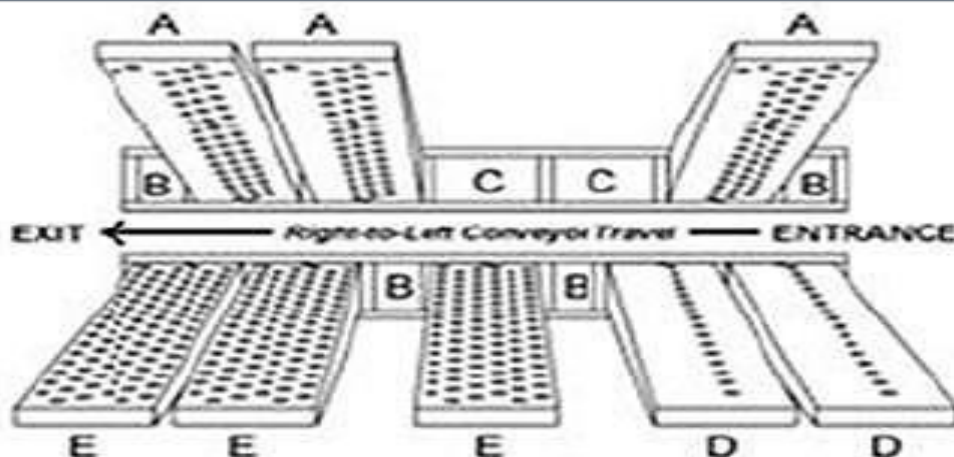

MIDDLEBY MARSHALL PS360Q TANDEM

E	B	D	D	B	B	E							
---	---	---	---	---	---	---	--	--	--	--	--	--	--



C	C	E	A	E	A	A							
---	---	---	---	---	---	---	--	--	--	--	--	--	--

Notes

RT TO LT MIRROR IMAGE TO FINGER ARRANGEMENT

TIME: 6:00MIN TO 6:30MIN
TEMP: 480°F TO 510°F

A = 37900-0051 PLATE, OUTER S/L6
35000-1366 PLATE, INNER/COL ALUZ
42400-0648 ASSY, MANIFOLD W/FULL BAFFLE ALUZ

B = 36773 WLDMT, PLATE OUTER "Q"/L3A
35000-1366 PLATE, INNER/COL ALUZ
42400-0648 ASSY, MANIFOLD W/FULL BAFFLE ALUZ

C = 37900-0059 WLDMT, PLATE OUTER "S"/L1
35000-1366 PLATE, INNER/COL ALUZ
42400-0648 ASSY, MANIFOLD W/FULL BAFFLE ALUZ

D = 35531-0004 PLATE, FULL BLANK ALUZ

E = 35000-1369 PLATE, HALF BLANK

F =

G =

J	3/22/2000	37900-0051 WAS WLDMT ECN 000081A	AJ
H	9/12/1997	VOID REV G	MM
G	9/11/1997	ALL INNER PLATES WERE 35000-1366 ECN 97563	MM
F	9/6/1997	"C" OTR PLT WAS 357900-0059 ECN 97552	MM
E	8/7/1997	POS A OTR PLT WAS 35000-1365; POS B OTR PLT WAS	MM
E	8/7/1997	35200-0007 ECN 97493	MM
D	6/21/1997	POS C OTR PLATE WAS 35000-1699 ECN 97388	MM
C	3/28/1996	CORRECTED FNGR DESC ECN 96113	MM
B	1/22/1996	PRODUCTION RELEASE	MM
Rev	Date	Description	By

Description

CONFIG, FINGER PS360Q + 2 DOM

P/N

48021-0007

Rev


J



MIDDLEBY MARSHALL PS360EWB


PS360EWB *RIGHT-TO-LEFT CONVEYOR* for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

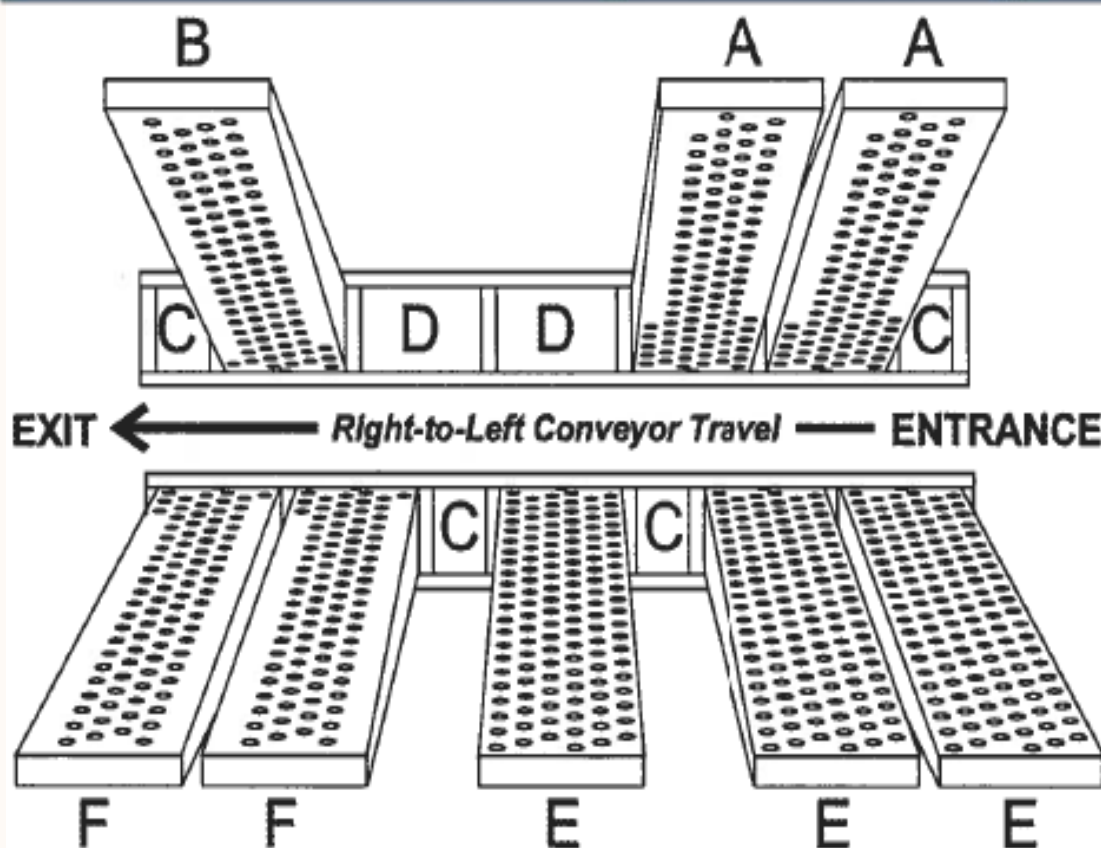

MIDDLEBY MARSHALL PS360WB

D	A	C	C	A	A	D						
---	---	---	---	---	---	---	--	--	--	--	--	--



B	B	D	B	D	B	B						
---	---	---	---	---	---	---	--	--	--	--	--	--

Notes

RT TO LT MIRROR IMAGE OF FINGER ARRANGEMENT

BAFFLE GAPS:

UPR - 1"

LWR - 3/8"

TIME & TEMP:

6:00-6:30 MIN @ 470-480° F

- A = 37200-0044 WLDMNT, PLATE OUTER "S" /L3
 35000-1875 PLATE, INNER/COL ALUZ
 42400-0646 ASSY, MANIFOLD W/RESTRICT AIR FL BAF AZ
- B = 37200-0043 WLDMT, PLATE OUTER "S"/L6
 35000-1875 PLATE, INNER/COL ALUZ
 42400-0647 ASSY, MANIFOLD W/FULL PERF BAFFLE ALUZ
- C = 35531-0004 PLATE, FULL BLANK ALUZ

D = 35000-1369 PLATE, HALF BLANK ALUZ

E =

F =

G =

E	1/15/1998	ADDED BAF GAPS & TIME & TEMP ECN 980028	MM
D	7/16/1996	CORRECTED L TO R CONFIG ECN 96319	MM
C	4/3/1996	CORRECTED FNGR DESC ECN 96113	MM
B	1/22/1996	PRODUCTION RELEASE	MM
Rev	Date	Description	By

Description

CONFIG, FINGER PS360WB DOM

P/N


34145

Rev

E

**Middleby
Marshall**
CONVEYORS OF EXCELLENCE

MIDDLEBY MARSHALL PS360WB70

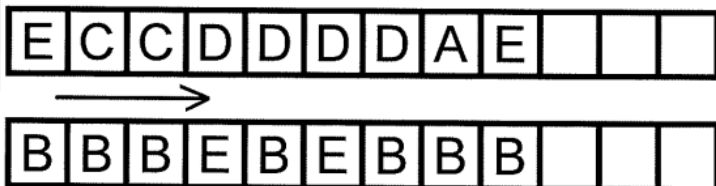

Notes

RT TO LT MIRROR IMAGE OF FINGER ARRANGEMENT

BAFFLE GAPS:

UPR - 1-3/4"

LWR - 3/4"

TIME & TEMP:

5 MIN 40 SEC @ 500° F

A = 37200-0044 WLDMT, PLATE OUTER "S" /L3
31963 WLDMT, PLATE INNER W/DAM ALUZ
32304 ASSY, MANIFOLD W/FULL BAFFLE ALUZ

B = 37200-0043 WLDMT, PLATE OUTER "S" /L6
31963 WLDMT, PLATE INNER W/DAM ALUZ
32304 ASSY, MANIFOLD W/FULL BAFFLE ALUZ

C = 37200-0043 WLDMT, PLATE OUTER "S" /L6
35000-1875 PLATE, INNER/COL ALUZ
42400-0646 ASSY, MANIFOLD W/RESTRICT AIR FL BAF AZ

D = 35531-0004 PLATE, FULL BLANK ALUZ

E = 35000-1369 PLATE, HALF BLANK ALUZ

F =

G =

Description

CONFIG, FINGERS PS360WB70 DOM

P/N

34126

Rev

G

**Middleby
Marshall**
CONVEYORS OF EXCELLENCE

Rev	Date	Description	By
G	1/13/1998	ADDED BAF GAPS, TIME & TEMP ECN 980016	MM
F	7/7/1997	EXTEND FIELDS ECN 97388A	DH
E	6/21/1997	POS A INR PLT WAS 35000-1875; POS B INR WAS	MM
E	6/21/1997	35000-1875 ECN 97388	MM
D	4/10/1997	CHG POS "C"	MM
C	5/10/1996	CLARIFIED FINGER DESCRIPTIONS ECN 96206	MM
B	1/18/1996	PRODUCTION RELEASE	MM

MIDDLEBY MARSHALL PS360G WOW

Notes

RT TO LT: TOP FINGERS MIRROR IMAGE OF LT - RT
DIRECTION
AVG CONTROL T/C'S: 3 & 4
TOP = 70HZ BOTTOM = 85HZ

- A =** 69882 PLATE, OUTER L8 W/102HOLES 3.5"
69883 PLATE, INNER/COL L8 W/103H
69656 WLDMT, MANF L8 PRF BAF UPR 3.5
- B =** 69440 PLATE, OUTER L8 3.5"
69884 PLATE, INNER/COL L8 W/96H
69656 WLDMT, MANF L8 PRF BAF UPR 3.5
- C =** 69885 PLATE, OUTER L8 W/109H 3.5"
69886 PLATE, INNER/COL L8 W/95H
69656 WLDMT, MANF L8 PRF BAF UPR 3.5
- D =** 69887 PLATE, OUTER L8 W/105HOLES 3.5"
69888 PLATE, INNER/NONCOL L8 W/16B H
69656 WLDMT, MANF L8 PRF BAF UPR 3.5
- E =** 69436 PLATE, OUTER L8
69437 PLATE, INNER/COL L8
69661 WLDMT, MANF L8 PERF BAFFLE

$$F =$$
 $G =$

C	12/17/2013	REM TIME & TEMP, REM DOMINO'S FROM DESC ECN 013192	AJ
B	9/4/2013	RELEASE TO PRODUCTION ECN 013134	AJ
Rev	Date	Description	By

Description

CNFG,FNGR PS360G WOW2

P/N

69889

Rev

C



MIDDLEBY MARSHALL PS520

REVISIONS						
REV.	REV DATE	ECN	REVISION DESCRIPTION	BY	CHK	CHK DATE
E	03/22/2011	011082	CHG'D DESC 51986 TO SOLID NOT PRTL	AJ	WSS	03/22/2011

A C B [] [] [] [] [] [] [] [] [] []

ENTRANCE → CONVEYOR TRAVEL → EXIT

B B B [] [] [] [] [] [] [] [] [] []

NOTES:

A= 51357 PLATE,OTR L5GN W/1 ROW PS520
 51027 PLATE,INR L5GN COL/ALUZ PS520
 51986 WLDMT,MANF L5GN SOLID BFL 520
 B= 51356 PLATE,OTR L5GN W/2 ROWS PS520
 51027 PLATE,INR L5GN COL/ALUZ PS520
 51986 WLDMT,MANF L5GN SOLID BFL 520
 C= 50682 PLATE,BLANK FULL PS520

D=

E=

F=

G=

H=

I=

J=

K=

MATERIAL		GAUGE:		TOLERANCE UNLESS SPECIFIED ANGLES: $\pm 1.0^\circ$ DEC: ± 0.030 XXX ± 0.15 XXX ± 0.05	 THE MIDDLEBY CORPORATION 1400 Toastmaster Drive Elgin, Illinois 60120 847-741-3300
FINISH					
DRAWN AJ 3/22/2004	CHECKED	APPROVED WSS 3/22/2004			
CONFIG,FINGER PS520/S1820 STD					
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING			PART NO 51988	SHT 1 OF 2	REV E

RT TO LT IS MIRROR IMAGE OF ABOVE
FAN RPM = 2440
BAKE TIME & TEMP = 6'00 @ 475 ° F

- A =** 44825 PLATE, OUTER L4
42679 PLATE, INNER COL ALUZ
42676 ASSY, MANIFOLD W/PERF BAFFLE
- B =** 42673 PLATE, OUTER L6
42679 PLATE, INNER COL ALUZ
42676 ASSY, MANIFOLD W/PERF BAFFLE
- C =** 75353 PLATE, BLANK FULL

G =

D	5/7/2019	75535 PLT,BLNK FULLWAS 43030 PLT,BLNK SS ECN019045			AJ
C	4/10/2012	NO CHG TO FNGR ONLY LBL GRAPHICS UPDATE ECN 012072			AJ
B	2/6/2001	RELEASE TO PRODUCTION ECN 001075			AJ
Rev	Date	Description			By

Description
 CONFIG,FNGR PS536 DOMINO'S

P/N
 45346

Rev
 D

 **Middleby[®]
 Marshall**
 CONVEYORS OF EXCELLENCE



MIDDLEBY MARSHALL PS540

E A B C E

ENTRANCE → CONVEYOR TRAVEL → EXIT

D D D D

NOTES:

RT TO LT IS MIRROR IMAGE OF ABOVE FINGER CONFIG.
CONTROL T/C AVERAGING FROM ENTRANCE & EXIT SIDES

HERTZ 60 50
FAN RPM 2050 2040
KIT RPM P/N 51077 P/N 51079

BAKE TIME & TEMP
GAS: 6'00 @ 450-465°F
ELEC: 6'00 @ 510°F

REVISIONS

REV.	REV DATE	ECN	REVISION DESCRIPTION	BY	CHK	CHK DATE
B	07/01/2014	014127	RELEASE TO PRODUCTION	AJ	WSS	07/01/2014
C	09/22/2025	025104	REISSUE PART NUMBER	MM	WSS	09/22/2025

A= 51020 PLATE, OUTER L67 PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
B= 51021 PLATE, OUTER L65 PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
C= 51022 PLATE, OUTER L65F PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
D= 50551 PLATE, OUTER L6 GN PS540
50553 PLATE, INR/COL L6 GN ALUZ PS540
50227 WLDMT, MANF L6GN PERF BAF PS540
E= 70782 PLATE, 1/2 BLANK ALUZ

F=

G=

H=

I=

J=

K=

MATERIAL		GAUGE:	TOLERANCE UNLESS SPECIFIED ANGLES $\pm 1.0^\circ$ DEC .X ± 0.030 .XXX ± 0.015 XXXX ± 0.005		THIS DRAWING IS CONFIDENTIAL AND PROPERTY OF  THE MIDDLEBY CORPORATION 1400 Toastmaster Drive Elgin, Illinois 60120 847-741-3300	
FINISH						
DRAWN	CHECKED	APPROVED				
MM 7/1/2014		WSS 7/1/2014				
CONFIG,FNGR PS540 DOMINO'S						
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING			PART NO	70784	SHT 1 OF 2	REV C

MIDDLEBY MARSHALL PS540G

REVISIONS						
REV.	REV DATE	ECN	REVISION DESCRIPTION	BY	CHK	CHK DATE
D	04/09/2012	012070	NO CHG TO FINGER, LBL GRAPHICS UPDATE	AJ	WSS	04/09/2012

A E B C

ENTRANCE → CONVEYOR TRAVEL → EXIT

D D D D

NOTES:

RT TO LT IS MIRROR IMAGE OF ABOVE FINGER CONFIG
CONTROL T/C AVERAGING FROM ENTRANCE & EXIT SIDES

HERTZ 60 50
FAN RPM 2050 2040
KIT P/N 51077 51079

BAKE TIME & TEMP

GAS: 6:00 MINUTES @ 450° - 465°F

ELEC: 6:00 MINUTES @ 510°F

A= 51020 PLATE, OUTER L67 PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
B= 51021 PLATE, OUTER L65 PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
C= 51022 PLATE, OUTER L65F PS540
50550 PLATE, INR/COL L6 ALUZ PS540
42410-0199 WLDMT, MANF W/PERF BAFF ALUZ
D= 50551 PLATE, OUTER L6 GN PS540
50553 PLATE, INR/COL L6 GN ALUZ PS540
50227 WLDMT, MANF L6GN PERF BAF PS540
E= 35210-0536 PLATE, FULL BLANK ALUZ

F=

G=

H=


I=

J=

K=

MATERIAL		GAUGE:		TOLERANCE UNLESS SPECIFIED ANGLES .X ± 1.0° DEC .X ± .030 .XX ± .015 .XXX ± .005		 THE MIDDLEBY CORPORATION 1400 Toastmaster Drive Elgin, Illinois 60120 847-741-3300	
FINISH							
DRAWN AJ 6/13/2003		CHECKED		APPROVED WSS 6/13/2003			
CONFIG,FNGR PS540 DOMINO'S							
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING				PART NO 51045		SHT 1 OF 2 REV D	

MIDDLEBY MARSHALL PS555Q

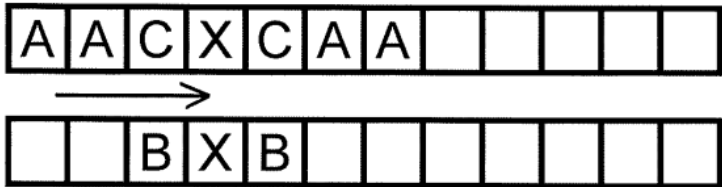

Notes

RT TO LT IS MIRROR IMAGE OF ABOVE
470 ° F @ 5'30"
BELT NO: BX58 P/N 44963,PULLEY NO: BK62 P/N 39910
FAN RPM = 1580 @ 60HZ
BELT NO: BX58 P/N44963,PULLEY NO: BK65 P/N 47267
FAN RPM = 1597 @ 50HZ
AVG T/C @ 3 LOCATIONS
ENTRANCE: SUPPLY OUTER & INNER
EXIT: SUPPLY INNER

- A = 45084 WLDMT,OTR PLT W/RETAINER S/L4
35000-1366 PLATE,INNER/COL ALUZ
45083 ASSY,RAISED MANF W/PERF BAFFLE ALUZ
- B = 41800 WLDMT,PLT OTR L20 W/16 ROWS555
39323 PLATE,INNER/COL ALUZ L20
41442 ASSY,MANIF W/PERF BAFF ALUZ
- C = 35512 PLATE,BLNK HALF 4.13 UPR 570

D =

E =

F =

G =

Description	
CONFIG,FNGR PS555 Q	
P/N	Rev
45088	D



Rev	Date	Description	By
D	6/6/2002	BELT WAS 48461 BX65 FOR 1597 RPM	AJ
C	3/20/2002	ADDED 50HZ INFO TO NOTES ECN 002129	AJ
B	12/5/2000	RELEASE TO PRODUCTION ECN 000692	AJ

MIDDLEBY MARSHALL PS570




Refer to Operation Standards for
correct time and temperature settings

PS570 (or PSS70S) LEFT-TO-RIGHT CONVEYOR for Domino's Pizza

For RIGHT-TO-LEFT CONVEYORS attach the Right-to-Left Diagram Overlay Label over the diagram below

Oven Time: 6:00 - 6:30


Temperature: 460 - 470°

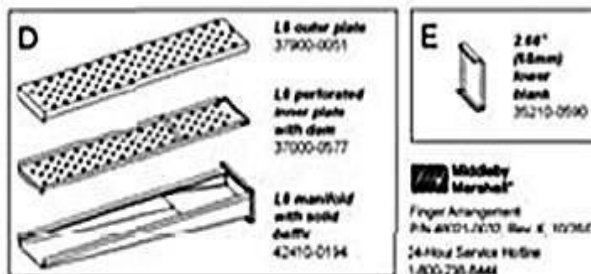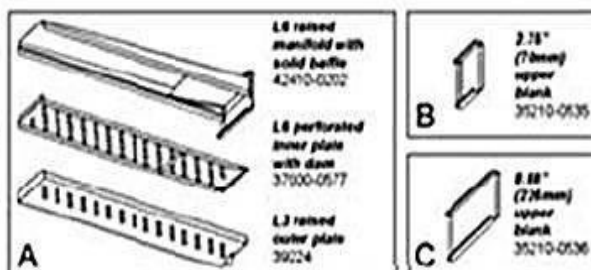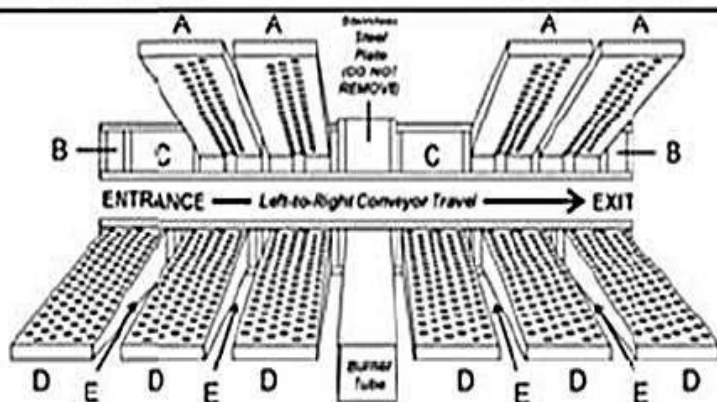

Middleby Marshall
Finger Arrangement
P/N 400152070 Rev. K, 10/2015
24-Hour Service Hotline
1-800-235-5444

PS570 (or PSS70S) RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

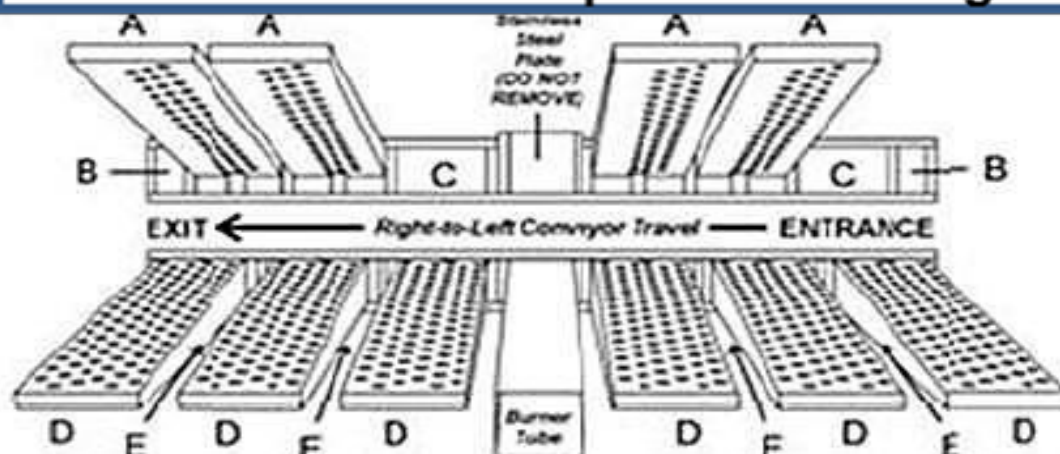




MIDDLEBY MARSHALL PS570Q

Refer to Operation Standards for
correct time and temperature settings

PS570Q with **energy management system** LEFT-TO-RIGHT CONVEYOR
for Domino's Pizza


For RIGHT-TO-LEFT CONVEYORS, attach the Right-to-Left Diagram Overlay Label over the diagram below.

Oven Time: 6:00 - 6:30 Temperature: 460 - 470°

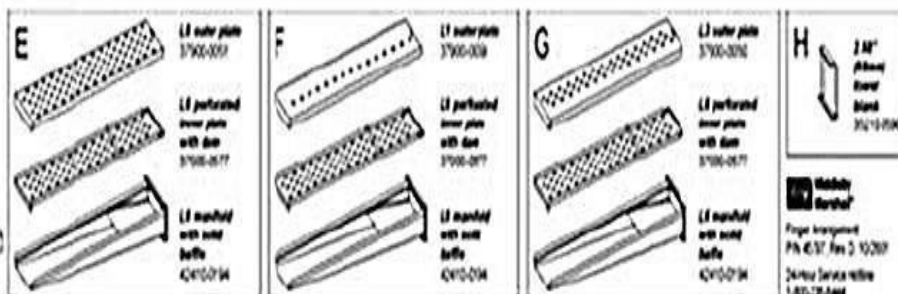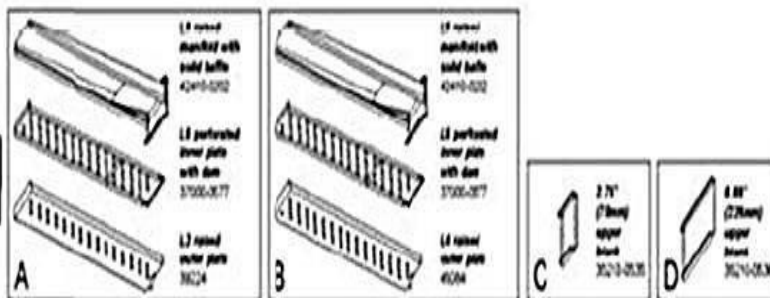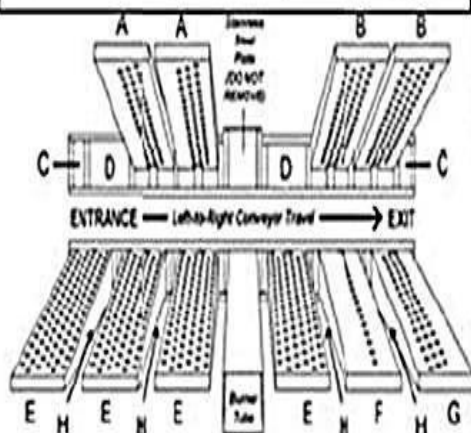

PS570Q with **energy management system** RIGHT-TO-LEFT CONVEYOR
for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

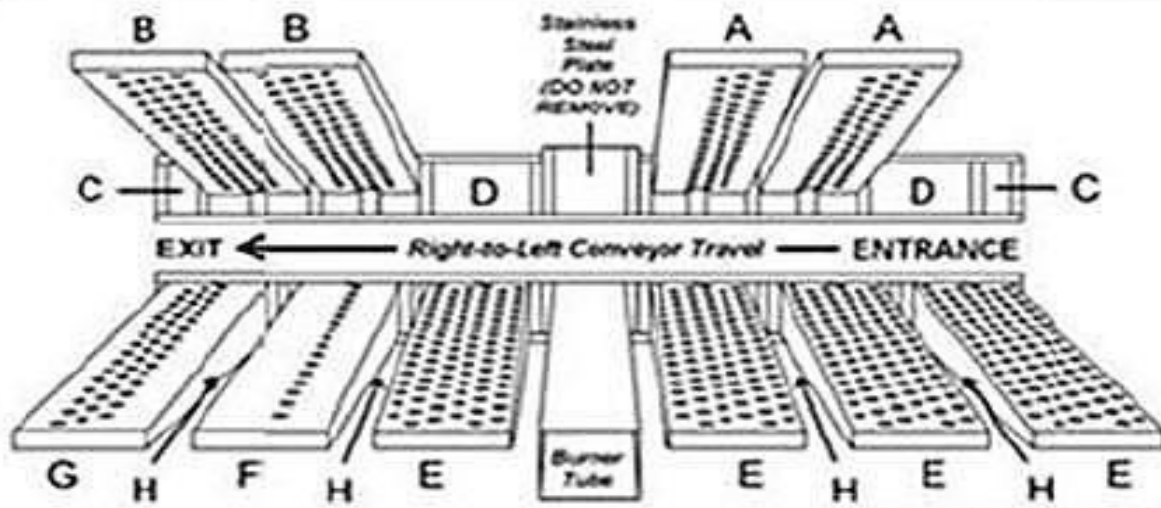




MIDDLEBY MARSHALL PS555

Refer to Operation Standards for
correct time and temperature settings

PS555 with *energy management* system LEFT-TO-RIGHT CONVEYOR for Domino's Pizza

For RIGHT-TO-LEFT CONVEYORS, attach the Right-to-Left Diagram Overlay Label over the diagram below.


Oven Time: 6:00 - 6:30 Temperature: 460 - 470°

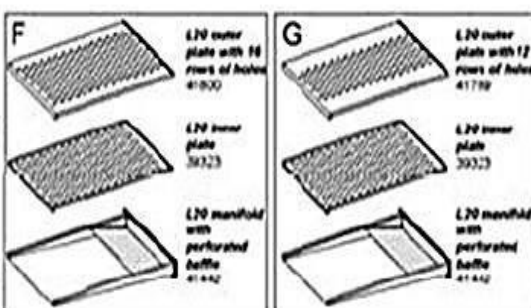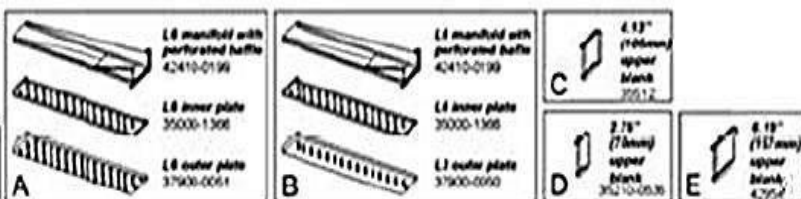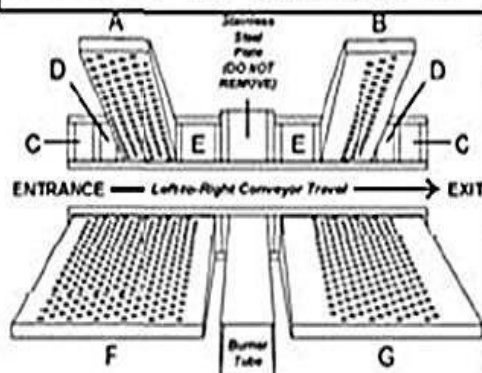

Middleby Marshall
Frige Arrangement
P/N 42519, Rev C, 9/27/01
24 Hour Service Hotline
1-800-228-8444

PS555 with *energy management* system RIGHT-TO-LEFT CONVEYOR for Domino's Pizza

Refer to Operation Standards for
correct time and temperature settings

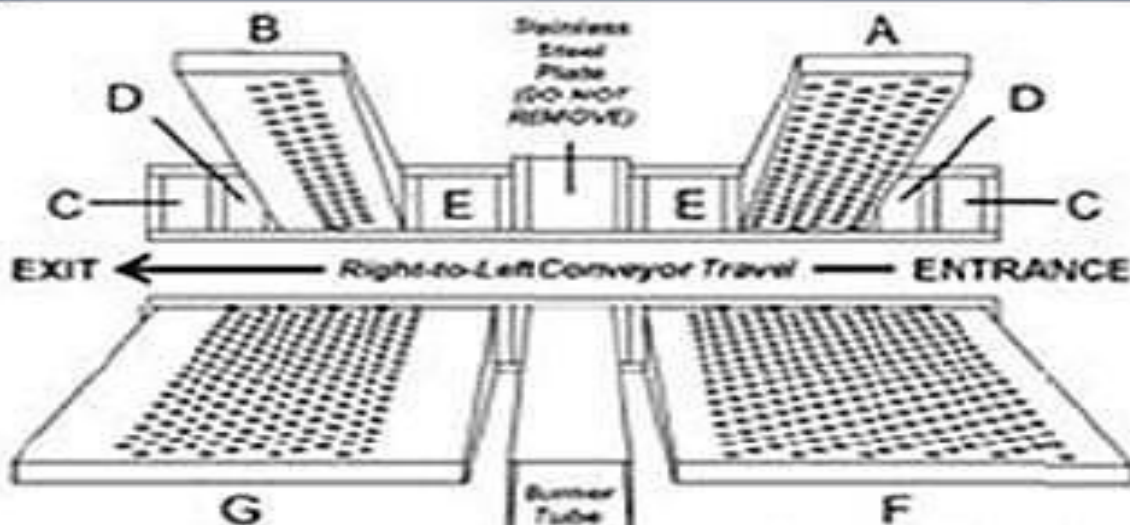


MIDDLEBY MARSHALL PS640G WOW

Middleby Marshall® PS640G DOMINO'S

Right-to-Left configuration is shown.

For Right-to-Left Conveyors, attach this label over the diagram on the oven.
Avg Control T/CS: Bottom Entrance and Exit

Refer to Operation Standards for
correct time and temperature settings







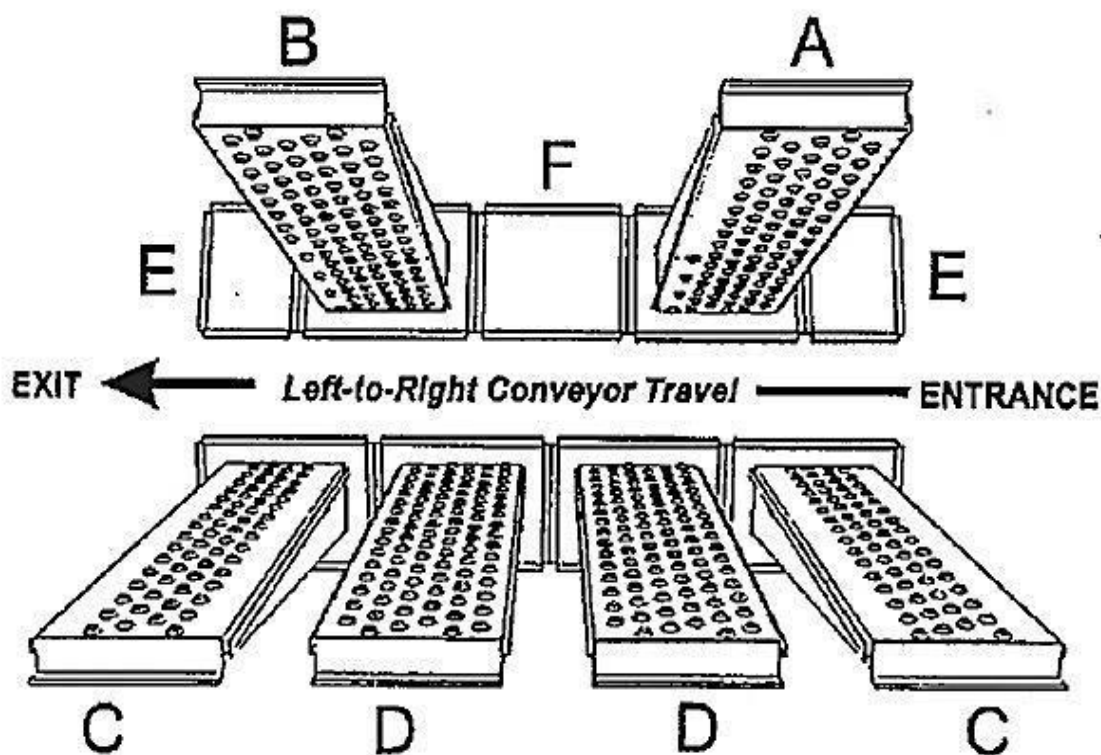


MIDDLEBY MARSHALL PS670G WOW

Middleby Marshall® PS670G DOMINO'S

Left-to-Right configuration is shown.

Refer to Operation Standards for correct time and temperature settings

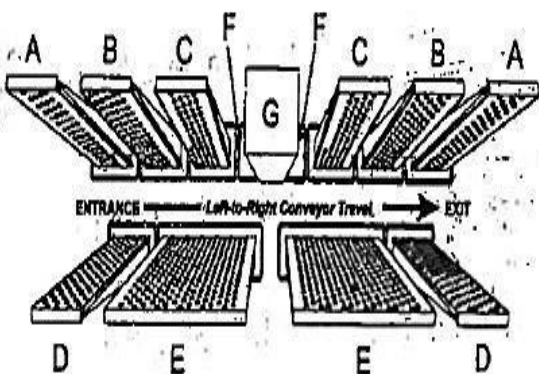

BOFI XLT 1832 – TS

Domino's

Finger Arrangement Placement

Inner Plate

Outer Plate

Perforated

6 Row



Refer to Operation Standards for
correct time and temperature settings

Block Off

Block Off

Perforated

6 Row



Conveyor Direction



Outer Plate

Inner Plate




6 Row

Perforated



6 Row

Perforated



6 Row

Perforated

BOFI XLT 2440 – TS-D

Refer to Operation Standards for correct time and temperature settings

Domino's Pizza LLC

Finger Arrangement Placement

Inner Plate

Block Off

Perforated

Perforated

Block Off

Outer Plate

Block Off

680W

6 Rows

Block Off

Conveyor Direction

Outer Plate

6. Power

6.80mV

6.804

6 Row

Inner Plate

Received

Dedicated

Referred


Radicals

BOFI XLT 3240 – TS-D

Domino's Pizza, LLC Finger Placement Chart

XLT-3240-TS-D


Refer to Operation Standards for
correct time and temperature settings

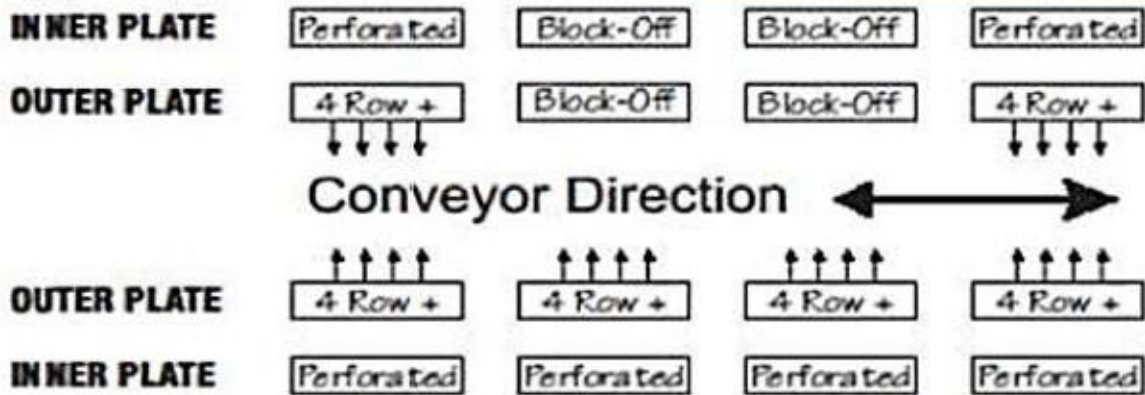

BOFI XLT 3240 H

Reference	Description	Date	By
AFC	Customer Approved	4/1/2024	MMB

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	4
2	XA-8001C-32-T	Finger Body 32xx Top No Ramp	3
3	XF-110	1/4"-14 Thd Fmg Screw	7
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8614E	Finger Inner Plate Perforated	1
6	XM-8004-8615E	Finger Inner Plate Perforated	1
7	XM-8004-8616E	Finger Inner Plate Perforated	2
8	XM-8004-8694F	Finger Inner Plate Perforated	2
9	XM-8010D-xx40-B	Finger Support Angle	1
10	XM-8010D-xx40-T	Finger Support Angle	1
11	XM-8024B-xx40	Return Air Plate	2
12	XM-8025B-3240-xx70	Endloss Plate	2
13	XM-8493E	32xx Finger Outer Plate	1
14	XM-8614E	32xx Finger Outer Plate	1
15	XM-8615E	32xx Finger Outer Plate	1
16	XM-8617E	32xx Finger Outer Plate	1
17	XM-8618E	32xx Finger Outer Plate	2
18	XM-8619E	32xx Finger Outer Plate	1

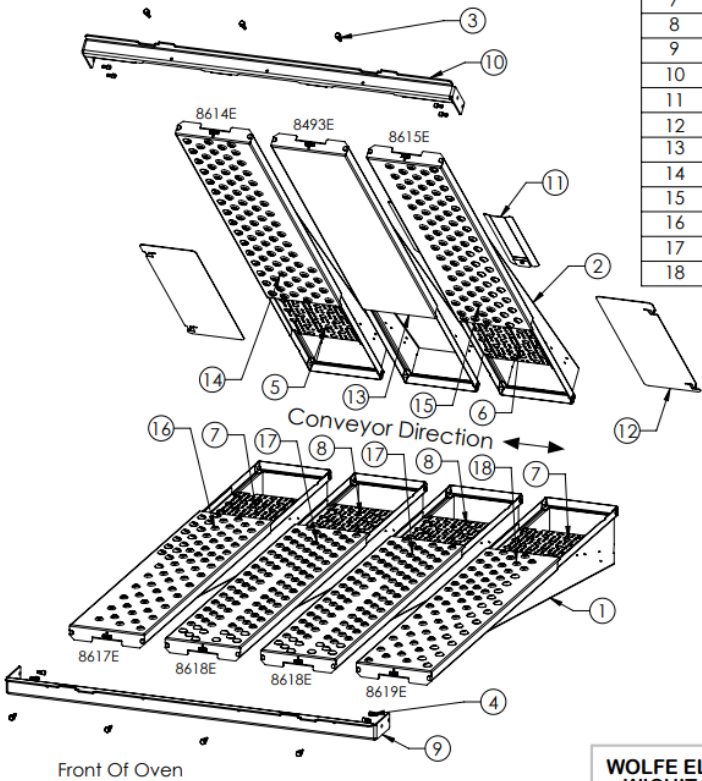

This Finger Chart is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz	X	3/28/2024	Jason Bobbitt
B17-6-2	SQ	50 Hz			
Legend: Fan Style: B17 = 152 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW=2					

Top

Back Of Oven

Bottom

Front Of Oven

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT

101.16

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY NOH DATE 1/6/2021

DESCRIPTION

XLT OVENS
Finger Chart Dominos

MAIL

See BOM

DWG

XA-8H3240-Domino


SHEET 1 OF 2
DO NOT SCALE

BOFI XLT 3255 D

Domino's Pizza, LLC Finger Placement Chart


XLT-3255-TS-D

Refer to Operation Standards for
correct time and temperature settings

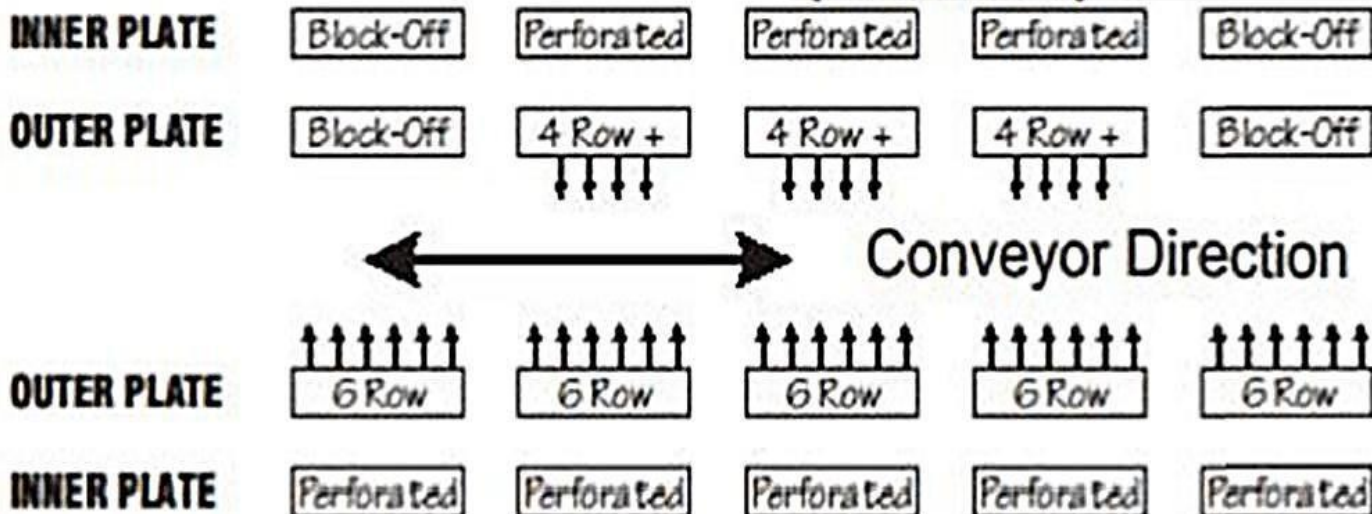

ECN	DESCRIPTION	DATE	BY
10-417	CHANGED FINGER OUTER PLATE TO C VERSION	10/5/2010	SMW

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B	FINGER BODY 32xx BOT NO RAMP	5
2	XA-8001A-32-T	FINGER BODY 32xx TOP NO RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8671C	32xx FINGER OUTER PLATE	8

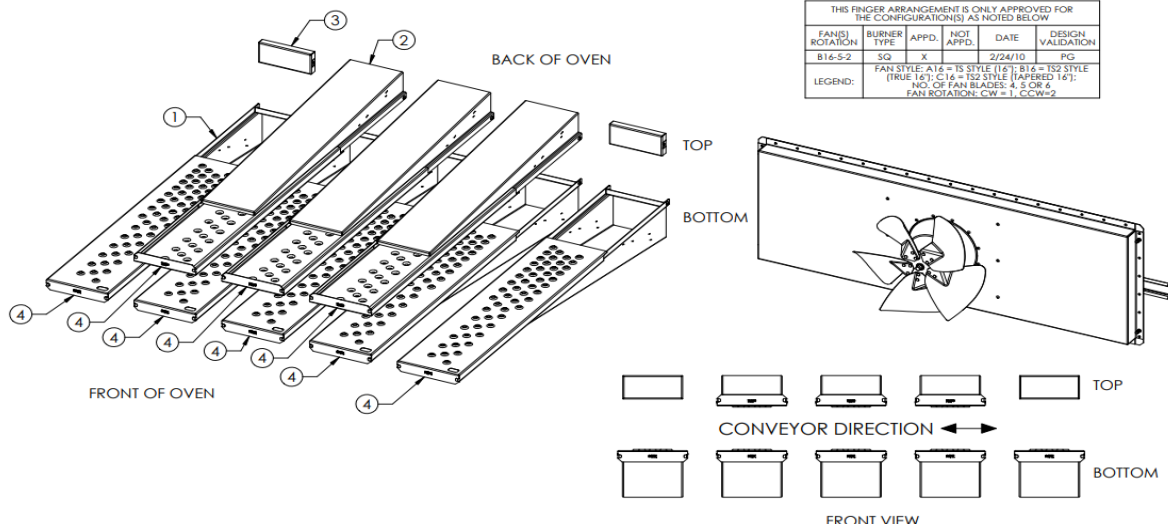

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC, INC. IS PROHIBITED.

SIGNATURE OF ECN'S APPROVAL OR RELEASE OR CHANGE: WCH

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ± .0050 .XXX ± .010
ANGULAR: .1° FRACTIONS: 1/32
DRAWN BY: SMW DATE: 9/20/2010

DESCRIPTION

XLT OVENS
Domino's FINGER CHART STD

MATERIAL: SEE BOM

DWG NO: XA-8D3255-Domino-S


SHEET 1 OF 1
DO NOT SCALE

BOFI XLT 3270 D

Domino's Pizza, LLC Finger Placement Chart


XLT-3270-TS-D

Refer to Operation Standards for
correct time and temperature settings

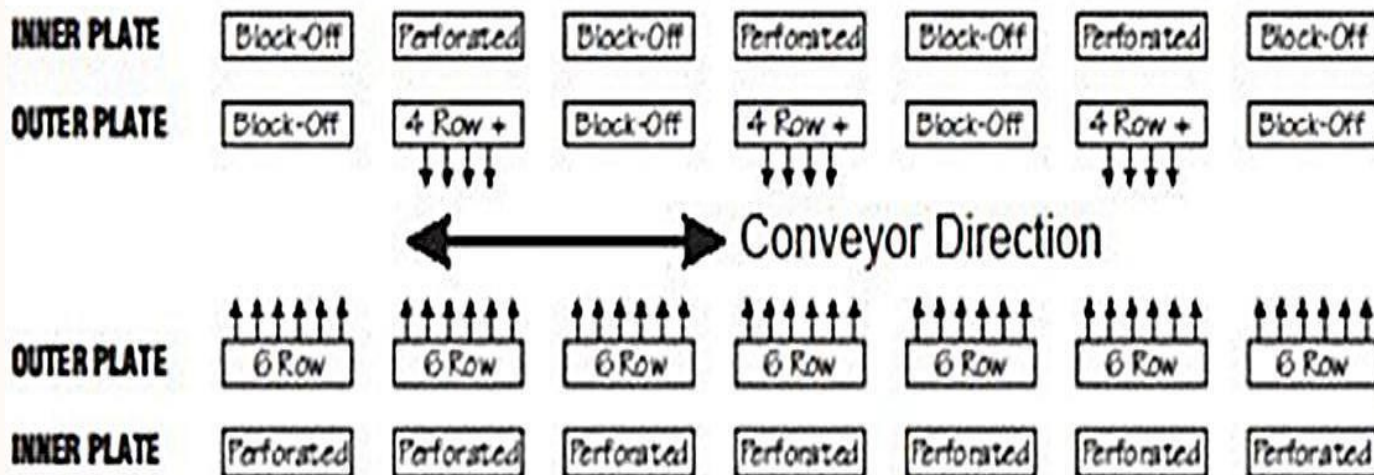



ECN	DESCRIPTION	DATE	BY
10-417	CHANGED FINGER OUTER PLATE TO C VERSION	10/5/2010	SMW

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B	FINGER BODY 32xx BOT NO RAMP	7
2	XA-8001A-32-T	FINGER BODY 32xx TOP NO RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	4
4	XM-8671C	32xx FINGER OUTER PLATE	10

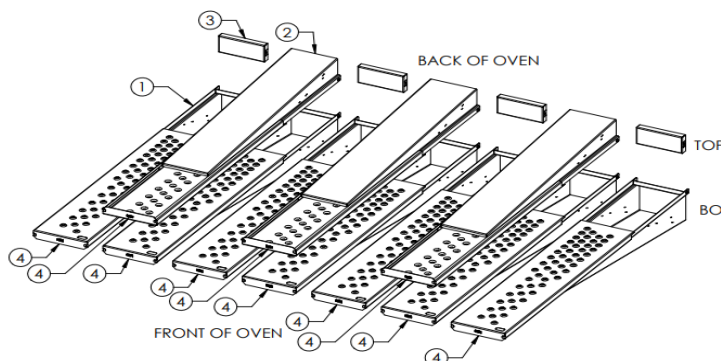

FAN(S) ROTATION	BURNER TYPE	APPO. SQ	NOT APPO. X	DATE	DESIGN VALIDATION
B16-S-2-1				2/24/2010	PG

LEGEND: FAN STYLE: A16 = TS STYLE (1/6"); B16 = TS2 STYLE (1/8"); C16 = TS2 STYLE (1/8"); D16 = TS2 STYLE (1/8"); E16 = TS2 STYLE (1/8"); F16 = TS2 STYLE (1/8"); G16 = TS2 STYLE (1/8"); H16 = TS2 STYLE (1/8"); I16 = TS2 STYLE (1/8"); J16 = TS2 STYLE (1/8"); K16 = TS2 STYLE (1/8"); L16 = TS2 STYLE (1/8"); M16 = TS2 STYLE (1/8"); N16 = TS2 STYLE (1/8"); O16 = TS2 STYLE (1/8"); P16 = TS2 STYLE (1/8"); Q16 = TS2 STYLE (1/8"); R16 = TS2 STYLE (1/8"); S16 = TS2 STYLE (1/8"); T16 = TS2 STYLE (1/8"); U16 = TS2 STYLE (1/8"); V16 = TS2 STYLE (1/8"); W16 = TS2 STYLE (1/8"); X16 = TS2 STYLE (1/8"); Y16 = TS2 STYLE (1/8"); Z16 = TS2 STYLE (1/8");

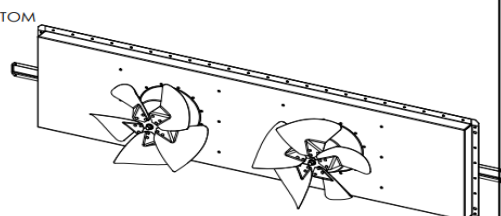
FRONT VIEW

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC, INC. IS PROHIBITED.

SIGNATURE CHECKS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT 67.31

**WOLFE ELECTRIC INC
WICHITA, KANSAS**

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.XX ±0.000 XXX ±0.010
FRACTIONS: 1/16" ±0.005 1/8" ±0.010
ANGLES: ±1° FRACTIONS: 1/16" ±0.005 1/8" ±0.010
DRAWN BY SMW DATE 9/20/2010

DESCRIPTION
XLT OVENS
Domino's FINGER CHART STD

MAIL SEE BOM

DWG


XA-8D3270-Domino-S

 SHEET 1 OF 1
DO NOT SCALE

BOFI XLT 3870 – TS2

Domino's Pizza LLC


Finger Arrangement Placement

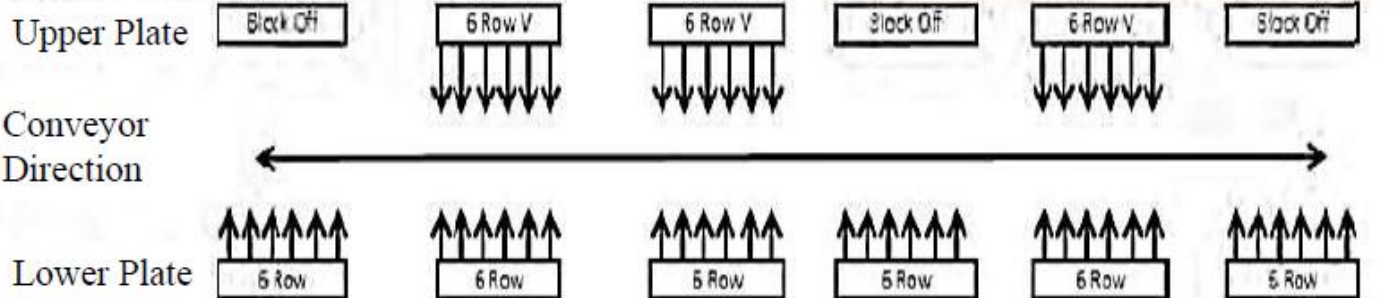


BOFI XLT 3870 G

FCN	Description	Date	By
714	XM-8013A-S Was XM-8013-S; XM-8025B-3240-xx70 Was XM-8025B-xx70; Added (7) XM-8013A-S; Customer Approved	4/18/2019	BNM

Item No.	Part No.	Description	QTY
1	XA-8001C-38-B	Finger Body 38xx Bot No Ramp	7
2	XA-8001C-38-T-PR	Finger Body 38xx Top w/Perf R	6
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8402E	Finger Inner Plate Perforated	13
5	XM-8010C-xx70-B	Finger Support Angle	1
6	XM-8010C-xx70-T	Finger Support Angle	1
7	XM-8013A-S	Finger Retainer Clip	13
8	XM-8024B-xx70	Return Air Plate	5
9	XM-8025B-3240-xx70	Endloss Plate	2
10	XM-8402E	38xx Finger Outer Plate	13

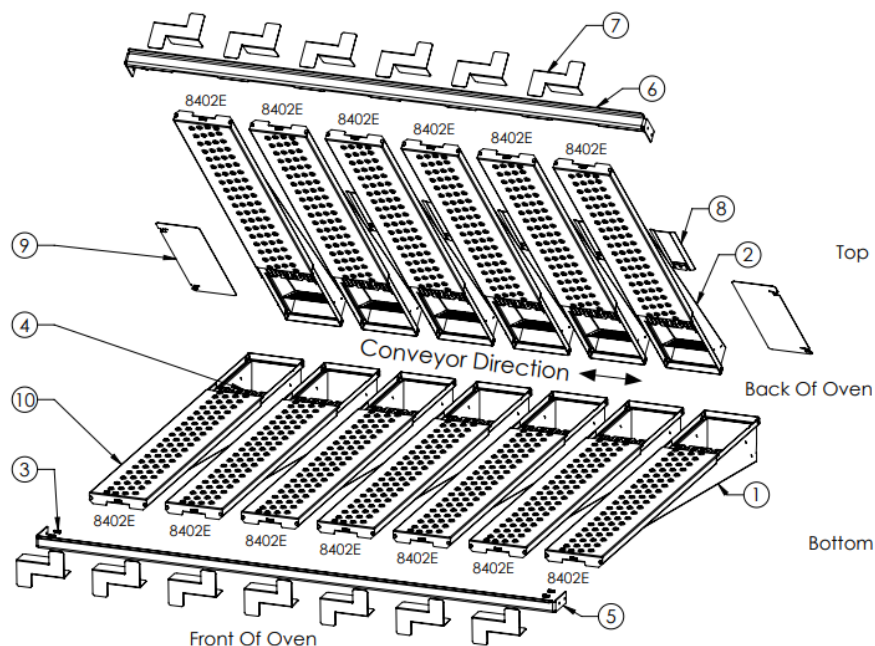

This Finger Chart is Only Approved for The Configuration(s) As Noted Below						
Fan(s) Rotation	Burner Type	Power Supply	Appd.	No Reply	Date	Design Validation
B15-6-1-2	SQ	60 HZ	X		4/18/2019	Cheyenne Rolda
Legend: Fan Style: B15 = IS2 Style (true 15 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2						

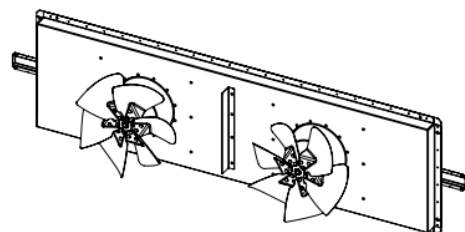

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS
Finger Chart Dominoes Std

MATL See BOM

DWG

XA-8G3870-Domino-S

SHEET 1 OF 2
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT 232.94

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: XX.XX ±0.030 XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY SM DATE 4/6/2016

BOFI XLT 3870 H


Reference	Description	Date	By
H03	XM-8010D-xx70-B Was XM-8010C-xx70-B; XM-8010D-xx70-T Was XM-8010C-xx70-T; Added (13) XF-110; Removed (13) XM-8013A-S; Released For Customer Approval	1/25/2023	DCK

Approval

By: _____

Date: _____

Item No.	Part No.	Description	QTY
1	XA-8001C-38-B-PR	Finger Body 38xx Bot w/Perf R	7
2	XA-8001C-38-T	Finger Body 38xx Top No Ramp	6
3	XF-110	1/4"-14 Thd Fmg Screw	13
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8424E	Finger Inner Plate Perforated	8
6	XM-8004-8426E	Finger Inner Plate Perforated	5
7	XM-8010D-xx70-B	Finger Support Angle	1
8	XM-8010D-xx70-T	Finger Support Angle	1
9	XM-8024B-xx70	Return Air Plate	5
10	XM-8025B-3870	Endloss Plate	2
11	XM-8424E	38xx Finger Outer Plate	2
12	XM-8425E	38xx Finger Outer Plate	2
13	XM-8426E	38xx Finger Outer Plate	5
14	XM-8427E	38xx Finger Outer Plate	4

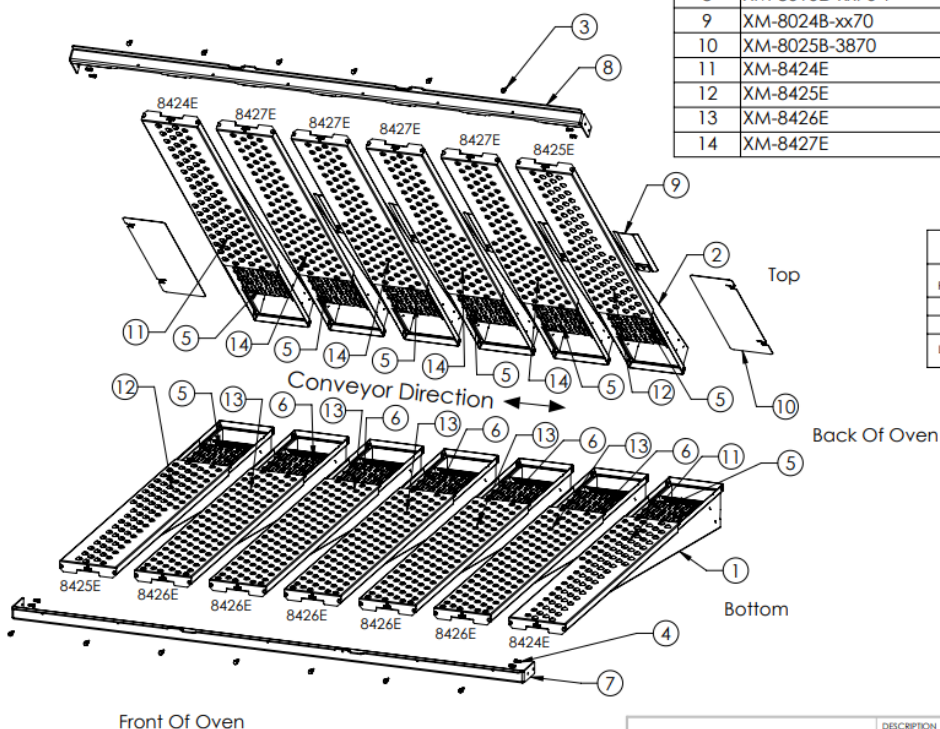

This Finger Chart Is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz			
B17-6-2	SQ	50 Hz			

Legend: Fan Style: B17 = 152 Style (true 1/7)
No. Of Fan Blades: 3, 4 or 6
Fan Rotation: CW = 1, CCW = 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 224.46

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY JSR DATE 10/15/2020

DESCRIPTION

XLT OVENS
Finger Chart Domino

MAIL See BOM

DWG

XA-8H3870-Domino


SHEET 1 OF 1
DO NOT SCALE

XLT 1832-W

REV.	DESCRIPTION	DATE	BY
B	CHG P/N WAS XA-8000-1832-TS-D.O. ADD APPROVAL TEMPLATE, ECH10-351-2; XA-8001A-18-B WAS XA-8001-18-B; XA-8001A-18-T WAS XA-8001-18-T; ECR10-395; ADDED "EL" BAKE APPROVAL.	3/30/2010	DP



ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-18-T	FINGER BODY 18xx TOP NO RAMP	2
2	XA-8001A-18-B	FINGER BODY 18xx BOT NO RAMP	3
3	XM-8004-18xx	FINGER INNER PLATE PERFORATED 18xx	5
4	XM-8009-S	FINGER BLOCK OFF PLATE	1
5	XM-8611	18xx 6 ROW VAR 7/16 FINGER OUTER	5

XLT- 83 -

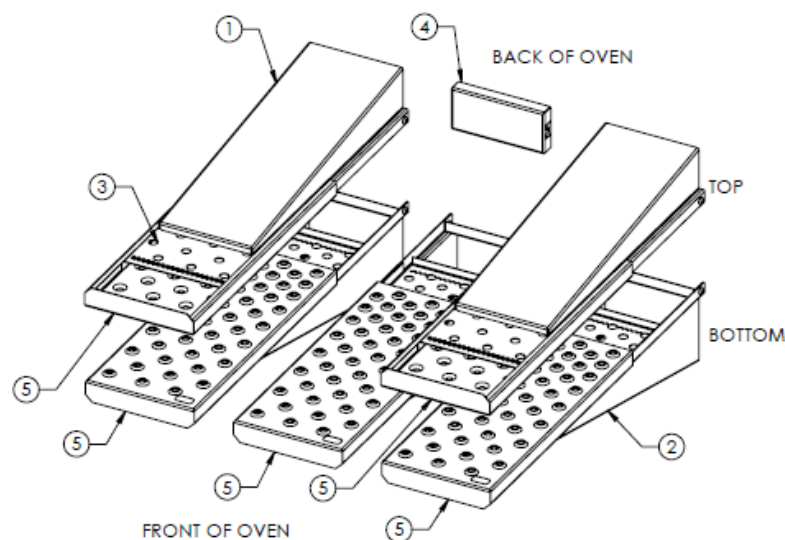

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPLD.	DATE	DESIGN VALIDATION
A16-4-2	RO	X		2/24/2010	PG
A16-4-2	EL	X		2/24/2010	PG

LEGEND: FAN STYLE: A16 = TS STYLE (16"); B16 = TS2 STYLE (TRUE 16"); C16 = TS2 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6 FAN ROTATION: CW & T. CCW & 2

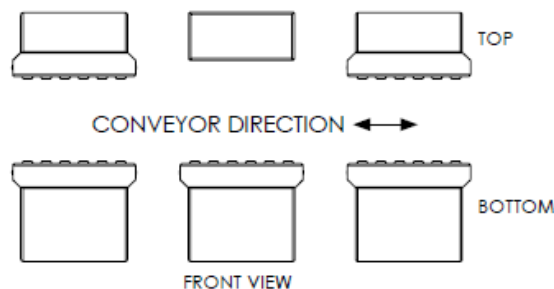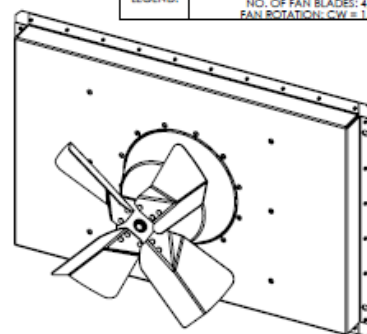

NOTES:
1. BAKE TEMP / TIME: 465° F / 5:30-6:00 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC, INC. IS PROHIBITED.

SIGNATURE ON ECH IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 40.671

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.XX ±0.003 XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY DP DATE 6/29/2009

DESCRIPTION
XLT OVENS
Domino's FINGER CHART WORLD

MATL SEE BOM

DWG XA-8-1832-Domino-W


SHEET 1 OF 1
DO NOT SCALE

XLT 2440-W



REV.	DESCRIPTION	DATE	BY
B	CHG P/N WAS XA-8000-2440-TS-DO; ADD APPROVAL TEMPLATE, ECH10-351-2; XA-8001A-24-B WAS XA-8001-24-B; XA-8001A-24-T WAS XA-8001-24-T; ECR10-395	2/15/2010	DP

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-24-B	FINGER BODY 24xx BOT NO RAMP	4
2	XA-8001A-24-T	FINGER BODY 24xx TOP NO RAMP	2
3	XM-8004-24xx	FINGER INNER PLATE PERFORATED 24xx	6
4	XM-8009-S	FINGER BLOCK OFF PLATE	2
5	XM-8612	24xx 6 ROW VAR 7/16 FINGER OUT	6

XLT-

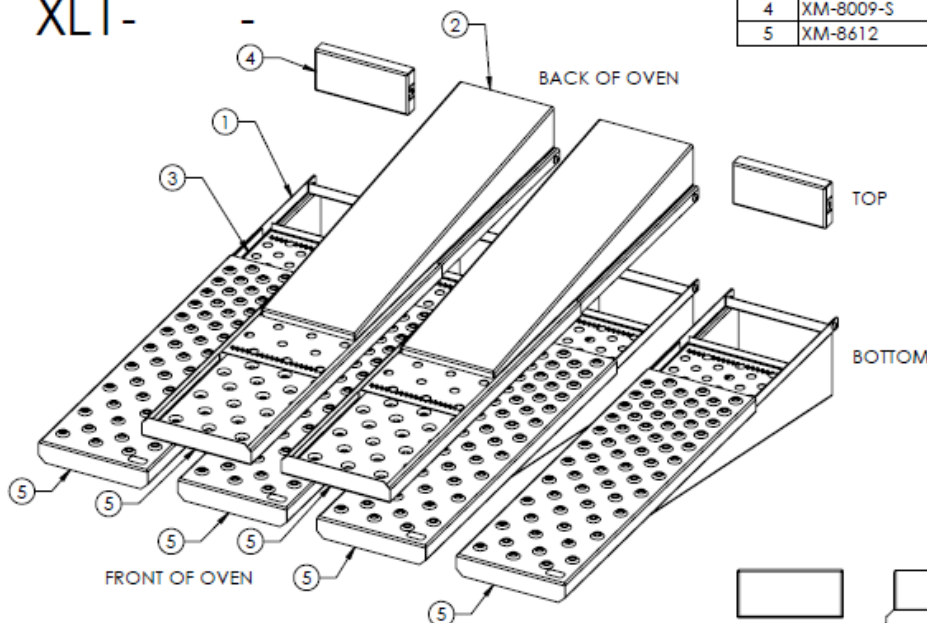

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPO.	DATE	DESIGN VALIDATION
A16-4-2	RO	X		2/24/2010	PG
LEGEND: FAN STYLE: A16 = TS STYLE (16"); B16 = TS2 STYLE (TRUE 16"); C16 = TS2 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6 FAN ROTATION: CW = 1, CCW = 2					

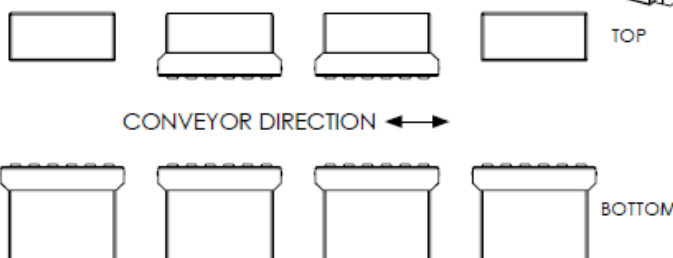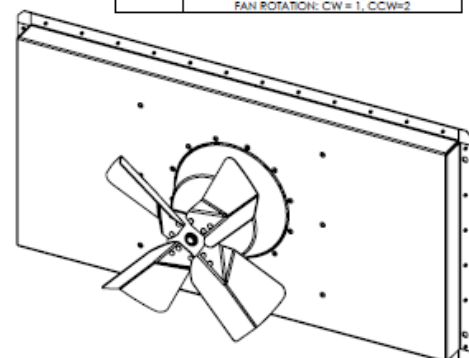

NOTES:

1. BAKE TEMP / TIME: 475° F (245° C) / 4:30 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECH IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT

64.400

WOLFE ELECTRIC INC
WICHITA, KANSAS


UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: 0.00, 0.01, 0.02, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.12, 0.15, 0.18, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00, 1.10, 1.20, 1.30, 1.40, 1.50, 1.60, 1.70, 1.80, 1.90, 2.00, 2.10, 2.20, 2.30, 2.40, 2.50, 2.60, 2.70, 2.80, 2.90, 3.00, 3.10, 3.20, 3.30, 3.40, 3.50, 3.60, 3.70, 3.80, 3.90, 4.00, 4.10, 4.20, 4.30, 4.40, 4.50, 4.60, 4.70, 4.80, 4.90, 5.00, 5.10, 5.20, 5.30, 5.40, 5.50, 5.60, 5.70, 5.80, 5.90, 6.00, 6.10, 6.20, 6.30, 6.40, 6.50, 6.60, 6.70, 6.80, 6.90, 7.00, 7.10, 7.20, 7.30, 7.40, 7.50, 7.60, 7.70, 7.80, 7.90, 8.00, 8.10, 8.20, 8.30, 8.40, 8.50, 8.60, 8.70, 8.80, 8.90, 9.00, 9.10, 9.20, 9.30, 9.40, 9.50, 9.60, 9.70, 9.80, 9.90, 10.00, 10.10, 10.20, 10.30, 10.40, 10.50, 10.60, 10.70, 10.80, 10.90, 11.00, 11.10, 11.20, 11.30, 11.40, 11.50, 11.60, 11.70, 11.80, 11.90, 12.00, 12.10, 12.20, 12.30, 12.40, 12.50, 12.60, 12.70, 12.80, 12.90, 13.00, 13.10, 13.20, 13.30, 13.40, 13.50, 13.60, 13.70, 13.80, 13.90, 14.00, 14.10, 14.20, 14.30, 14.40, 14.50, 14.60, 14.70, 14.80, 14.90, 15.00, 15.10, 15.20, 15.30, 15.40, 15.50, 15.60, 15.70, 15.80, 15.90, 16.00, 16.10, 16.20, 16.30, 16.40, 16.50, 16.60, 16.70, 16.80, 16.90, 17.00, 17.10, 17.20, 17.30, 17.40, 17.50, 17.60, 17.70, 17.80, 17.90, 18.00, 18.10, 18.20, 18.30, 18.40, 18.50, 18.60, 18.70, 18.80, 18.90, 19.00, 19.10, 19.20, 19.30, 19.40, 19.50, 19.60, 19.70, 19.80, 19.90, 20.00, 20.10, 20.20, 20.30, 20.40, 20.50, 20.60, 20.70, 20.80, 20.90, 21.00, 21.10, 21.20, 21.30, 21.40, 21.50, 21.60, 21.70, 21.80, 21.90, 22.00, 22.10, 22.20, 22.30, 22.40, 22.50, 22.60, 22.70, 22.80, 22.90, 23.00, 23.10, 23.20, 23.30, 23.40, 23.50, 23.60, 23.70, 23.80, 23.90, 24.00, 24.10, 24.20, 24.30, 24.40, 24.50, 24.60, 24.70, 24.80, 24.90, 25.00, 25.10, 25.20, 25.30, 25.40, 25.50, 25.60, 25.70, 25.80, 25.90, 26.00, 26.10, 26.20, 26.30, 26.40, 26.50, 26.60, 26.70, 26.80, 26.90, 27.00, 27.10, 27.20, 27.30, 27.40, 27.50, 27.60, 27.70, 27.80, 27.90, 28.00, 28.10, 28.20, 28.30, 28.40, 28.50, 28.60, 28.70, 28.80, 28.90, 29.00, 29.10, 29.20, 29.30, 29.40, 29.50, 29.60, 29.70, 29.80, 29.90, 30.00, 30.10, 30.20, 30.30, 30.40, 30.50, 30.60, 30.70, 30.80, 30.90, 31.00, 31.10, 31.20, 31.30, 31.40, 31.50, 31.60, 31.70, 31.80, 31.90, 32.00, 32.10, 32.20, 32.30, 32.40, 32.50, 32.60, 32.70, 32.80, 32.90, 33.00, 33.10, 33.20, 33.30, 33.40, 33.50, 33.60, 33.70, 33.80, 33.90, 34.00, 34.10, 34.20, 34.30, 34.40, 34.50, 34.60, 34.70, 34.80, 34.90, 35.00, 35.10, 35.20, 35.30, 35.40, 35.50, 35.60, 35.70, 35.80, 35.90, 36.00, 36.10, 36.20, 36.30, 36.40, 36.50, 36.60, 36.70, 36.80, 36.90, 37.00, 37.10, 37.20, 37.30, 37.40, 37.50, 37.60, 37.70, 37.80, 37.90, 38.00, 38.10, 38.20, 38.30, 38.40, 38.50, 38.60, 38.70, 38.80, 38.90, 39.00, 39.10, 39.20, 39.30, 39.40, 39.50, 39.60, 39.70, 39.80, 39.90, 40.00, 40.10, 40.20, 40.30, 40.40, 40.50, 40.60, 40.70, 40.80, 40.90, 41.00, 41.10, 41.20, 41.30, 41.40, 41.50, 41.60, 41.70, 41.80, 41.90, 42.00, 42.10, 42.20, 42.30, 42.40, 42.50, 42.60, 42.70, 42.80, 42.90, 43.00, 43.10, 43.20, 43.30, 43.40, 43.50, 43.60, 43.70, 43.80, 43.90, 44.00, 44.10, 44.20, 44.30, 44.40, 44.50, 44.60, 44.70, 44.80, 44.90, 45.00, 45.10, 45.20, 45.30, 45.40, 45.50, 45.60, 45.70, 45.80, 45.90, 46.00, 46.10, 46.20, 46.30, 46.40, 46.50, 46.60, 46.70, 46.80, 46.90, 47.00, 47.10, 47.20, 47.30, 47.40, 47.50, 47.60, 47.70, 47.80, 47.90, 48.00, 48.10, 48.20, 48.30, 48.40, 48.50, 48.60, 48.70, 48.80, 48.90, 49.00, 49.10, 49.20, 49.30, 49.40, 49.50, 49.60, 49.70, 49.80, 49.90, 50.00, 50.10, 50.20, 50.30, 50.40, 50.50, 50.60, 50.70, 50.80, 50.90, 51.00, 51.10, 51.20, 51.30, 51.40, 51.50, 51.60, 51.70, 51.80, 51.90, 52.00, 52.10, 52.20, 52.30, 52.40, 52.50, 52.60, 52.70, 52.80, 52.90, 53.00, 53.10, 53.20, 53.30, 53.40, 53.50, 53.60, 53.70, 53.80, 53.90, 54.00, 54.10, 54.20, 54.30, 54.40, 54.50, 54.60, 54.70, 54.80, 54.90, 55.00, 55.10, 55.20, 55.30, 55.40, 55.50, 55.60, 55.70, 55.80, 55.90, 56.00, 56.10, 56.20, 56.30, 56.40, 56.50, 56.60, 56.70, 56.80, 56.90, 57.00, 57.10, 57.20, 57.30, 57.40, 57.50, 57.60, 57.70, 57.80, 57.90, 58.00, 58.10, 58.20, 58.30, 58.40, 58.50, 58.60, 58.70, 58.80, 58.90, 59.00, 59.10, 59.20, 59.30, 59.40, 59.50, 59.60, 59.70, 59.80, 59.90, 60.00, 60.10, 60.20, 60.30, 60.40, 60.50, 60.60, 60.70, 60.80, 60.90, 61.00, 61.10, 61.20, 61.30, 61.40, 61.50, 61.60, 61.70, 61.80, 61.90, 62.00, 62.10, 62.20, 62.30, 62.40, 62.50, 62.60, 62.70, 62.80, 62.90, 63.00, 63.10, 63.20, 63.30, 63.40, 63.50, 63.60, 63.70, 63.80, 63.90, 64.00, 64.10, 64.20, 64.30, 64.40, 64.50, 64.60, 64.70, 64.80, 64.90, 65.00, 65.10, 65.20, 65.30, 65.40, 65.50, 65.60, 65.70, 65.80, 65.90, 66.00, 66.10, 66.20, 66.30, 66.40, 66.50, 66.60, 66.70, 66.80, 66.90, 67.00, 67.10, 67.20, 67.30, 67.40, 67.50, 67.60, 67.70, 67.80, 67.90, 68.00, 68.10, 68.20, 68.30, 68.40, 68.50, 68.60, 68.70, 68.80, 68.90, 69.00, 69.10, 69.20, 69.30, 69.40, 69.50, 69.60, 69.70, 69.80, 69.90, 70.00, 70.10, 70.20, 70.30, 70.40, 70.50, 70.60, 70.70, 70.80, 70.90, 71.00, 71.10, 71.20, 71.30, 71.40, 71.50, 71.60, 71.70, 71.80, 71.90, 72.00, 72.10, 72.20, 72.30, 72.40, 72.50, 72.60, 72.70, 72.80, 72.90, 73.00, 73.10, 73.20, 73.30, 73.40, 73.50, 73.60, 73.70, 73.80, 73.90, 74.00, 74.10, 74.20, 74.30, 74.40, 74.50, 74.60, 74.70, 74.80, 74.90, 75.00, 75.10, 75.20, 75.30, 75.40, 75.50, 75.60, 75.70, 75.80, 75.90, 76.00, 76.10, 76.20, 76.30, 76.40, 76.50, 76.60, 76.70, 76.80, 76.90, 77.00, 77.10, 77.20, 77.30, 77.40, 77.50, 77.60, 77.70, 77.80, 77.90, 78.00, 78.10, 78.20, 78.30, 78.40, 78.50, 78.60, 78.70, 78.80, 78.90, 79.00, 79.10, 79.20, 79.30, 79.40, 79.50, 79.60, 79.70, 79.80, 79.90, 80.00, 80.10, 80.20, 80.30, 80.40, 80.50, 80.60, 80.70, 80.80, 80.90, 81.00, 81.10, 81.20, 81.30, 81.40, 81.50, 81.60, 81.70, 81.80, 81.90, 82.00, 82.10, 82.20, 82.30, 82.40, 82.50, 82.60, 82.70, 82.80, 82.90, 83.00, 83.10, 83.20, 83.30, 83.40, 83.50, 83.60, 83.70, 83.80, 83.90, 84.00, 84.10, 84.20, 84.30, 84.40, 84.50, 84.60, 84.70, 84.80, 84.90, 85.00, 85.10, 85.20, 85.30, 85.40, 85.50, 85.60, 85.70, 85.80, 85.90, 86.00, 86.10, 86.20, 86.30, 86.40, 86.50, 86.60, 86.70, 86.80, 86.90, 87.00, 87.10, 87.20, 87.30, 87.40, 87.50, 87.60, 87.70, 87.80, 87.90, 88.00, 88.10, 88.20, 88.30, 88.40, 88.50, 88.60, 88.70, 88.80, 88.90, 89.00, 89.10, 89.20, 89.30, 89.40, 89.50, 89.60, 89.70, 89.80, 89.90, 90.00, 90.10, 90.20, 90.30, 90.40, 90.50, 90.60, 90.70, 90.80, 90.90, 91.00, 91.10, 91.20, 91.30, 91.40, 91.50, 91.60, 91.70, 91.80, 91.90, 92.00, 92.10, 92.20, 92.30, 92.40, 92.50, 92.60, 92.70, 92.80, 92.90, 93.00, 93.10, 93.20, 93.30, 93.40, 93.50, 93.60, 93.70, 93.80, 93.90, 94.00, 94.10, 94.20, 94.30, 94.40, 94.50, 94.60, 94.70, 94.80, 94.90, 95.00, 95.10, 95.20, 95.30, 95.40, 95.50, 95.60, 95.70, 95.80, 95.90, 96.00, 96.10, 96.20, 96.30, 96.40, 96.50, 96.60, 96.70, 96.80, 96.90, 97.00, 97.10, 97.20, 97.30, 97.40, 97.50, 97.60, 97.70, 97.80, 97.90, 98.00, 98.10, 98.20, 98.30, 98.40, 98.50, 98.60, 98.70, 98.80, 98.90, 99.00, 99.10, 99.20, 99.30, 99.40, 99.50, 99.60, 99.70, 99.80, 99.90, 100.00, 100.10, 100.20, 100.30, 100.40, 100.50, 100.60, 100.70, 100.80, 100.90, 101.00, 101.10, 101.20, 101.30, 101.40, 101.50, 101.60, 101.70, 101.80, 101.90, 102.00, 102.10, 102.20, 102.30, 102.40, 102.50, 102.60, 102.70, 102.80, 102.90, 103.00, 103.10, 103.20, 103.30, 103.40, 103.50, 103.60, 103.70, 103.80, 103.90, 104.00, 104.10, 104.20, 104.30, 104.40, 104.50, 104.60, 104.70, 104.80, 104.90, 105.00, 105.10, 105.20, 105.30, 105.40, 105.50, 105.60, 105.70, 105.80, 105.90, 106.00, 106.10, 106.20, 106.30, 106.40, 106.50, 106.60, 106.70, 106.80, 106.90, 107.00, 107.10, 107.20, 107.30, 107.40, 107.50, 107.60, 107.70, 107.80, 107.90, 108.00, 108.10, 108.20, 108.30, 108.40, 108.50, 108.60, 108.70, 108.80, 108.90, 109.00, 109.10, 109.20, 109.30, 109.40, 109.50, 109.60, 109.70, 109.80, 109.90, 110.00, 110.10, 110.20, 110.30, 110.40, 110.50, 110.60, 110.70, 110.80, 110.90, 111.00, 111.10, 111.20, 111.30, 111.40, 111.50, 111.60, 111.70, 111.80, 111.90, 112.00, 112.10, 112.20, 112.30, 112.40, 112.50, 112.60, 112.70, 112.80, 112.90, 113.00, 113.10, 113.20, 113.30, 113.40, 113.50, 113.60, 113.70, 113.80, 113.90, 114.00, 114.10, 114.20, 114.30, 114.40, 114.50, 114.60, 114.70, 114.80, 114.90, 115.00, 115.10, 115.20, 115.30, 115.40, 115.50, 115.60, 115.70, 115.80, 115.90, 116.00, 116.10, 116.20, 116.30, 116.40, 116.50, 116.60, 116.70, 116.80, 116.90, 117.00, 117.10, 117.20, 117.30, 117.40, 117.50, 117.60, 117.70, 117.80, 117.90, 118.00, 118.10, 118.20, 118.30, 118.40, 118.50, 118.60, 118.70, 118.80, 118.90, 119.00, 119.10, 119.20, 119.30, 119.40, 119.50, 119.60, 119.70, 119.80, 119.90, 120.00, 120.10, 120.20, 120.30, 120.40, 120.50, 120.60, 120.70, 120.80, 120.90, 121.00, 121.10, 121.20, 121.30, 121.40, 121.50, 121.60, 121.70, 121.80, 121.90, 122.00, 122.10, 122.20, 122.30, 122.40, 122.50, 122.60, 122.70, 122.80, 122.90, 123.00, 123.10, 123.20, 123.30, 123.40, 123.50, 123.60, 123.70, 123.80, 123.90, 124.00, 124.10, 124.20, 124.30, 124.40, 124.50, 124.60, 124.70, 124.80, 124.90, 125.00, 125.10, 125.20, 125.30, 125.40, 125.50, 125.60, 125.70, 125.80, 125.90, 126.00, 126.10, 126.20, 126.30, 126.40, 126.50, 126.60, 126.70, 126.80, 126.90, 127.00, 127.10, 127.20, 127.30, 127.40, 127.50, 127.60, 127.70, 127.80, 127.90, 128.00, 128.10, 128.20, 128.30, 128.40, 128.50, 128.60, 128.70, 128.80, 128.90, 129.00, 129.10, 129.20, 129.30, 129.40, 129.50, 129.60, 129.70, 129.80, 129.90, 130.00, 130.10, 130.20, 130.30, 130.40, 130.50, 130.60, 130.70, 130.80, 130.90, 131.00, 131.10, 131.20, 131.30, 131.40, 131.50, 131.60, 131.70, 131.80, 131.90, 132.00, 132.10, 132.20, 132.30, 132.40, 132.50, 132.60, 132.70, 132.80, 132.90, 133.00, 133.10, 133.20, 133.30, 133.40, 133.50, 133.60, 133.70, 133.80, 133.90, 134.00, 134.10, 134.20, 134.30, 134.40, 134.50, 134.60, 134.70, 134.80, 134.90, 135.00, 135.10, 135.20, 135.30, 135.40, 135.50, 135.60, 135.70, 135.80, 135.90, 136.00, 136.10, 136.20, 136.30, 136.40, 136.50, 136.60, 136.70, 136.80, 136.90, 137.00, 137.10, 137.20, 137.30, 137.40, 137.50, 137.60, 137.70, 137.80, 137.90, 138.00, 138.10, 138.20, 138.30, 138.40, 138.50, 138.60, 138.70, 138.80, 138.90, 139.00, 139.10, 139.20, 139.30, 139.40, 139.50, 139.60, 139.70, 139.80, 139.90, 140.00, 140.10, 140.20, 140.30, 140.40, 140.50, 140.60, 140.70, 140.80, 140.90, 141.00, 141.10, 141.20, 141.30, 141.40, 141.50, 141.60, 141.70, 141.80, 141.90, 142.00, 142.10, 142.20, 142.30, 142.40, 142.50, 142.60, 142.70, 142.80, 142.90, 143.00, 143.10, 143.20, 143.30, 1

XLT 3240-S



REV.	DESCRIPTION	DATE	BY
C	CHG P/N WAS XA-8000-3240-TS3-DO; ADD APPROVAL TEMPLATE; XA-8001A-32-B-PR WAS XA-8001-32-B-R; XA-8001A-32-T-PR WAS XA-8001-32-T-R, ECH10-395-1;	4/7/2010	DP

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B-PR	FINGER BODY 32 BOT W/PERF RAMP	4
2	XA-8001A-32-T-PR	FINGER BODY 32 TOP W/PERF RAMP	2
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8303	3240 FINGER COVER (7/16 dia)	6

XLT-3 -

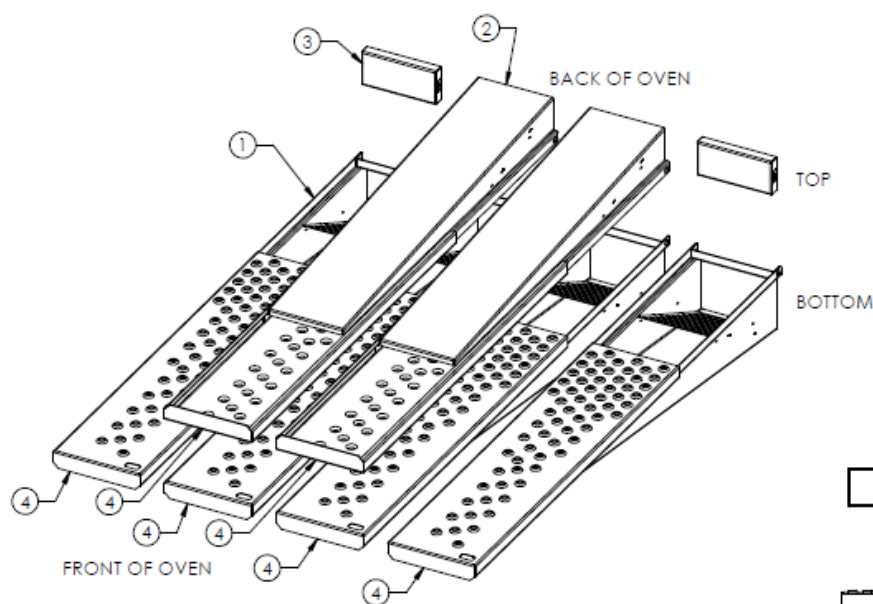

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPD.	DATE	DESIGN VALIDATION
A16-4-2	SO	X		4/7/2010	PG
LEGEND: FAN STYLE: A16 = 15 STYLE (14°); B16 = 152 STYLE (TRUE 14°); C16 = 152 STYLE (TAPERED 14°); NO. OF FAN BLADES: 4, 5 OR 6; FAN ROTATION: CW = 1, CCW = 2					

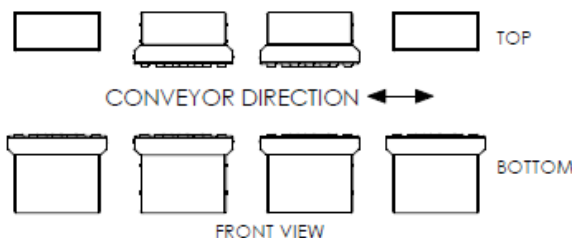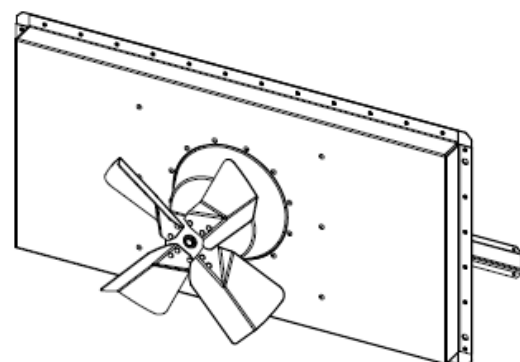

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON EACH APPROVAL OF RELEASE OR CHANGE

WEIGHT 68.125

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±0.000 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY DP DATE 6/29/2009

DESCRIPTION

XLT OVENS

Domino's FINGER CHART STANDARD

MAT. SEE BOM

DWG




XA-8-3240-Domino-S

SHEET 1 OF 1

DO NOT SCALE

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B	FINGER BODY 32xx BOT NO RAMP	5
2	XA-8001A-32-T	FINGER BODY 32xx TOP NO RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8301	32xx 3 R+ VAR 7/16 FINGER OUT	8

XLT-3 55-

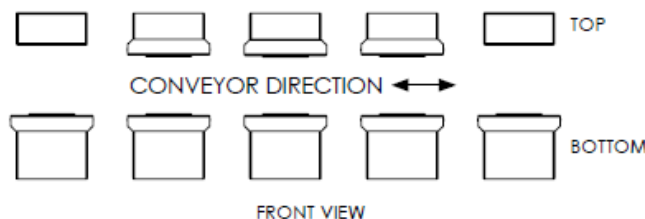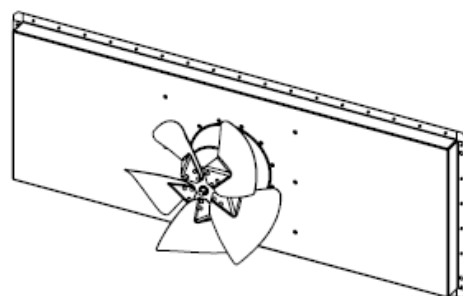

NOTES:
1. BAKE TEMP / TIME: 475° F / 6:00 MINUTES.

BAKE TEMP / TIME: 475 F / 6.00 MINUTES.		WOLF ELECTRIC INC WICHITA, KANSAS		DESCRIPTION XLT OVENS Domino's FRYER CHART STD.	
FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).		☐ WARRANTY (CW) ☐ CUSTOMER REPLACEMENT (CS)		MATL SEE BOM	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLF ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLF ELECTRIC INC. IS PROHIBITED.		SIGNATURE ON ECH IS APPROVAL OF RELEASE OR CHANGE.		DWG XA-8-3255-Domino-S	
WEIGHT 85.729		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES & TOLERANCES ARE: DECIMALS: .000 +0.000 - .000 ANGULAR: ±1° PRACTICAL: ±1.0°		DATE 6/3/2009	
				SHEET 1 OF 1 DO NOT SCALE	


XLT 3255F

FCN	Description	Date	By
664	XM-80248-xx55 Was XM-80248-3255; XM-80258-xx55 Was XM-80258-3255	5/25/2016	RWP

Approval



By: _____ Date: _____

XLT-3 55

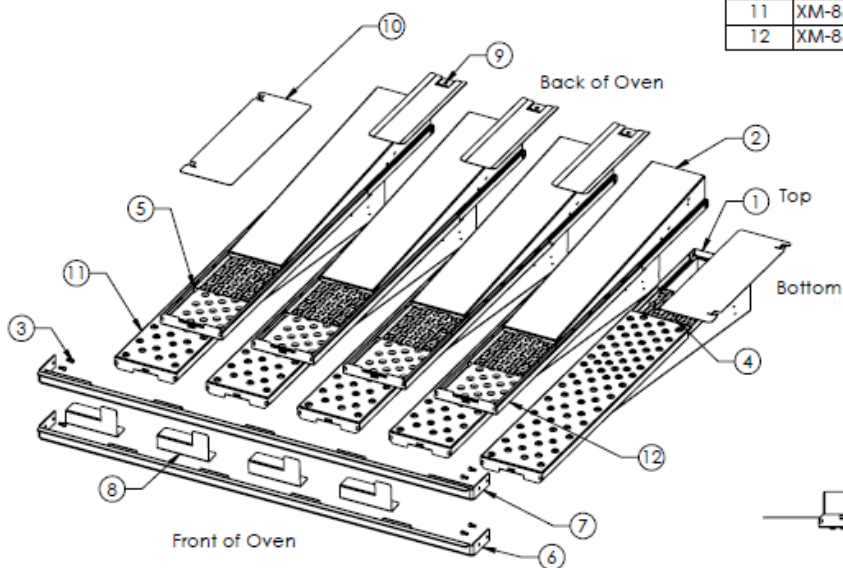

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	5
2	XA-8001C-32-T-PR-105	Finger Body 32xx Top w/Perf R	4
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8616E	Finger Inner Plate Perforated	5
5	XM-8004-8679E	Finger Inner Plate Perforated	4
6	XM-8010C-xx55-B	Finger Support Angle	1
7	XM-8010C-xx55-T	Finger Support Angle	1
8	XM-8013-S	Finger Retainer Clip	4
9	XM-80248-xx55	Return Air Plate	3
10	XM-80258-xx55	Endless Plate	2
11	XM-8616E	32xx Finger Outer Plate	5
12	XM-8679E	32xx Finger Outer Plate	4

This Finger Chart is Only Approved for The Configuration(s) as Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	No Reply	Date
B15-4-2	SQ	60 HZ			
Legend: Fan Style: B15 = 152 Style (True 15 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2					

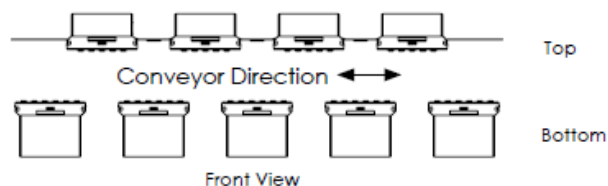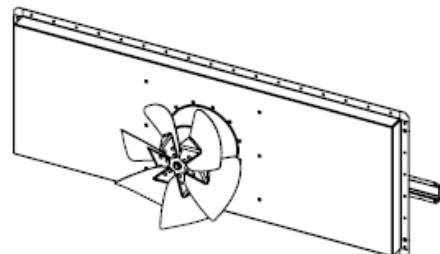

WOLFE ELECTRIC INC WICHITA, KANSAS		DESCRIPTION XLT OVENS Finger Chart Dominos Std E	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES & TOLERANCES ARE: DECIMALS: .000 .0000 .0005 .0010 ANGULAR: .1° FRACTIONS: 1/32		MATL see BOM	
DRAWN BY CJB DATE 8/5/2015		DWG XA-8F3255-Domino-S-E	SHEET 1 OF 1 DO NOT SCALE


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE. WEIGHT 143.04

XLT 3255G



FCN	Description	Date	By
664	Customer Approved	11/08/17	DCK

XLT-3 55

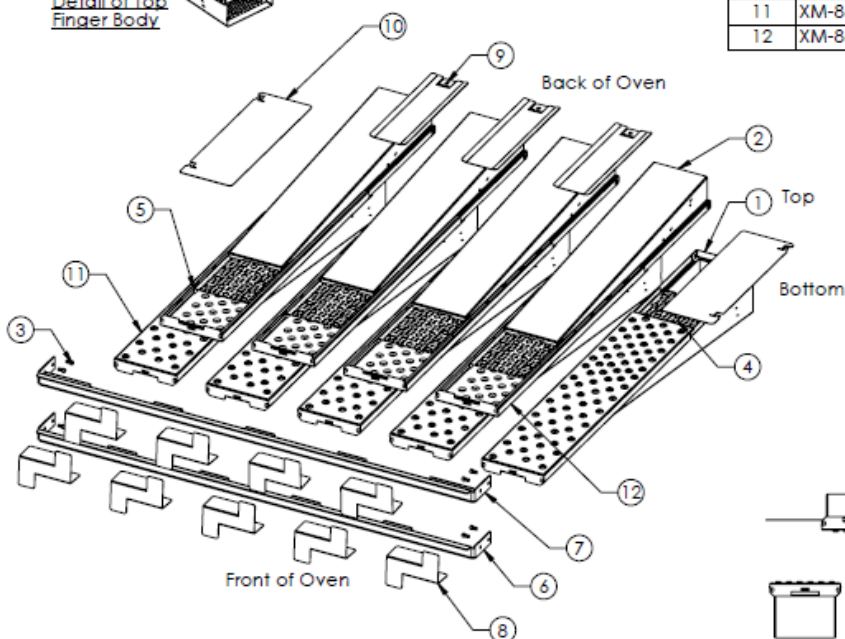

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	5
2	XA-8001C-32-T-PR-105	Finger Body 32xx Top w/Perf R	4
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8616E	Finger Inner Plate Perforated	5
5	XM-8004-8679E	Finger Inner Plate Perforated	4
6	XM-8010C-xx55-B	Finger Support Angle	1
7	XM-8010C-xx55-T	Finger Support Angle	1
8	XM-8013A-S	Finger Retainer Clip	9
9	XM-8024B-xx55	Return Air Plate	3
10	XM-8025B-xx55	Endloss Plate	2
11	XM-8616E	32xx Finger Outer Plate	5
12	XM-8679E	32xx Finger Outer Plate	4

This Finger Chart is Only Approved for The Configuration(s) as Noted Below						
Fan(s) Rotation	Burner Type	Power Supply	Appld.	No Reply	Date	Design Validation
B15-6-2	SQ	60 HZ	X		11/07/17	Jason Bobbitt
Legend: Fan Style: B15 = 1st Style (True 15 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW=2						

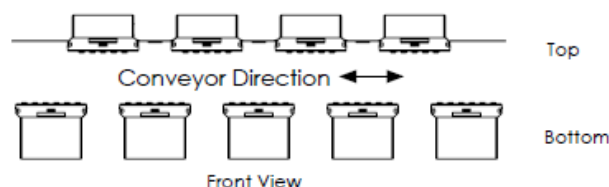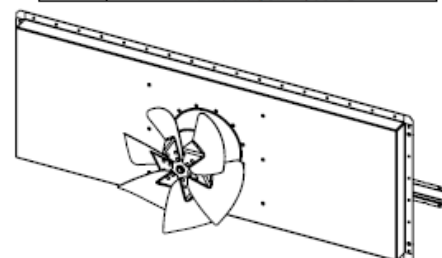

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION
XLT OVENS
Finger Chart Dominos Std E

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±.0000 .XXX ±.0010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY: CJB DATE: 8/5/2015

MATL: See BOM

DWG: XA-8G3255-Domino-S-E

SHEET 1 OF 2
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC. IS PROHIBITED.

SIGNATURE ON EACH IS APPROVAL OF RELEASE OR CHANGE.


WEIGHT 145.48

XLT 3255H

L-R FLOW

Reference	Description	Date	By
AFC	Customer Approved	4/1/2024	MMB

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	5
2	XA-8001C-32-T-P1-105	Finger Body 32xx Top w/Perf R	4
3	XF-110	1/4"-14 Thd Fmg Screw	9
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8608E	Finger Inner Plate Perforated	1
6	XM-8004-8679E	Finger Inner Plate Perforated	2
7	XM-8004-8683E	Finger Inner Plate Perforated	2
8	XM-8004-8694F	Finger Inner Plate Perforated	4
9	XM-8010D-xx55-B	Finger Support Angle	1
10	XM-8010D-xx55-T	Finger Support Angle	1
11	XM-8024B-xx55	Return Air Plate	3
12	XM-8025B-xx55	Endloss Plate	2
13	XM-8608E	32xx Finger Outer Plate	1
14	XM-8609E	32xx Finger Outer Plate	1
15	XM-8610E	32xx Finger Outer Plate	1
16	XM-8683E	32xx Finger Outer Plate	2
17	XM-8694F	32xx Finger Outer Plate	4

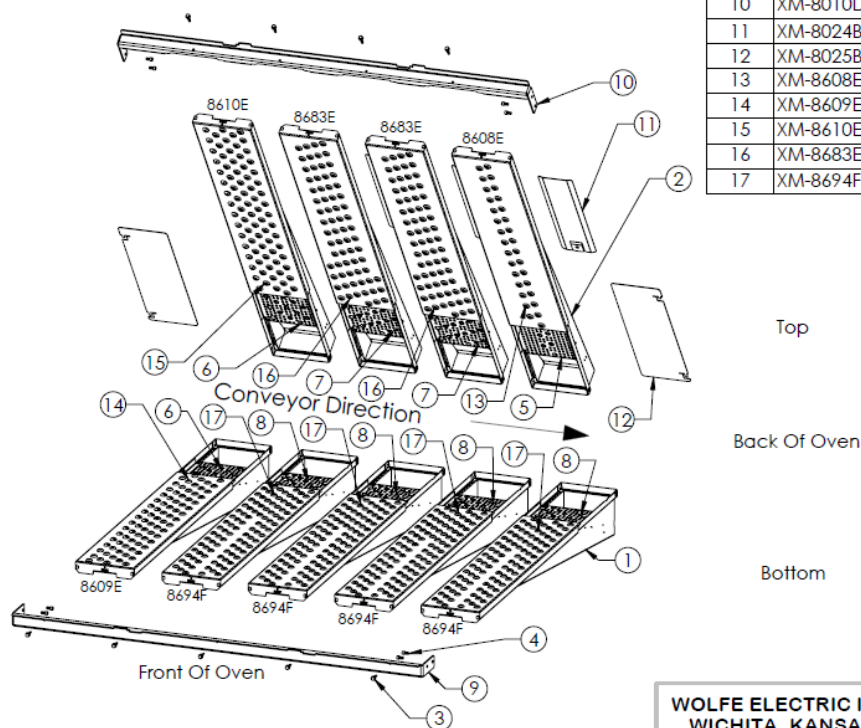

This Finger Chart is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
817-4-2	5G	60 Hz	X	3/28/2024	Jason Bobbitt
817-6-2	5G	50 Hz			
Legend: Fan Style: 817 = 152 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2					

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS

Finger Chart Dominos

MAIL See BOM

DWG

XA-8H3255-Domino-LR

SHEET 1 OF 2
DO NOT SCALE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY MMB DATE 1/5/2023

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT 138.18


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

XLT 3255H

R-L FLOW

Reference	Description	Date	By
AFC	Customer Approved	4/1/2024	MMB

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	5
2	XA-8001C-32-T-P1-105	Finger Body 32xx Top w/Perf R	4
3	XF-110	1/4"-14 Thd Fmg Screw	9
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8608E	Finger Inner Plate Perforated	1
6	XM-8004-8679E	Finger Inner Plate Perforated	2
7	XM-8004-8683E	Finger Inner Plate Perforated	2
8	XM-8004-8694F	Finger Inner Plate Perforated	4
9	XM-8010D-xx55-B	Finger Support Angle	1
10	XM-8010D-xx55-T	Finger Support Angle	1
11	XM-8024B-xx55	Return Air Plate	3
12	XM-8025B-xx55	Endloss Plate	2
13	XM-8608E	32xx Finger Outer Plate	1
14	XM-8609E	32xx Finger Outer Plate	1
15	XM-8610E	32xx Finger Outer Plate	1
16	XM-8683E	32xx Finger Outer Plate	2
17	XM-8694F	32xx Finger Outer Plate	4

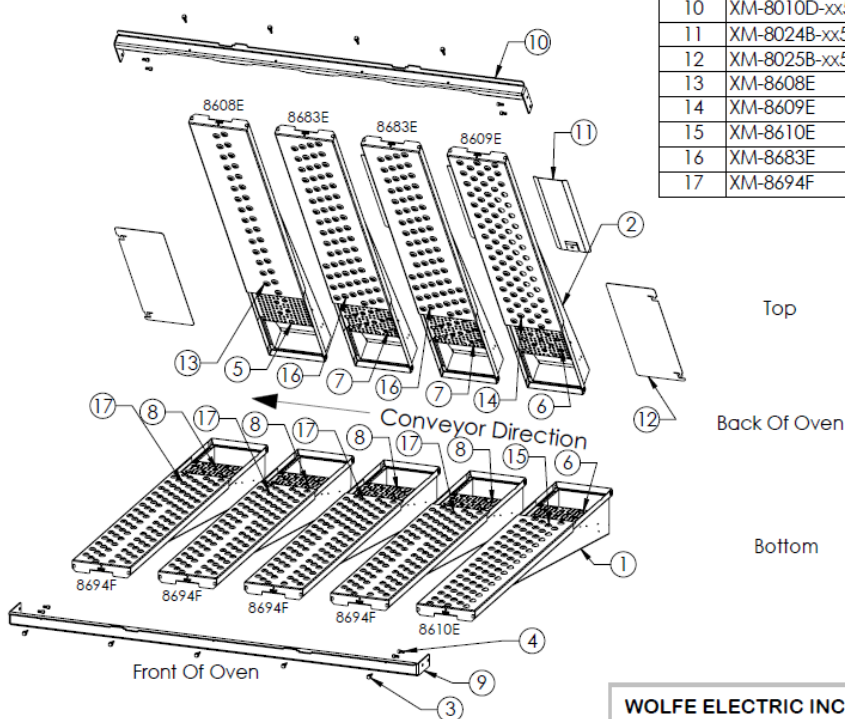

This Finger Chart is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
817-4-2	5Q	60 Hz	X	3/28/2024	Jason Bobbitt
817-6-2	5Q	60 Hz			
Legend: Fan Style: 817 = 152 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2					

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE OR CHECK IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 138.18

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .001, .002, .003, .005, .010
ANGULAR: ±1° FRACTIONS: ±1/32

DRAWN BY JSR DATE 3/19/2020

DESCRIPTION	
XLT OVENS Finger Chart Dominos	
MATL	See BOM
DWG	XA-8H3255-Domino-RL


SHEET 1 OF 2
DO NOT SCALE

XLT 3265 H DS

Reference	Description	Date	By
H03	(1) XA-8001C-32-T-DS Was (1) XA-8001C-32-T-PR12DS, (1) XF-110 Was (1) XF-139; Removed (4) XF-152, (4) XF-205, (1) XM-8011A-DS-B, And (1) XM-8011A-DS-T; Released For Customer Approval	1/26/2023	WRC

Approval

By: _____ Date: _____

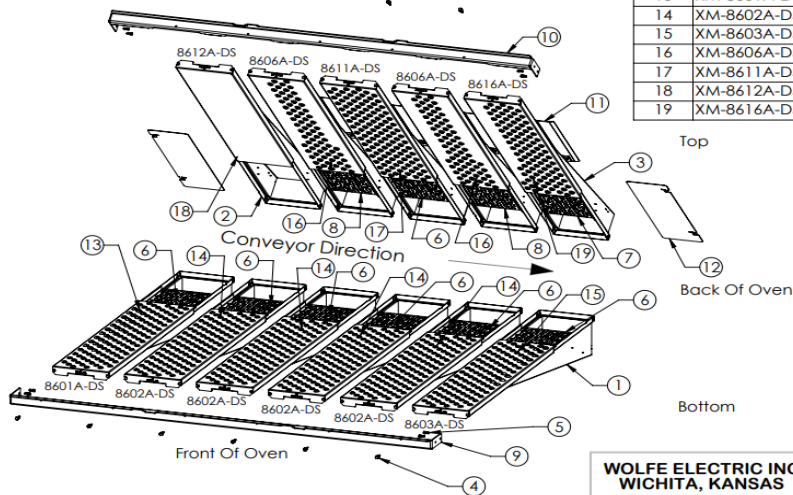

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B-PR12DS	Finger Body 32xx Bot w/Perf R	6
2	XA-8001C-32-T-DS	Finger Body 32xx Top No Ramp	1
3	XA-8001C-32-T-PR12DS	Finger Body 32xx Top w/Perf R	4
4	XF-110	1/4"-14 Thd Fmg Screw	11
5	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
6	XM-8004-8601A-DS	Finger Inner Plate Perforated	7
7	XM-8004-8605A-DS	Finger Inner Plate Perforated	1
8	XM-8004-8606A-DS	Finger Inner Plate Perforated	2
9	XM-8010D-xx65-B-DS	Finger Support Angle	1
10	XM-8010D-xx65-T-DS	Finger Support Angle	1
11	XM-8024B-xx65-DS	Return Air Plate	4
12	XM-8025B-xx65-DS	Endloss Plate	2
13	XM-8601A-DS	32xx Finger Outer Plate	1
14	XM-8602A-DS	32xx Finger Outer Plate	4
15	XM-8603A-DS	32xx Finger Outer Plate	1
16	XM-8606A-DS	32xx Finger Outer Plate	2
17	XM-8611A-DS	32xx Finger Outer Plate	1
18	XM-8612A-DS	32xx Finger Outer Plate	1
19	XM-8616A-DS	32xx Finger Outer Plate	1

Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B15-4-2	SQ	60 Hz			
B15-6-2	SQ	50 Hz			

Legend: Fan Style: B17 = 152 Style (True 1/7)
No. Of Fan Blades: 3, 4 or 6
Fan Rotation: CW = 1, CCW = 2

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION
XLT OVENS
Finger Chart Dominos

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.XX ±0.030 XXX ±0.010
ANGULAR: ±1° FRACTIONS: 1/32
DRAWN BY: JMD DATE: 7/29/2022

MATL: See BOM


XA-8H3265-Domino-LR

SHEET 1 OF 1
DO NOT SCALE

Reference	Description	Date	By
H03	(1) XA-8001C-32-T-DS Was (1) XA-8001C-32-T-PR12DS, (1) XF-110 Was (1) XF-139; Removed (4) XF-152, (4) XF-205, (1) XM-8011A-DS-B, And (1) XM-8011A-DS-T; Released For Customer Approval	1/26/2023	WRC

Approval

By: _____ Date: _____

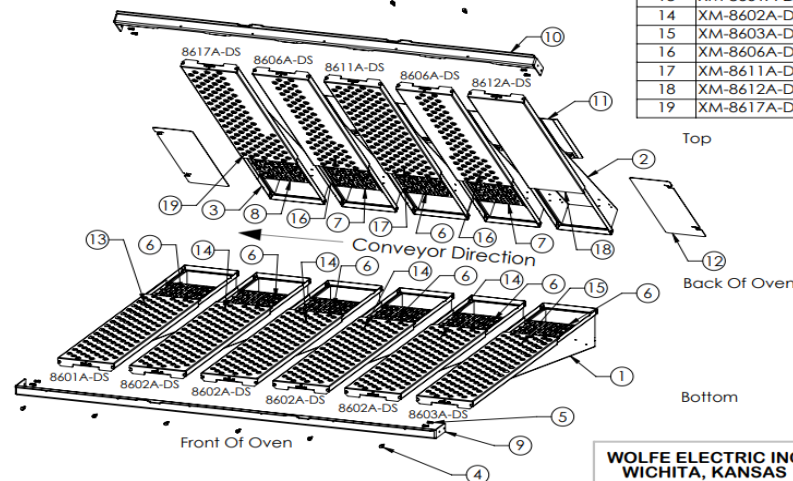

Item No.	Part No.	Description	QTY
1	XA-8001C-32-B-PR12DS	Finger Body 32xx Bot w/Perf R	6
2	XA-8001C-32-T-DS	Finger Body 32xx Top No Ramp	1
3	XA-8001C-32-T-PR12DS	Finger Body 32xx Top w/Perf R	4
4	XF-110	1/4"-14 Thd Fmg Screw	11
5	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
6	XM-8004-8601A-DS	Finger Inner Plate Perforated	7
7	XM-8004-8606A-DS	Finger Inner Plate Perforated	2
8	XM-8004-8607A-DS	Finger Inner Plate Perforated	1
9	XM-8010D-xx65-B-DS	Finger Support Angle	1
10	XM-8010D-xx65-T-DS	Finger Support Angle	1
11	XM-8024B-xx65-DS	Return Air Plate	4
12	XM-8025B-xx65-DS	Endloss Plate	2
13	XM-8601A-DS	32xx Finger Outer Plate	1
14	XM-8602A-DS	32xx Finger Outer Plate	4
15	XM-8603A-DS	32xx Finger Outer Plate	1
16	XM-8606A-DS	32xx Finger Outer Plate	2
17	XM-8611A-DS	32xx Finger Outer Plate	1
18	XM-8612A-DS	32xx Finger Outer Plate	1
19	XM-8617A-DS	32xx Finger Outer Plate	1

Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B15-4-2	SQ	60 Hz			
B15-6-2	SQ	50 Hz			

Legend: Fan Style: B17 = 152 Style (True 1/7)
No. Of Fan Blades: 3, 4 or 6
Fan Rotation: CW = 1, CCW = 2

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION
XLT OVENS
Finger Chart Dominos

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.XX ±0.030 XXX ±0.010
ANGULAR: ±1° FRACTIONS: 1/32
DRAWN BY: JMD DATE: 7/29/2022

MATL: See BOM

XA-8H3265-Domino-LR

SHEET 1 OF 1
DO NOT SCALE

Reference	Description	Date	By
H03	(1) XA-8001C-32-T-DS Was (1) XA-8001C-32-T-PR12DS, (1) XF-110 Was (1) XF-139; Removed (4) XF-152, (4) XF-205, (1) XM-8011A-DS-B, And (1) XM-8011A-DS-T; Released For Customer Approval	1/26/2023	WRC

Approval


By: _____ Date: _____

XLT 3270-S



REV.	DESCRIPTION	DATE	BY
B	CHG P/N WAS XA-8000-3270-TS3-S DO: ADD APPROVAL TEMPLATE, ECN10-351-2; XA-8001A-32-B WAS XA-8001-32-B; XA-8001A-32-T WAS XA-8001-32-T; ECR10-395	4/1/2010	DP

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B	FINGER BODY 32xx BOT NO RAMP	7
2	XA-8001A-32-T	FINGER BODY 32xx TOP NO RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	4
4	XM-8301	32xx 3 R+ VAR 7/16 FINGER OUT	10

XLT-3 -

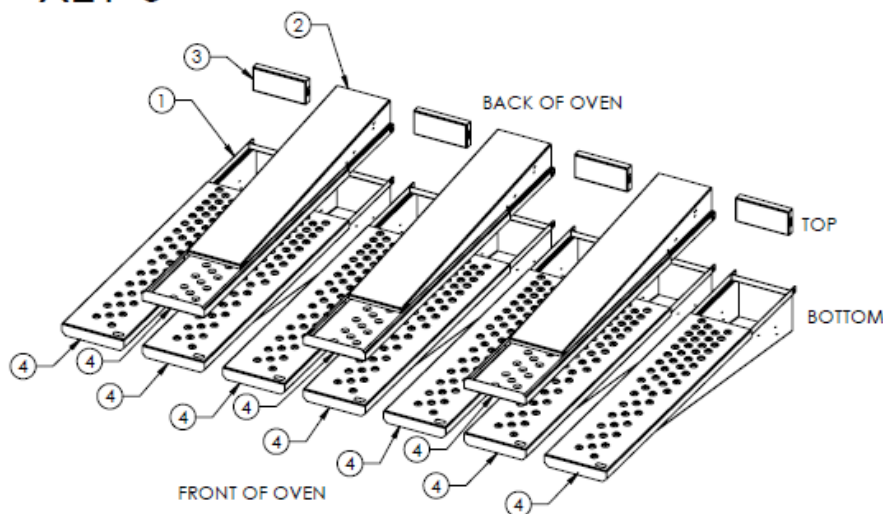

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPD.	DATE	DESIGN VALIDATION
B16-S-2-1	SQ	X		2/24/2010	PG
LEGEND: FAN STYLE: A16 = TS STYLE (16"); B16 = TS2 STYLE (TRUE 16"); C16 = TS2 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 6 OR 8; FAN ROTATION: CW = T, CCW = 2					

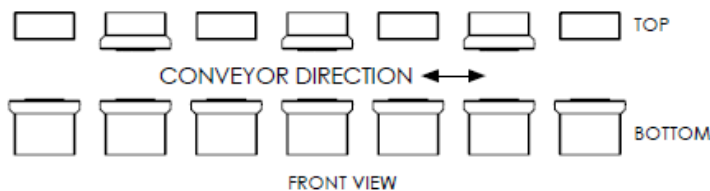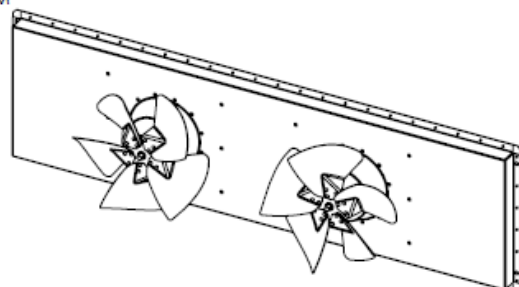

NOTES:
1. BAKE TEMP / TIME: 465°-475° F / 5:30-6:00 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON EACH IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 108.508

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.00 ±0.003 .000 ±0.010
ANGULAR: ±1° FRACTIONS: 1/32
DRAWN BY DP DATE 9/11/2001

DESCRIPTION

XLT OVENS
Domino's FINGER CHART STANDARD

MATL. SEE BOM

DWG

XA-8-3270-Domino-S


SHEET 1 OF 1
DO NOT SCALE

XLT 3270A

REV.	DESCRIPTION	DATE	BY
A	APPROVED BY PETE GOODMAN	9/20/2010	SMW

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-32-B	FINGER BODY 32xx BOT NO RAMP	7
2	XA-8001A-32-T	FINGER BODY 32xx TOP NO RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	4
4	XM-8301	32xx FINGER OUTER PLATE	10

XLT-3

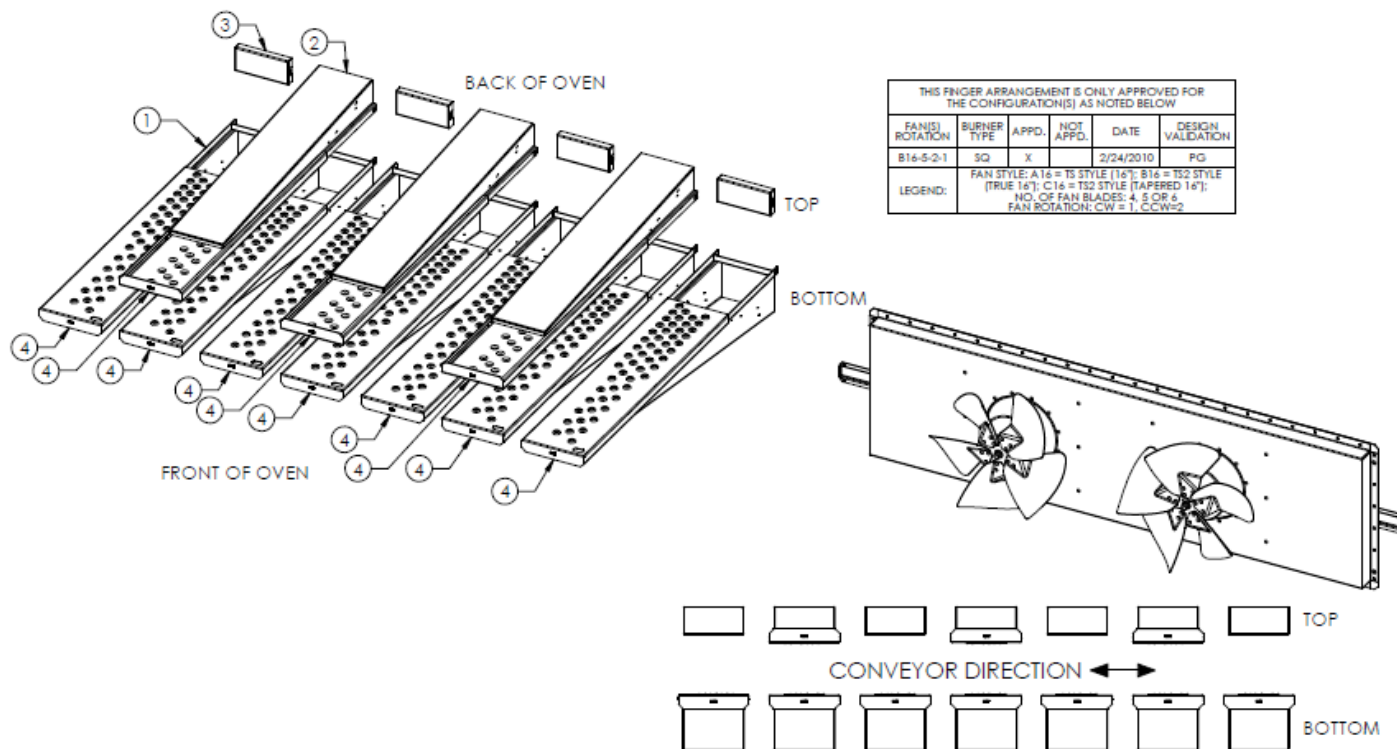

NOTES:

1. BAKE TEMP / TIME: 465°-475° F / 5:30-6:00 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW) ☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC. IS PROHIBITED.

SIGNATURE ON ECH & APPROVAL OF RELEASE OR CHANGE

WEIGHT 108.53

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
 DECIMALS: X.XX ±0.000 .XXX ±0.010
 ANGULAR: ±1° FRACTIONS: 1/32
 DRAWN BY: SMW DATE: 9/20/2010

DESCRIPTION

XLT OVENS
 Domino's FINGER CHART STANDARD

MATL SEE BOM

DWG

XA-8A3270-Domino-S


SHEET 1 OF 1
 (DO NOT SCALE)

XLT 3270E1B




FCN	DESCRIPTION	DATE	BY
493	Added XM-8013-S, Finger Retainer Clip	11/27/2013	CDS

ITEM NO.	PART NO.	DESCRIPTION	QTY
1	XA-8001B-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001B-32-T-PR-105	Finger Body 32xx Top w/Perf R	4
3	XM-8009-S	Finger Block Off Snap	3
4	XM-8013-S	Finger Retainer Clip	4
5	XM-8616D	32xx Finger Outer Plate	11

XLT-3

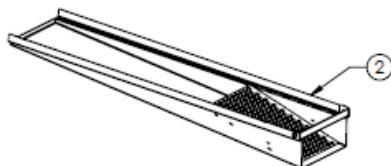

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW						
FAN(S) ROTATION	BURNER TYPE	POWER SUPPLY	APPL.	NOT APPL.	DATE	DESIGN VALIDATION
B16-6-2	SQ	60 HZ	X		10/22/2013	JS
LEGEND: FAN STYLE: A16 = T5 STYLE (16"); B16 = T52 STYLE (TRUE 16"); C16 = T52 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6; FAN ROTATION: CW = 1, CCW = 2						

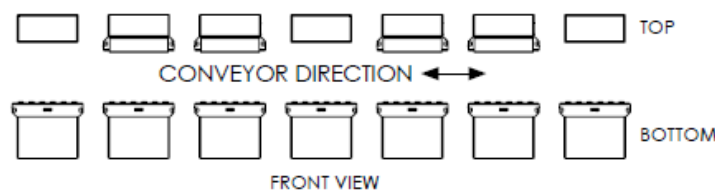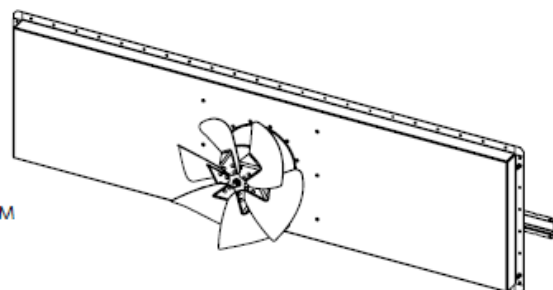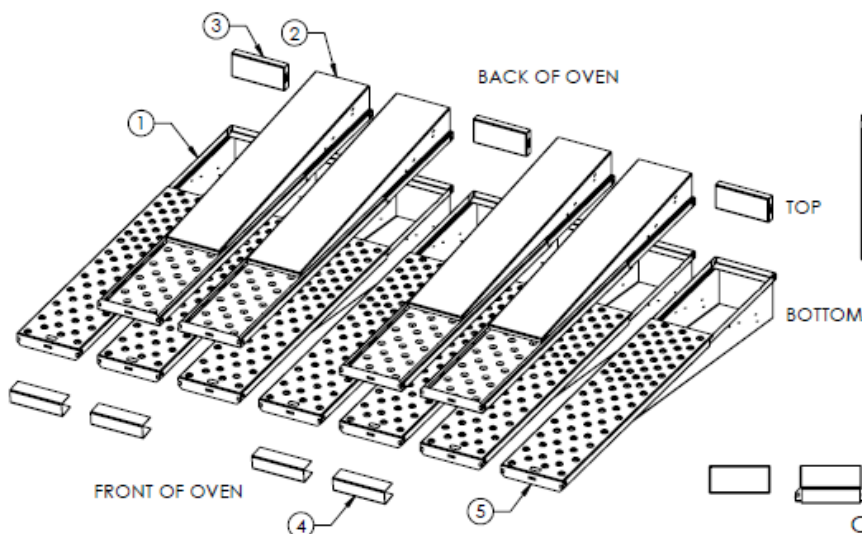

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC, INC. IS PROHIBITED.

SIGNATURE ON ECH IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 123.52

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.00 ±0.000 .000 ±0.010
ANGULAR: ±1° FRACTIONS: 1/32
DRAWN BY CDS DATE 10/10/2013

DESCRIPTION

XLT OVENS
Finger Chart Domino Std C-1B

MATL See BOM

DWG XA-8E3270-Domino-S-C

SHEET 1 OF 1

DO NOT SCALE





XLT 3270E2B

ECN	Description	Date	By
--	Customer Approved	4/27/2015	SM

Item No.	Part No.	Description	Qty
1	XA-8001B-32-B-PR-105	Finger Body 32xx Bot w/Perf R	7
2	XA-8001B-32-T-PR-105	Finger Body 32xx Top w/Perf R	4
3	XM-8009-S	Finger Block Off Snap	3
4	XM-8013-S	Finger Retainer Clip	4
5	XM-8558D	32xx Finger Outer Plate	11



XLT-3

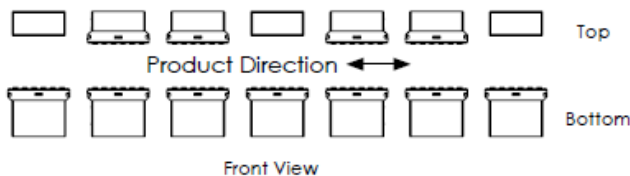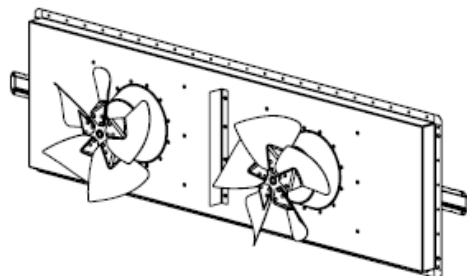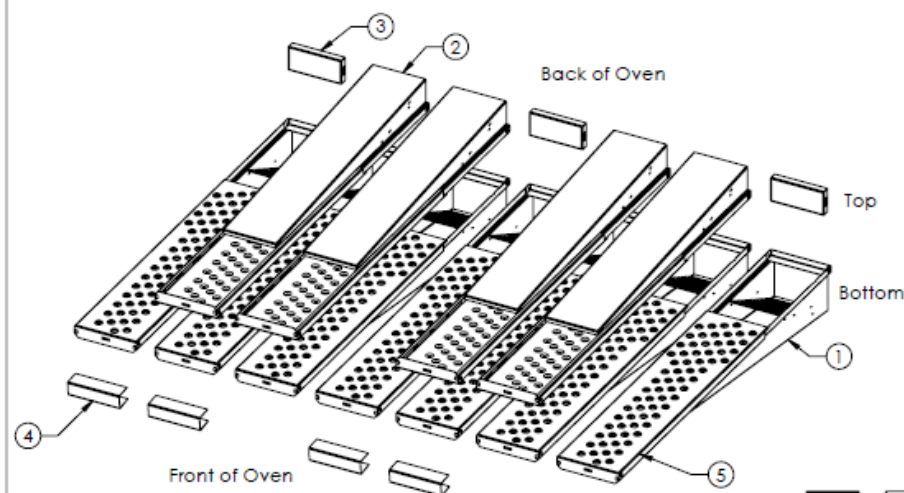

WOLFE ELECTRIC INC WICHITA, KANSAS	DESCRIPTION XLT OVENS Finger Chart Domino Std D-2B	MATL See BOM	SHEET 1 OF 2 DO NOT SCALE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES & TOLERANCES ARE: DECIMALS: .XXX ±.000 .XXX ±.010 ANGULAR: ±1° FRACTIONS: ±1/32	DWG XA-8E3270-Domino-S-D	DATE 4/27/2015	
DRAWN BY SM			

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECR IS
APPROVAL OF
RELEASE OR CHANGE.

127.48

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ± 0.030 .XXX ± 0.010
ANGULAR: $\pm 1^\circ$ FRACTIONS: $\pm 1/32$

MATL	See BOM
DWG	Y A

XLT OVENS
Finger Chart Domino Std D-2B

XA-8E3270-Domino-S-D

SHEET 1 OF 2
DO NOT SCALE

DO NOT SCALE


XLT 3270F

FCN	Description	Date	By
663	XM-80248-xx70 Was XM-80248-3270: XM-80258-xx70 Was XM-80258-3270	5/25/2016	RWP

Approval

By: _____ Date: _____

XLT-3

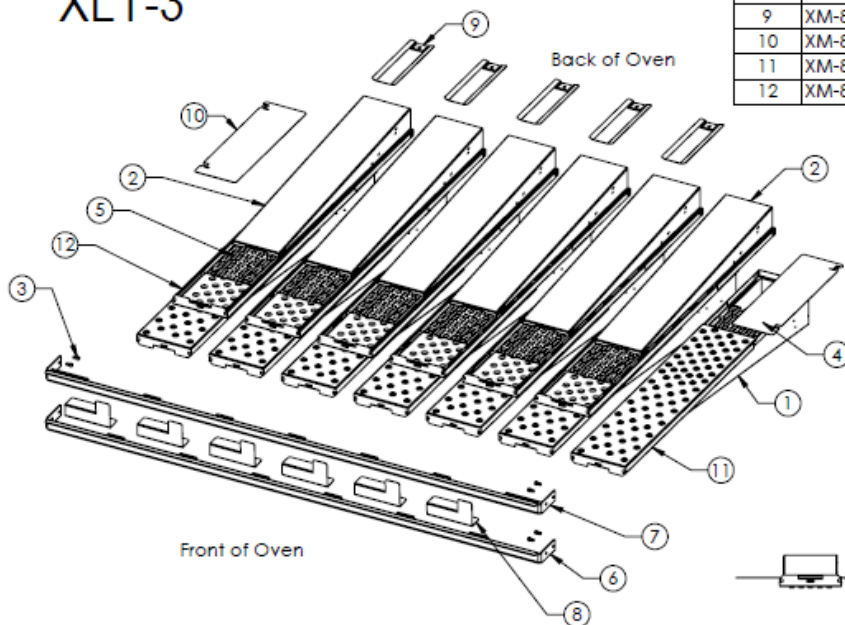


Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T-P1-105	Finger Body 32xx Top w/Perf R	6
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8616E	Finger Inner Plate Perforated	7
5	XM-8004-8679E	Finger Inner Plate Perforated	6
6	XM-8010C-xx70-B	Finger Support Angle	1
7	XM-8010C-xx70-T	Finger Support Angle	1
8	XM-8013-S	Finger Retainer Clip	6
9	XM-80248-xx70	Return Air Plate	5
10	XM-80258-xx70	Endloss Plate	2
11	XM-8616E	32xx Finger Outer Plate	7
12	XM-8679E	32xx Finger Outer Plate	6

This Finger Chart is Only Approved for The Configuration(s) as Noted Below						
Fan(s) Rotation	Burner Type	Power Supply	Appld.	No. Reply	Date	Design Validation
B15-e-1-2	SQ	60 HZ				
Legend: Fan Style: B15 = 102 Style (True 1.5 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2						

Top

Bottom

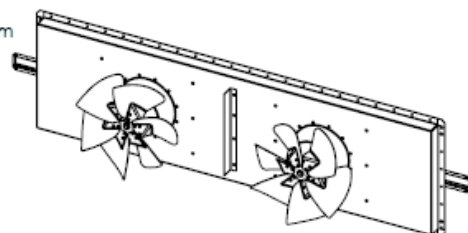

Front View

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS

Finger Chart Dominos Std E-2B

MATL. see BOM

DRWG

XA-8F3270-Domino-S-E

SHEET 1 OF 1
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE.

WEIGHT


201.67

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .000, .0000 .001, .0010
ANGULAR: ±1° FRACTIONS: 1/32
DRAWN BY: CJB DATE: 8/4/2015

XLT 3270G

FCN	Description	Date	By
663	XM-8013A-S Was XM-8013-S; XM-8025B-3240-xx70 Was XM-8025B-xx70; Added (7) XM-8013A-S; Customer Approved	4/22/2019	BNM

XLT-3


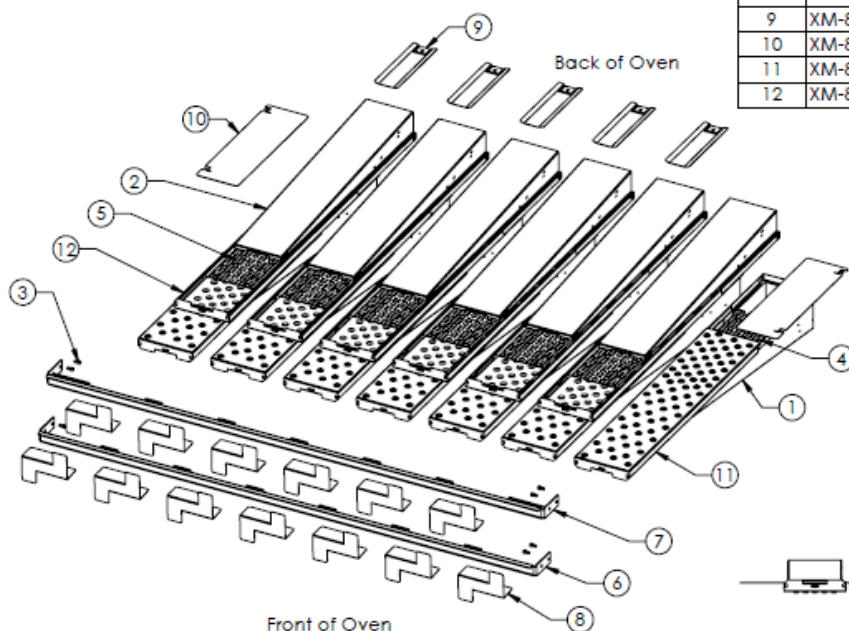


Item No.	Part No.	Description	QTY
1	XA-8001C-32-B	Finger Body 32xx Bot No Ramp	7
2	XA-8001C-32-T-P1-105	Finger Body 32xx Top w/Perf R	6
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8616E	Finger Inner Plate Perforated	7
5	XM-8004-8679E	Finger Inner Plate Perforated	6
6	XM-8010C-xx70-B	Finger Support Angle	1
7	XM-8010C-xx70-T	Finger Support Angle	1
8	XM-8013A-S	Finger Retainer Clip	13
9	XM-8024B-xx70	Return Air Plate	5
10	XM-8025B-3240-xx70	Endloss Plate	2
11	XM-8616E	32xx Finger Outer Plate	7
12	XM-8679E	32xx Finger Outer Plate	6

This Finger Chart is Only Approved for The Configuration(s) as Noted Below						
Fan(s) Rotation	Burner Type	Power Supply	Appd.	No Reply	Date	Design Validation
B15-6-1-2	SQ	60 HZ	X		4/18/2019	Cheyenne Ridge
Legend: Fan Style: B15 = 152 Style (True 15 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2						

Top

Bottom

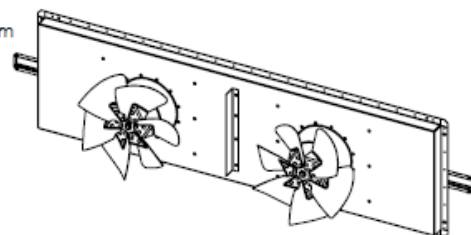

Front View

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS

Finger Chart Dominos Std E-2B

MATL

See BOM

DWG

XA-8G3270-Domino-S-E

SHEET 1 OF 2
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC. IS PROHIBITED.

SIGNATURE ON ECN &
APPROVAL OF
RELEASE OR CHANGE:

WEIGHT


204.97

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: 1/16, 1/32, 1/64, 3/32, 1/2, 5/8, 3/4, 7/8, 1, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 2 3/4, 3, 3 1/4, 3 1/2, 3 3/4, 4, 4 1/4, 4 1/2, 4 3/4, 5, 5 1/4, 5 1/2, 5 3/4, 6, 6 1/4, 6 1/2, 6 3/4, 7, 7 1/4, 7 1/2, 7 3/4, 8, 8 1/4, 8 1/2, 8 3/4, 9, 9 1/4, 9 1/2, 9 3/4, 10, 10 1/4, 10 1/2, 10 3/4, 11, 11 1/4, 11 1/2, 11 3/4, 12, 12 1/4, 12 1/2, 12 3/4, 13, 13 1/4, 13 1/2, 13 3/4, 14, 14 1/4, 14 1/2, 14 3/4, 15, 15 1/4, 15 1/2, 15 3/4, 16, 16 1/4, 16 1/2, 16 3/4, 17, 17 1/4, 17 1/2, 17 3/4, 18, 18 1/4, 18 1/2, 18 3/4, 19, 19 1/4, 19 1/2, 19 3/4, 20, 20 1/4, 20 1/2, 20 3/4, 21, 21 1/4, 21 1/2, 21 3/4, 22, 22 1/4, 22 1/2, 22 3/4, 23, 23 1/4, 23 1/2, 23 3/4, 24, 24 1/4, 24 1/2, 24 3/4, 25, 25 1/4, 25 1/2, 25 3/4, 26, 26 1/4, 26 1/2, 26 3/4, 27, 27 1/4, 27 1/2, 27 3/4, 28, 28 1/4, 28 1/2, 28 3/4, 29, 29 1/4, 29 1/2, 29 3/4, 30, 30 1/4, 30 1/2, 30 3/4, 31, 31 1/4, 31 1/2, 31 3/4, 32, 32 1/4, 32 1/2, 32 3/4, 33, 33 1/4, 33 1/2, 33 3/4, 34, 34 1/4, 34 1/2, 34 3/4, 35, 35 1/4, 35 1/2, 35 3/4, 36, 36 1/4, 36 1/2, 36 3/4, 37, 37 1/4, 37 1/2, 37 3/4, 38, 38 1/4, 38 1/2, 38 3/4, 39, 39 1/4, 39 1/2, 39 3/4, 40, 40 1/4, 40 1/2, 40 3/4, 41, 41 1/4, 41 1/2, 41 3/4, 42, 42 1/4, 42 1/2, 42 3/4, 43, 43 1/4, 43 1/2, 43 3/4, 44, 44 1/4, 44 1/2, 44 3/4, 45, 45 1/4, 45 1/2, 45 3/4, 46, 46 1/4, 46 1/2, 46 3/4, 47, 47 1/4, 47 1/2, 47 3/4, 48, 48 1/4, 48 1/2, 48 3/4, 49, 49 1/4, 49 1/2, 49 3/4, 50, 50 1/4, 50 1/2, 50 3/4, 51, 51 1/4, 51 1/2, 51 3/4, 52, 52 1/4, 52 1/2, 52 3/4, 53, 53 1/4, 53 1/2, 53 3/4, 54, 54 1/4, 54 1/2, 54 3/4, 55, 55 1/4, 55 1/2, 55 3/4, 56, 56 1/4, 56 1/2, 56 3/4, 57, 57 1/4, 57 1/2, 57 3/4, 58, 58 1/4, 58 1/2, 58 3/4, 59, 59 1/4, 59 1/2, 59 3/4, 60, 60 1/4, 60 1/2, 60 3/4, 61, 61 1/4, 61 1/2, 61 3/4, 62, 62 1/4, 62 1/2, 62 3/4, 63, 63 1/4, 63 1/2, 63 3/4, 64, 64 1/4, 64 1/2, 64 3/4, 65, 65 1/4, 65 1/2, 65 3/4, 66, 66 1/4, 66 1/2, 66 3/4, 67, 67 1/4, 67 1/2, 67 3/4, 68, 68 1/4, 68 1/2, 68 3/4, 69, 69 1/4, 69 1/2, 69 3/4, 70, 70 1/4, 70 1/2, 70 3/4, 71, 71 1/4, 71 1/2, 71 3/4, 72, 72 1/4, 72 1/2, 72 3/4, 73, 73 1/4, 73 1/2, 73 3/4, 74, 74 1/4, 74 1/2, 74 3/4, 75, 75 1/4, 75 1/2, 75 3/4, 76, 76 1/4, 76 1/2, 76 3/4, 77, 77 1/4, 77 1/2, 77 3/4, 78, 78 1/4, 78 1/2, 78 3/4, 79, 79 1/4, 79 1/2, 79 3/4, 80, 80 1/4, 80 1/2, 80 3/4, 81, 81 1/4, 81 1/2, 81 3/4, 82, 82 1/4, 82 1/2, 82 3/4, 83, 83 1/4, 83 1/2, 83 3/4, 84, 84 1/4, 84 1/2, 84 3/4, 85, 85 1/4, 85 1/2, 85 3/4, 86, 86 1/4, 86 1/2, 86 3/4, 87, 87 1/4, 87 1/2, 87 3/4, 88, 88 1/4, 88 1/2, 88 3/4, 89, 89 1/4, 89 1/2, 89 3/4, 90, 90 1/4, 90 1/2, 90 3/4, 91, 91 1/4, 91 1/2, 91 3/4, 92, 92 1/4, 92 1/2, 92 3/4, 93, 93 1/4, 93 1/2, 93 3/4, 94, 94 1/4, 94 1/2, 94 3/4, 95, 95 1/4, 95 1/2, 95 3/4, 96, 96 1/4, 96 1/2, 96 3/4, 97, 97 1/4, 97 1/2, 97 3/4, 98, 98 1/4, 98 1/2, 98 3/4, 99, 99 1/4, 99 1/2, 99 3/4, 100, 100 1/4, 100 1/2, 100 3/4, 101, 101 1/4, 101 1/2, 101 3/4, 102, 102 1/4, 102 1/2, 102 3/4, 103, 103 1/4, 103 1/2, 103 3/4, 104, 104 1/4, 104 1/2, 104 3/4, 105, 105 1/4, 105 1/2, 105 3/4, 106, 106 1/4, 106 1/2, 106 3/4, 107, 107 1/4, 107 1/2, 107 3/4, 108, 108 1/4, 108 1/2, 108 3/4, 109, 109 1/4, 109 1/2, 109 3/4, 110, 110 1/4, 110 1/2, 110 3/4, 111, 111 1/4, 111 1/2, 111 3/4, 112, 112 1/4, 112 1/2, 112 3/4, 113, 113 1/4, 113 1/2, 113 3/4, 114, 114 1/4, 114 1/2, 114 3/4, 115, 115 1/4, 115 1/2, 115 3/4, 116, 116 1/4, 116 1/2, 116 3/4, 117, 117 1/4, 117 1/2, 117 3/4, 118, 118 1/4, 118 1/2, 118 3/4, 119, 119 1/4, 119 1/2, 119 3/4, 120, 120 1/4, 120 1/2, 120 3/4, 121, 121 1/4, 121 1/2, 121 3/4, 122, 122 1/4, 122 1/2, 122 3/4, 123, 123 1/4, 123 1/2, 123 3/4, 124, 124 1/4, 124 1/2, 124 3/4, 125, 125 1/4, 125 1/2, 125 3/4, 126, 126 1/4, 126 1/2, 126 3/4, 127, 127 1/4, 127 1/2, 127 3/4, 128, 128 1/4, 128 1/2, 128 3/4, 129, 129 1/4, 129 1/2, 129 3/4, 130, 130 1/4, 130 1/2, 130 3/4, 131, 131 1/4, 131 1/2, 131 3/4, 132, 132 1/4, 132 1/2, 132 3/4, 133, 133 1/4, 133 1/2, 133 3/4, 134, 134 1/4, 134 1/2, 134 3/4, 135, 135 1/4, 135 1/2, 135 3/4, 136, 136 1/4, 136 1/2, 136 3/4, 137, 137 1/4, 137 1/2, 137 3/4, 138, 138 1/4, 138 1/2, 138 3/4, 139, 139 1/4, 139 1/2, 139 3/4, 140, 140 1/4, 140 1/2, 140 3/4, 141, 141 1/4, 141 1/2, 141 3/4, 142, 142 1/4, 142 1/2, 142 3/4, 143, 143 1/4, 143 1/2, 143 3/4, 144, 144 1/4, 144 1/2, 144 3/4, 145, 145 1/4, 145 1/2, 145 3/4, 146, 146 1/4, 146 1/2, 146 3/4, 147, 147 1/4, 147 1/2, 147 3/4, 148, 148 1/4, 148 1/2, 148 3/4, 149, 149 1/4, 149 1/2, 149 3/4, 150, 150 1/4, 150 1/2, 150 3/4, 151, 151 1/4, 151 1/2, 151 3/4, 152, 152 1/4, 152 1/2, 152 3/4, 153, 153 1/4, 153 1/2, 153 3/4, 154, 154 1/4, 154 1/2, 154 3/4, 155, 155 1/4, 155 1/2, 155 3/4, 156, 156 1/4, 156 1/2, 156 3/4, 157, 157 1/4, 157 1/2, 157 3/4, 158, 158 1/4, 158 1/2, 158 3/4, 159, 159 1/4, 159 1/2, 159 3/4, 160, 160 1/4, 160 1/2, 160 3/4, 161, 161 1/4, 161 1/2, 161 3/4, 162, 162 1/4, 162 1/2, 162 3/4, 163, 163 1/4, 163 1/2, 163 3/4, 164, 164 1/4, 164 1/2, 164 3/4, 165, 165 1/4, 165 1/2, 165 3/4, 166, 166 1/4, 166 1/2, 166 3/4, 167, 167 1/4, 167 1/2, 167 3/4, 168, 168 1/4, 168 1/2, 168 3/4, 169, 169 1/4, 169 1/2, 169 3/4, 170, 170 1/4, 170 1/2, 170 3/4, 171, 171 1/4, 171 1/2, 171 3/4, 172, 172 1/4, 172 1/2, 172 3/4, 173, 173 1/4, 173 1/2, 173 3/4, 174, 174 1/4, 174 1/2, 174 3/4, 175, 175 1/4, 175 1/2, 175 3/4, 176, 176 1/4, 176 1/2, 176 3/4, 177, 177 1/4, 177 1/2, 177 3/4, 178, 178 1/4, 178 1/2, 178 3/4, 179, 179 1/4, 179 1/2, 179 3/4, 180, 180 1/4, 180 1/2, 180 3/4, 181, 181 1/4, 181 1/2, 181 3/4, 182, 182 1/4, 182 1/2, 182 3/4, 183, 183 1/4, 183 1/2, 183 3/4, 184, 184 1/4, 184 1/2, 184 3/4, 185, 185 1/4, 185 1/2, 185 3/4, 186, 186 1/4, 186 1/2, 186 3/4, 187, 187 1/4, 187 1/2, 187 3/4, 188, 188 1/4, 188 1/2, 188 3/4, 189, 189 1/4, 189 1/2, 189 3/4, 190, 190 1/4, 190 1/2, 190 3/4, 191, 191 1/4, 191 1/2, 191 3/4, 192, 192 1/4, 192 1/2, 192 3/4, 193, 193 1/4, 193 1/2, 193 3/4, 194, 194 1/4, 194 1/2, 194 3/4, 195, 195 1/4, 195 1/2, 195 3/4, 196, 196 1/4, 196 1/2, 196 3/4, 197, 197 1/4, 197 1/2, 197 3/4, 198, 198 1/4, 198 1/2, 198 3/4, 199, 199 1/4, 199 1/2, 199 3/4, 200, 200 1/4, 200 1/2, 200 3/4, 201, 201 1/4, 201 1/2, 201 3/4, 202, 202 1/4, 202 1/2, 202 3/4, 203, 203 1/4, 203 1/2, 203 3/4, 204, 204 1/4, 204 1/2, 204 3/4, 205, 205 1/4, 205 1/2, 205 3/4, 206, 206 1/4, 206 1/2, 206 3/4, 207, 207 1/4, 207 1/2, 207 3/4, 208, 208 1/4, 208 1/2, 208 3/4, 209, 209 1/4, 209 1/2, 209 3/4, 210, 210 1/4, 210 1/2, 210 3/4, 211, 211 1/4, 211 1/2, 211 3/4, 212, 212 1/4, 212 1/2, 212 3/4, 213, 213 1/4, 213 1/2, 213 3/4, 214, 214 1/4, 214 1/2, 214 3/4, 215, 215 1/4, 215 1/2, 215 3/4, 216, 216 1/4, 216 1/2, 216 3/4, 217, 217 1/4, 217 1/2, 217 3/4, 218, 218 1/4, 218 1/2, 218 3/4, 219, 219 1/4, 219 1/2, 219 3/4, 220, 220 1/4, 220 1/2, 220 3/4, 221, 221 1/4, 221 1/2, 221 3/4, 222, 222 1/4, 222 1/2, 222 3/4, 223, 223 1/4, 223 1/2, 223 3/4, 224, 224 1/4, 224 1/2, 224 3/4, 225, 225 1/4, 225 1/2, 225 3/4, 226, 226 1/4, 226 1/2, 226 3/4, 227, 227 1/4, 227 1/2, 227 3/4, 228, 228 1/4, 228 1/2, 228 3/4, 229, 229 1/4, 229 1/2, 229 3/4, 230, 230 1/4, 230 1/2, 230 3/4, 231, 231 1/4, 231 1/2, 231 3/4, 232, 232 1/4, 232 1/2, 232 3/4, 233, 233 1/4, 233 1/2, 233 3/4, 234, 234 1/4, 234 1/2, 234 3/4, 235, 235 1/4, 235 1/2, 235 3/4, 236, 236 1/4, 236 1/2, 236 3/4, 237, 237 1/4, 237 1/2, 237 3/4, 238, 238 1/4, 238 1/2, 238 3/4, 239, 239 1/4, 239 1/2, 239 3/4, 240, 240 1/4, 240 1/2, 240 3/4, 241, 241 1/4, 241 1/2, 241 3/4, 242, 242 1/4, 242 1/2, 242 3/4, 243, 243 1/4, 243 1/2, 243 3/4, 244, 244 1/4, 244 1/2, 244 3/4, 245, 245 1/4, 245 1/2, 245 3/4, 246, 246 1/4, 246 1/2, 246 3/4, 247, 247 1/4, 247 1/2, 247 3/4, 248, 248 1/4, 248 1/2, 248 3/4, 249, 249 1/4, 249 1/2, 249 3/4, 250, 250 1/4, 250 1/2, 250 3/4, 251, 251 1/4, 251 1/2, 251 3/4, 252, 252 1/4, 252 1/2, 252 3/4, 253, 253 1/4, 253 1/2, 253 3/4, 254, 254 1/4, 254 1/2, 254 3/4, 255, 255 1/4, 255 1/2, 255 3/4, 256, 256 1/4, 256 1/2, 256 3/4, 257, 257 1/4, 257 1/2, 257 3/4, 258, 258 1/4, 258 1/2, 258 3/4, 259, 259 1/4, 259 1/2, 259 3/4, 260, 260 1/4, 260 1/2, 260 3/4, 261, 261 1/4, 261 1/2, 261 3/4, 262, 262 1/4, 262 1/2, 262 3/4, 263, 263 1/4, 263 1/2, 263 3/4, 264, 264 1/4, 264 1/2, 264 3/4, 265, 265 1/4, 265 1/2, 265 3/4, 266, 266 1/4, 266 1/2, 266 3/4, 267, 267 1/4, 267 1/2, 267 3/4, 268, 268 1/4, 268 1/2, 268 3/4, 269, 269 1/4, 269 1/2, 269 3/4, 270, 270 1/4, 270 1/2, 270 3/4, 271, 271 1/4, 271 1/2, 271 3/4, 272, 272 1/4, 272 1/2, 272 3/4, 273, 273 1/4, 273 1/2, 273 3/4, 274, 274 1/4, 274 1/2, 274 3/4, 275, 275 1/4, 275 1/2, 275 3/4, 276, 276 1/4, 276 1/2, 276 3/4, 277, 277 1/4, 277 1/2, 277 3/4, 278, 278 1/4, 278 1/2, 278 3/4, 279, 279 1/4, 279 1/2, 279 3/4, 280, 280 1/4, 280 1/2, 280 3/4, 281, 281 1/4, 281 1/2, 281 3/4, 282, 282 1/4, 282 1/2, 282 3/4, 283, 283 1/4, 283 1/2, 283 3/4, 284, 284 1/4, 284 1/2, 284 3/4, 285, 285 1/4, 285 1/2, 285 3/4, 286, 286 1/4, 286 1/2, 286 3/4, 287, 287 1/4, 287 1/2, 287 3/4, 288, 288 1/4, 288 1/2, 288 3/4, 289, 289 1/4, 289 1/2, 289 3/4, 290, 290 1/4, 290 1/2, 290 3/4, 291, 291 1/4, 291 1/2, 291 3/4, 292, 292 1/4, 292 1/2, 292 3/4, 293, 293 1/4, 293 1/2, 293 3/4, 294, 294 1/4, 294 1/2, 294 3/4, 295, 295 1/4, 295 1/2, 295 3/4, 296, 296 1/4, 296 1/2, 296 3/4, 297, 297 1/4, 297 1/2, 297 3/4, 298, 298 1/4, 298 1/2, 298 3/4, 299, 299 1/4, 299 1/2, 299 3/4, 300, 300 1/4, 300 1/2, 300 3/4, 301, 301 1/4, 301 1/2, 301 3/4, 302, 302 1/4, 302 1/2, 302 3/4, 303, 303 1/4, 303 1/2, 303 3/4, 304, 304 1/4, 304 1/2, 304 3/4, 305, 305 1/4, 305 1/2, 305 3/4, 306, 306 1/4, 306 1/2, 306 3/4, 307, 307 1/4, 307 1/2, 307 3/4, 308, 308 1/4, 308 1/2, 308 3/4, 309, 309 1/4, 309 1/2, 309 3/4, 310, 310 1/4, 310 1/2, 310 3/4, 311, 311 1/4, 311 1/2, 311 3/4, 312, 312 1/4, 312 1/2, 312 3/4, 313, 313 1/4, 313 1/2, 313 3/4, 314, 314 1/4, 314 1/2, 314 3/4, 315, 315 1/4, 315 1/2, 315 3/4, 316, 316 1/4, 316 1/2, 316 3/4, 317, 317 1/4, 317 1/2, 317 3/4, 318, 318 1/4, 318 1/2, 318 3/4, 319, 319 1/4, 319 1/2, 319 3/4, 320, 320 1/4, 320 1/2, 320 3/4, 321, 321 1/4, 321 1/2, 321 3/4, 322, 322 1/4, 322 1/2, 322 3/4, 323, 323 1/4, 323 1/2, 323 3/4, 324, 324 1/4, 324 1/2, 324 3/4, 325, 325 1/4, 325 1/2, 325 3/4, 326, 326 1/4, 326 1/2, 326 3/4, 327, 327 1/4, 327 1/2, 327 3/4, 328, 328 1/4, 328 1/2, 328 3/4,



XLT 3855 A

REV.	DESCRIPTION	DATE	BY
A	APPROVED BY PETE GOODMAN	9/21/2010	SMW

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-38-T-PR	FINGER BODY 38 TOP W/PERF RAMP	3
2	XA-8001A-38-B-PR	FINGER BODY 38 BOT w/PERF RAMP	5
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8681C	38xx FINGER OUTER PLATE	8

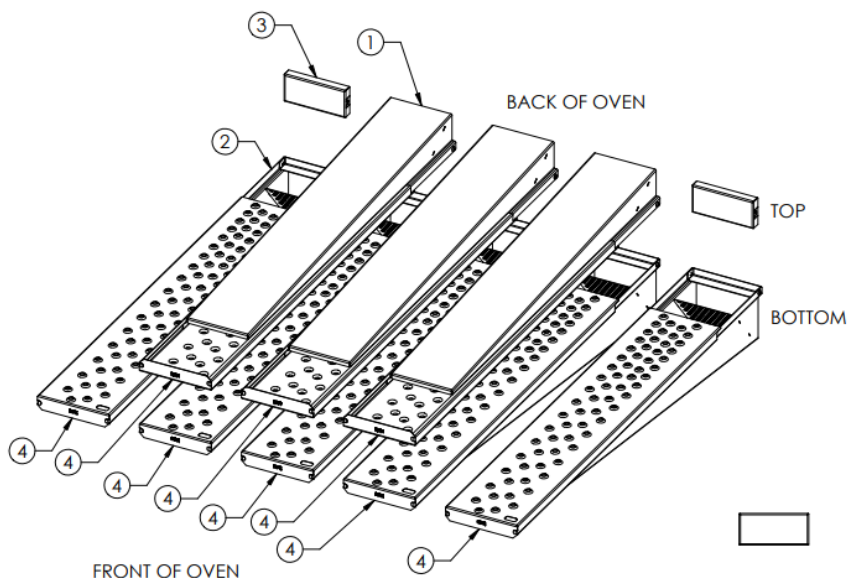

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPD.	DATE	DESIGN VALIDATION
B16-S-2	SQ	X		3/25/2010	PG
LEGEND: FAN STYLE: A16 = TS STYLE (16"); B16 = TS2 STYLE (TRUE 16"); C16 = TS2 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6; FAN ROTATION: CW = 1, CCW=2					

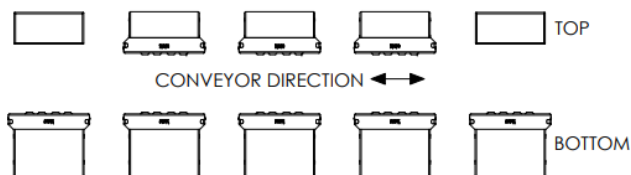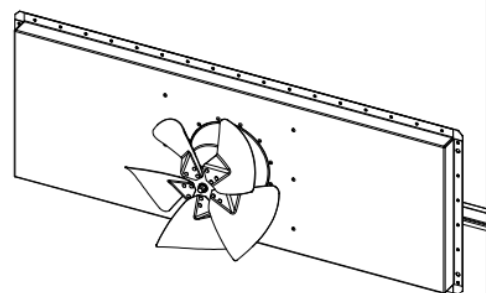

NOTES:
1. BAKE TEMP / TIME: 475° F / 6:00 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC. IS PROHIBITED.

SIGNATURE ON ECH IS APPROVAL OF RELEASE OR CHANGE.

WEIGHT 104.14

**WOLFE ELECTRIC INC
WICHITA, KANSAS**

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY: SMW DATE: 9/21/2010

DESCRIPTION
XLT OVENS
Domino's FINGER CHART STANDARD

MATL SEE BOM


DWG XA-8A3855-Domino-S

SHEET 1 OF 1
DO NOT SCALE


XLT 3855 G

FCN	Description	Date	By
716	XM-8013A-S Was XM-8013-S; Added (5) XM-8013A-S; Customer Approved	1/8/2018	JLH

Item No.	Part No.	Description	QTY
1	XA-8001C-38-B	Finger Body 38xx Bot No Ramp	5
2	XA-8001C-38-T-PR	Finger Body 38xx Top w/Perf R	4
3	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
4	XM-8004-8402E	Finger Inner Plate Perforated	9
5	XM-8010C-xx55-B	Finger Support Angle	1
6	XM-8010C-xx55-T	Finger Support Angle	1
7	XM-8013A-S	Finger Retainer Clip	9
8	XM-8024B-xx55	Return Air Plate	3
9	XM-8025B-xx55	Endloss Plate	2
10	XM-8402E	38xx Finger Outer Plate	9

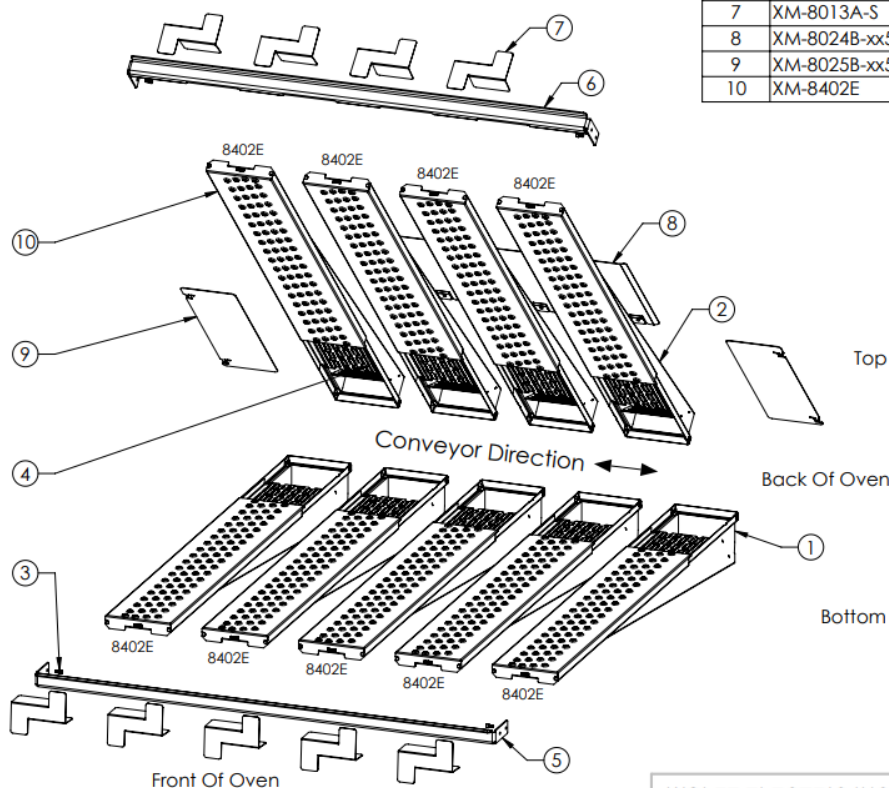

This Finger Chart is Only Approved For The Configuration(s) As Noted Below						
Fan(s) Rotation	Burner Type	Power Supply	Appl.	No Reply	Date	Design Validation
B15-6-2	SQ	60 HZ	X		1/8/2018	Jason Bobbitt
Legend: Fan Style: B15 = 1S2 Style (True 15 3/8") NO. of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2						

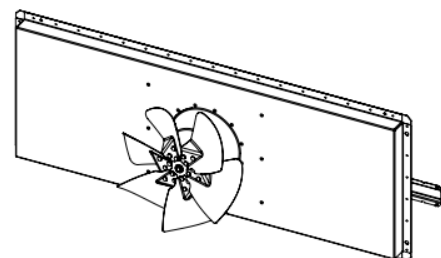

WOLFE ELECTRIC INC
WICHITA, KANSAS

DESCRIPTION

XLT OVENS
Finger Chart Dominos

MATL See BOM

DWG

XA-8G3855-Domino-S

SHEET 1 OF 2
DO NOT SCALE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: XX.XX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY SM DATE 4/7/2016

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT 165.24


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

XLT 3855-S



REV.	DESCRIPTION	DATE	BY
C	CHG P/N WAS XA-8-3855-TS-5-DOM; ADD APPROVAL TEMPLATE, ECN10-351-2; XM-8681 FINGER OUTERS WERE XM-8401, ECN10-373; XA-8001A-38-T-PR WAS XA-8001-38-T-PR & XA-8001A-38-B-PR WAS XA-8001-38-B-PR, ECN10-395.	3/23/2010	DP

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-38-B-PR	FINGER BODY 38 BOT W/PERF RAMP	5
2	XA-8001A-38-T-PR	FINGER BODY 38 TOP W/PERF RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8681	38EX 4R OFFSET 7/16 FINGER OUT	8

XLT-3855-

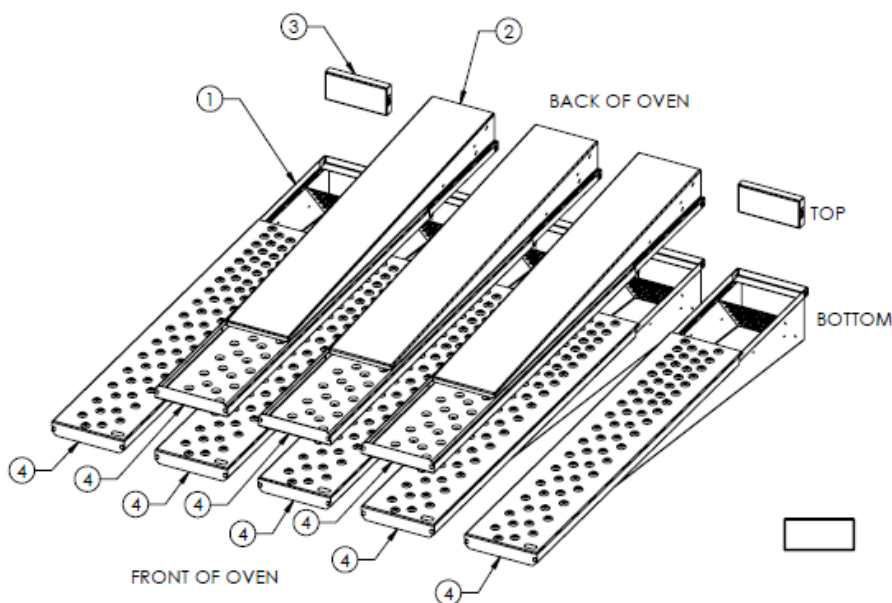

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPD.	DATE	DESIGN VALIDATION
B16-S-2	SQ	X		3/25/2010	PG
LEGEND: FAN STYLE: A16 = TS STYLE (16"); B16 = TS2 STYLE (TRUE 14"); C16 = TS2 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6; FAN ROTATION: CW = 1, CCW = 2					

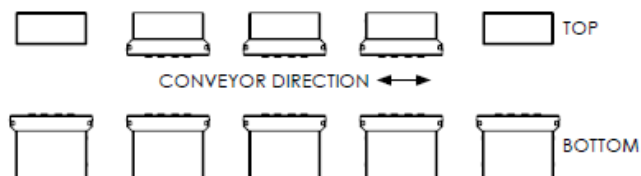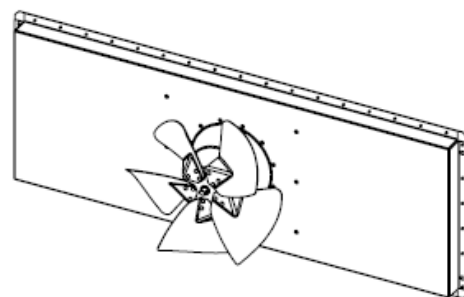

NOTES:
1. BAKE TEMP / TIME: 475° F / 6:00 MINUTES.

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC. IS PROHIBITED.

SIGNATURE ON ECN IS APPROVAL OF RELEASE OR CHANGE. WEIGHT 104.127

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: X.00 ±0.030 XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY DP DATE 6/3/2009

DESCRIPTION XLT OVENS
Domino's FINGER CHART STANDARD

MATL SEE BOM

DWG XA-8-3855-Domino-S


SHEET 1 OF 1
DO NOT SCALE

XLT 3855 D



XLT-3855D

ECN	DESCRIPTION	DATE	BY
10-417	APPROVED BY PETE GOODMAN	9/21/2010	SMW

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	XA-8001A-38-B-PR	FINGER BODY 38 BOT w/PERF RAMP	5
2	XA-8001A-38-T-PR	FINGER BODY 38 TOP W/PERF RAMP	3
3	XM-8009-S	FINGER BLOCK OFF PLATE	2
4	XM-8681C	38xx FINGER OUTER PLATE	8

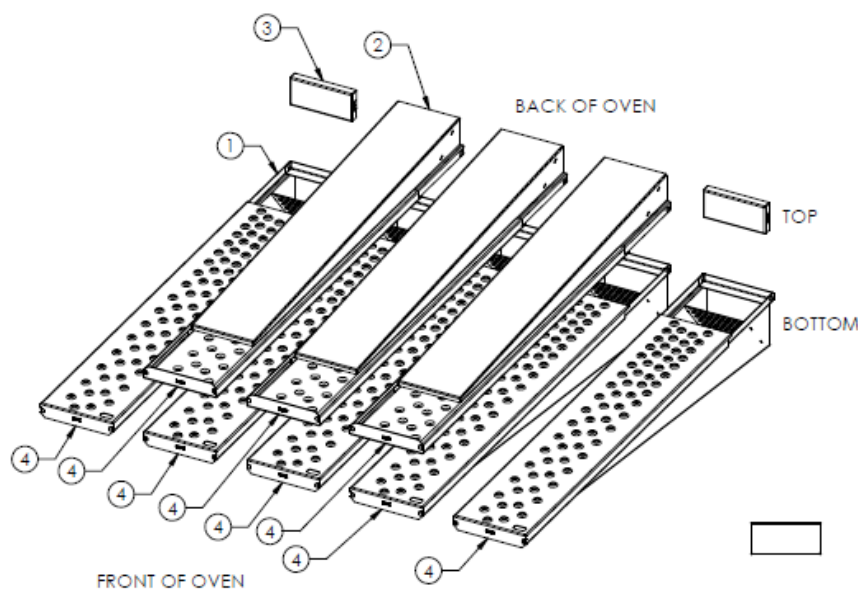

THIS FINGER ARRANGEMENT IS ONLY APPROVED FOR THE CONFIGURATION(S) AS NOTED BELOW					
FAN(S) ROTATION	BURNER TYPE	APPD.	NOT APPD.	DATE	DESIGN VALIDATION
B16-S-2	SQ	X		3/25/2010	PG
LEGEND: FAN STYLE: A16 = T3 STYLE (16"); B16 = T32 STYLE (TRUE 16"); C16 = T32 STYLE (TAPERED 16"); NO. OF FAN BLADES: 4, 5 OR 6; FAN ROTATION: CW = 1, CCW = 2					

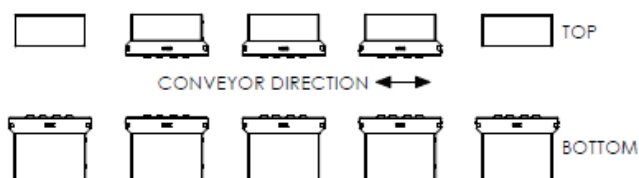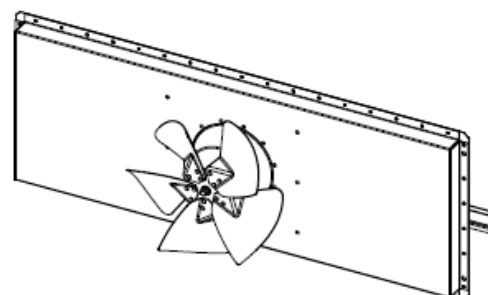

FRONT VIEW

FOR PART THAT IS TO BE USED FOR CUSTOMER REPLACEMENT AND/OR WARRANTY PLEASE CHECK THE CORRECT BOX (S).

☐ WARRANTY (CW)

☐ CUSTOMER REPLACEMENT (CS)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON EACH APPROVAL OF RELEASE OR CHANGE

WEIGHT 128.54

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XX ±.0030 .XXX ±.0010
ANGULAR: .1° FRACTIONS: 1/32

DRAWN BY SMW DATE 9/21/2010

DESCRIPTION

XLT OVENS

Domino's FINGER CHART

MATL SEE BOM

DWG

XA-8D3855-Domino-S

SHEET 1 OF 1

DO NOT SCALE


XLT 3855 H

Reference	Description	Date	By
H03	XM-8010D-xx55-B Was XM-8010C-xx55-B, XM-8010D-xx55-T Was XM-8010C-xx55-T; Added (9) XF-110; Removed (9) XM-8013A-S; Released For Customer Approval	1/25/2023	NOH

Approval

By: _____ Date: _____

Item No.	Part No.	Description	QTY
1	XA-8001C-38-B	Finger Body 38xx Bot No Ramp	5
2	XA-8001C-38-T-PR-105	Finger Body 38xx Top w/Perf R	4
3	XF-110	1/4"-14 Thd Fmg Screw	9
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8412E	Finger Inner Plate Perforated	5
6	XM-8004-8424E	Finger Inner Plate Perforated	4
7	XM-8010D-xx55-B	Finger Support Angle	1
8	XM-8010D-xx55-T	Finger Support Angle	1
9	XM-8024B-xx55	Return Air Plate	3
10	XM-8025B-3855	Endloss Plate	2
11	XM-8412E	38xx Finger Outer Plate	3
12	XM-8424E	38xx Finger Outer Plate	1
13	XM-8425E	38xx Finger Outer Plate	1
14	XM-8427E	38xx Finger Outer Plate	2
15	XM-8430E	38xx Finger Outer Plate	1
16	XM-8431E	38xx Finger Outer Plate	1

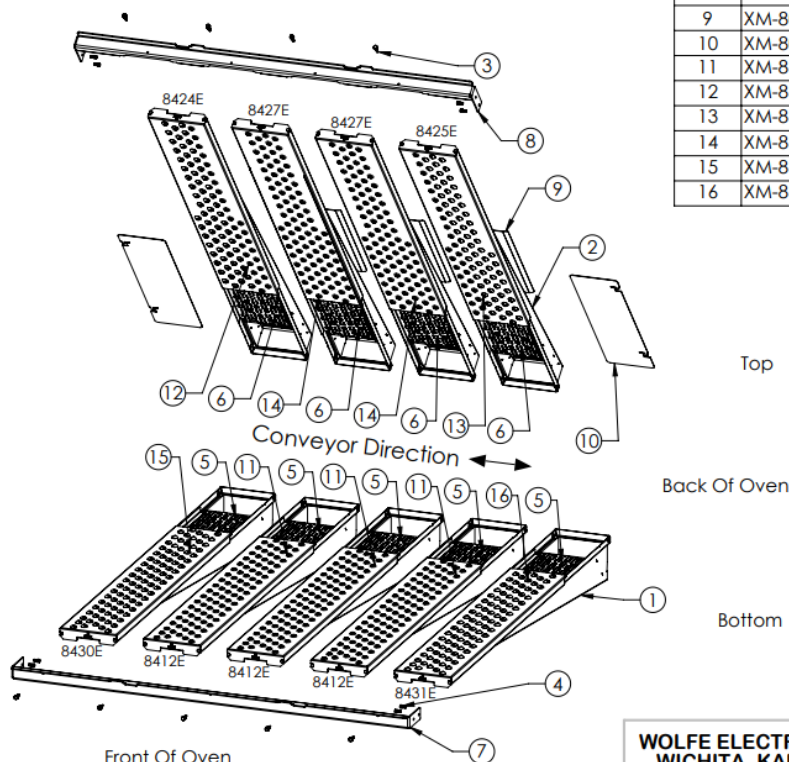

This Finger Chart Is Only Approved For The Configuration(s) As Noted Below				
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date
B17-4-2	SQ	60 HZ		
B17-6-2	SQ	50 HZ		
Legend: Fan Style: B17 = IS2 Style (true 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW=2				

WOLFE ELECTRIC INC WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY: JSR DATE: 10/14/2020

DESCRIPTION

XLT OVENS
Finger Chart Dominos

MATL See BOM

DWG XA-8H3855-Domino

SHEET 1 OF 1
DO NOT SCALE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE.

WEIGHT 160.40


XLT 4455 H

Reference	Description	Date	By
H03	Removed (4) XF-152, (4) XF-205, (1) XM-8011A-B, And (1) XM-8011A-T; Released For Customer Approval	1/30/2023	WRC

Approval

By: _____ Date: _____

Item No.	Part No.	Description	QTY
1	XA-8001C-44-B-PR	Finger Body 44xx Bot w/Perf R	5
2	XA-8001C-44-T	Finger Body 44xx Top No Ramp	4
3	XF-110	1/4"-14 Thd Fmg Screw	9
4	XF-111	Bolt 1/4-20 x 1/2 SS SHCS	8
5	XM-8004-8506E	Finger Inner Plate Perforated	4
6	XM-8004-8512E	Finger Inner Plate Perforated	5
7	XM-8010D-xx55-B	Finger Support Angle	1
8	XM-8010D-xx55-T	Finger Support Angle	1
9	XM-8024B-xx55	Return Air Plate	3
10	XM-8025B-xx55	Endloss Plate	2
11	XM-8506E	44xx Finger Outer Plate	2
12	XM-8512E	44xx Finger Outer Plate	5
13	XM-8513E	44xx Finger Outer Plate	1
14	XM-8514E	44xx Finger Outer Plate	1

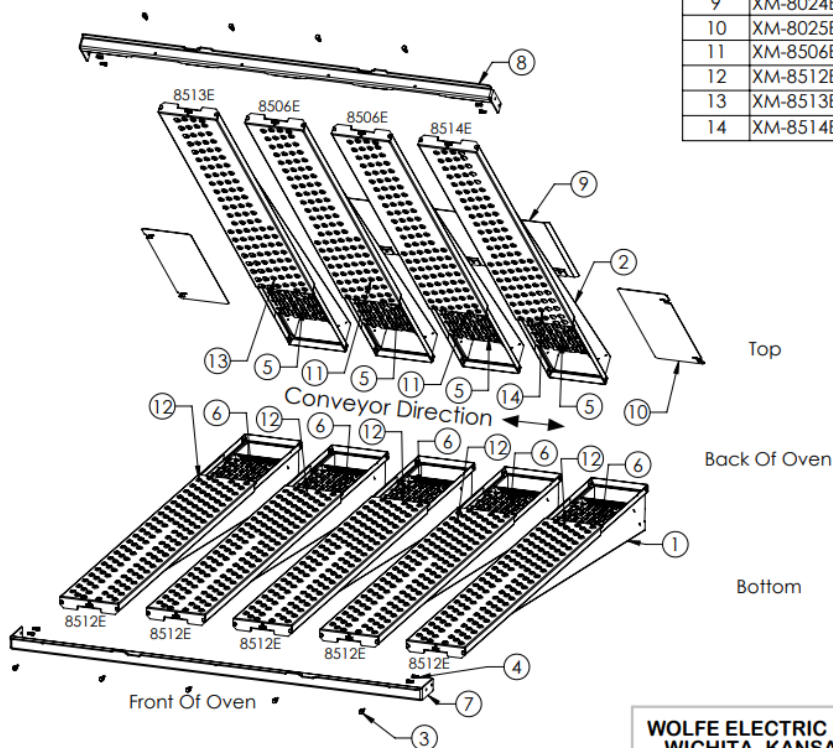

This Finger Chart is Only Approved For The Configuration(s) As Noted Below					
Fan(s) Rotation	Burner Type	Power Supply	Appd.	Date	Design Validation
B17-4-2	SQ	60 Hz			
B17-6-2	SQ	50 Hz			
Legend:			Fan Style: B17 = TS2 Style (True 17) No. Of Fan Blades: 3, 4 or 6 Fan Rotation: CW = 1, CCW = 2		

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WOLFE ELECTRIC INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF WOLFE ELECTRIC INC IS PROHIBITED.

SIGNATURE ON ECN IS
APPROVAL OF
RELEASE OR CHANGE

WEIGHT

179.25

WOLFE ELECTRIC INC
WICHITA, KANSAS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES & TOLERANCES ARE:
DECIMALS: .XXX ±0.030 .XXX ±0.010
ANGULAR: ±1° FRACTIONS: ±1/32
DRAWN BY NOH DATE 11/16/2022

DESCRIPTION

XLT OVENS
Finger Chart Dominos

MATL




See BOM

DWG

XA-8H4455-Domino

SHEET 1 OF 1
DO NOT SCALE

EDGE 3240

FINGER INSERTS	FINGER COVERS		BLOCK OFFS
A  140209 SOFT FULL OPEN	B  145233-3 3 HOLES CENTER	C  145233-6 6 HOLES FULL	D  140002 PLENUM CAP

TOP FINGERS

INSERT	A	A	A	A
COVER	B	B	B	B

← **BELT DIRECTION** →
(BI-DIRECTIONAL)




BOTTOM FINGERS

INSERT	A	A	A	A
COVER	C	C	C	C

DATE: 12/22

edgeovens.com

EDGE 3260S

FINGER INSERTS	FINGER COVERS		BLOCK OFFS
A 	B 	C 	D 
140159 SOFT FULL OPEN	145238-3 3 HOLES CENTER	145238-5 5 HOLES FULL	140007 PLENUM CAP

TOP FINGERS




INSERT	A	A	D	A	A	D	A	A
COVER	B	B		B	B		B	B

← **BELT DIRECTION** →
(BI-DIRECTIONAL)

BOTTOM FINGERS

INSERT	A	A	A	D	D	A	A	A
COVER	C	C	C			C	C	C

EDGE 3270

FINGER INSERTS	FINGER COVERS		BLOCK OFFS
A	B	C	D
			
140209 SOFT FULL OPEN	145233-4 4 HOLES CENTER	145233-6 6 HOLES FULL	140002 PLENUM CAP

TOP FINGERS




INSERT	A	A	D	A	A	D	A	A
COVER	B	B		B	B		B	B

← **BELT DIRECTION** →
(BI-DIRECTIONAL)

BOTTOM FINGERS

INSERT	A	A	A	D	D	A	A	A
COVER	C	C	C			C	C	C

EDGE 4460S

FINGER INSERTS	FINGER COVERS		BLOCK OFFS
A	B	C	D
			
140810 5 HOLE FULL OPEN	145236S-3 3 HOLE CENTER	145236S-5 5 HOLES FULL	140007 PLENUM CAP

TOP FINGERS

INSERT	A	A	D	A	A	D	A	A
COVER	B	B		B	B		B	B


← **BELT DIRECTION** →
(BI-DIRECTIONAL)

BOTTOM FINGERS


INSERT	A	A	A	D	D	A	A	A
COVER	C	C	C			C	C	C

LINCOLN (WEAREVER) ELECTRIC OVEN

Top Finger Arrangement

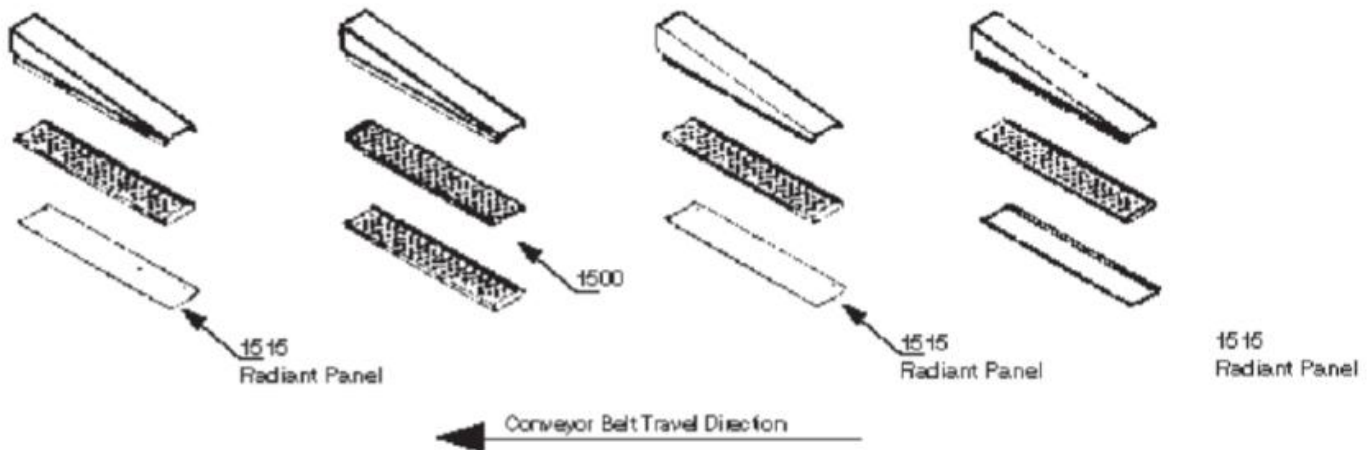

Bottom Finger Arrangement

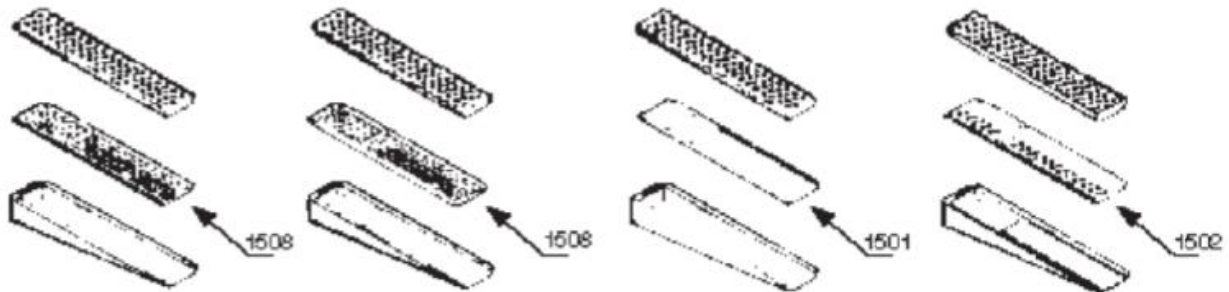

Note: Fingers arrangement must be reversed if the conveyor travel direction is opposite to as shown in this diagram