

Parameters

Start A-scan

Freeze

A-scan selection

HF

HF + Amp

Amp

Params

USB

Draw

A-mode

Diagram selection

☒ Dia 1

☐ Dia 3

☐ Dia 2

☐ Dia 4

FFT filter

Middle [MHz]

2,00

◀ ▶

Width [MHz]

2,00

◀ ▶

Gate form:

1000

◀ ▶

FFT filter on

Cepstrum filter

Middle

0,00

◀ ▶

Width

20,00


◀ ▶

Gate form:

20

◀ ▶

Cepstrum filter on

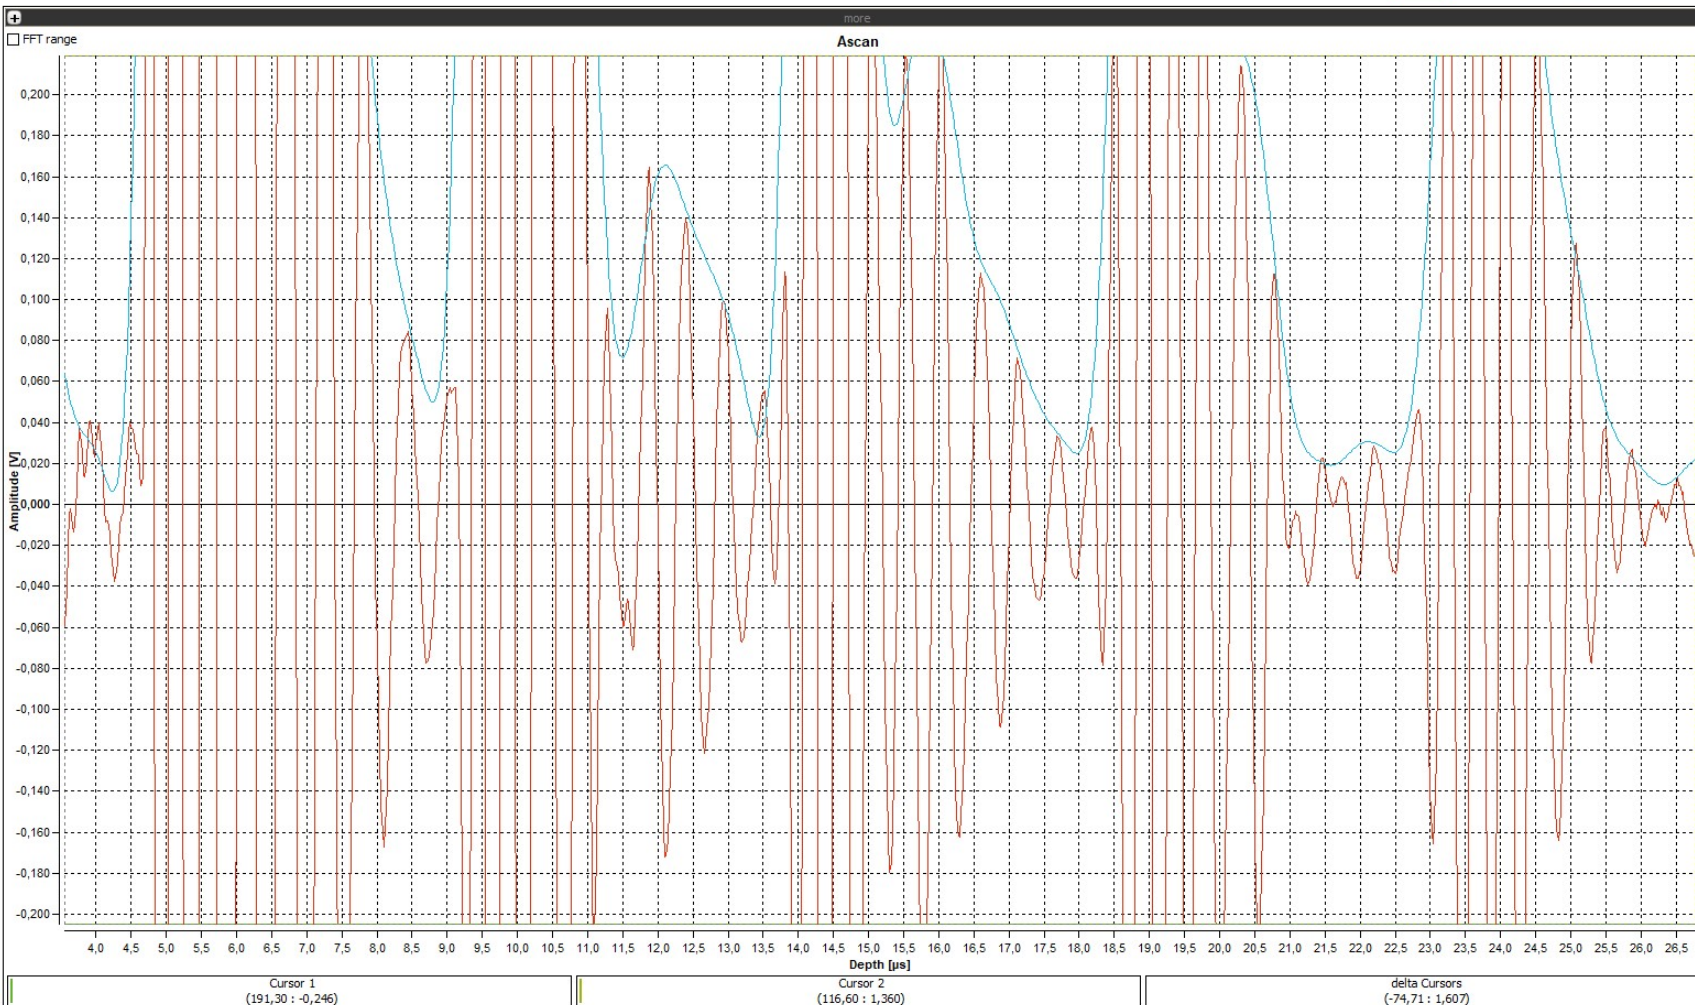

Info

Reference

Front panel

Mode

T1 - R1

reflection

Output

15 dB

Gain

15 dB

Probe 1

2 MHz

Probe 2

no probe

Status

Trigger intern

Online data

FFT filter off

HF data overrun

Average off

Frame rate 0 Hz

gAMPT

ULTRASONIC SOLUTIONS

4.2.1.19318 - 14.11.2019