

VT1004_1 details

This is comprehensive report, which provide an in-dept overview of our recent calibration measurements. The purpose of this document si to display the offset of values from their corresponding references. These deviations are critical in identifying necessary adjustments to calibrate the measurement system effectively.


The structure of the report is designed for easy navigation and understanding. For each type of measurement, you will find a chart displaying the refference values. These charts are essential as they represent the theoretically expected values against which we measure the actual performance

The VT1004_1 card, with serial number 251C, productCode 3EC01, revision 1303 was evaluated by S&S team on 6/4/2026 2:46 PM, with a sample of 1 active measurements types:


1. Measurement.

Durring the Measurement tests, the system was evaluated under 15 voltage levels (-35V, -30V, -25V, -20V, -15V, -10V, -5V, 0V, 5V, 10V, 15V, 20V, 25V, 30V, 35V).


Reference values for Measurement

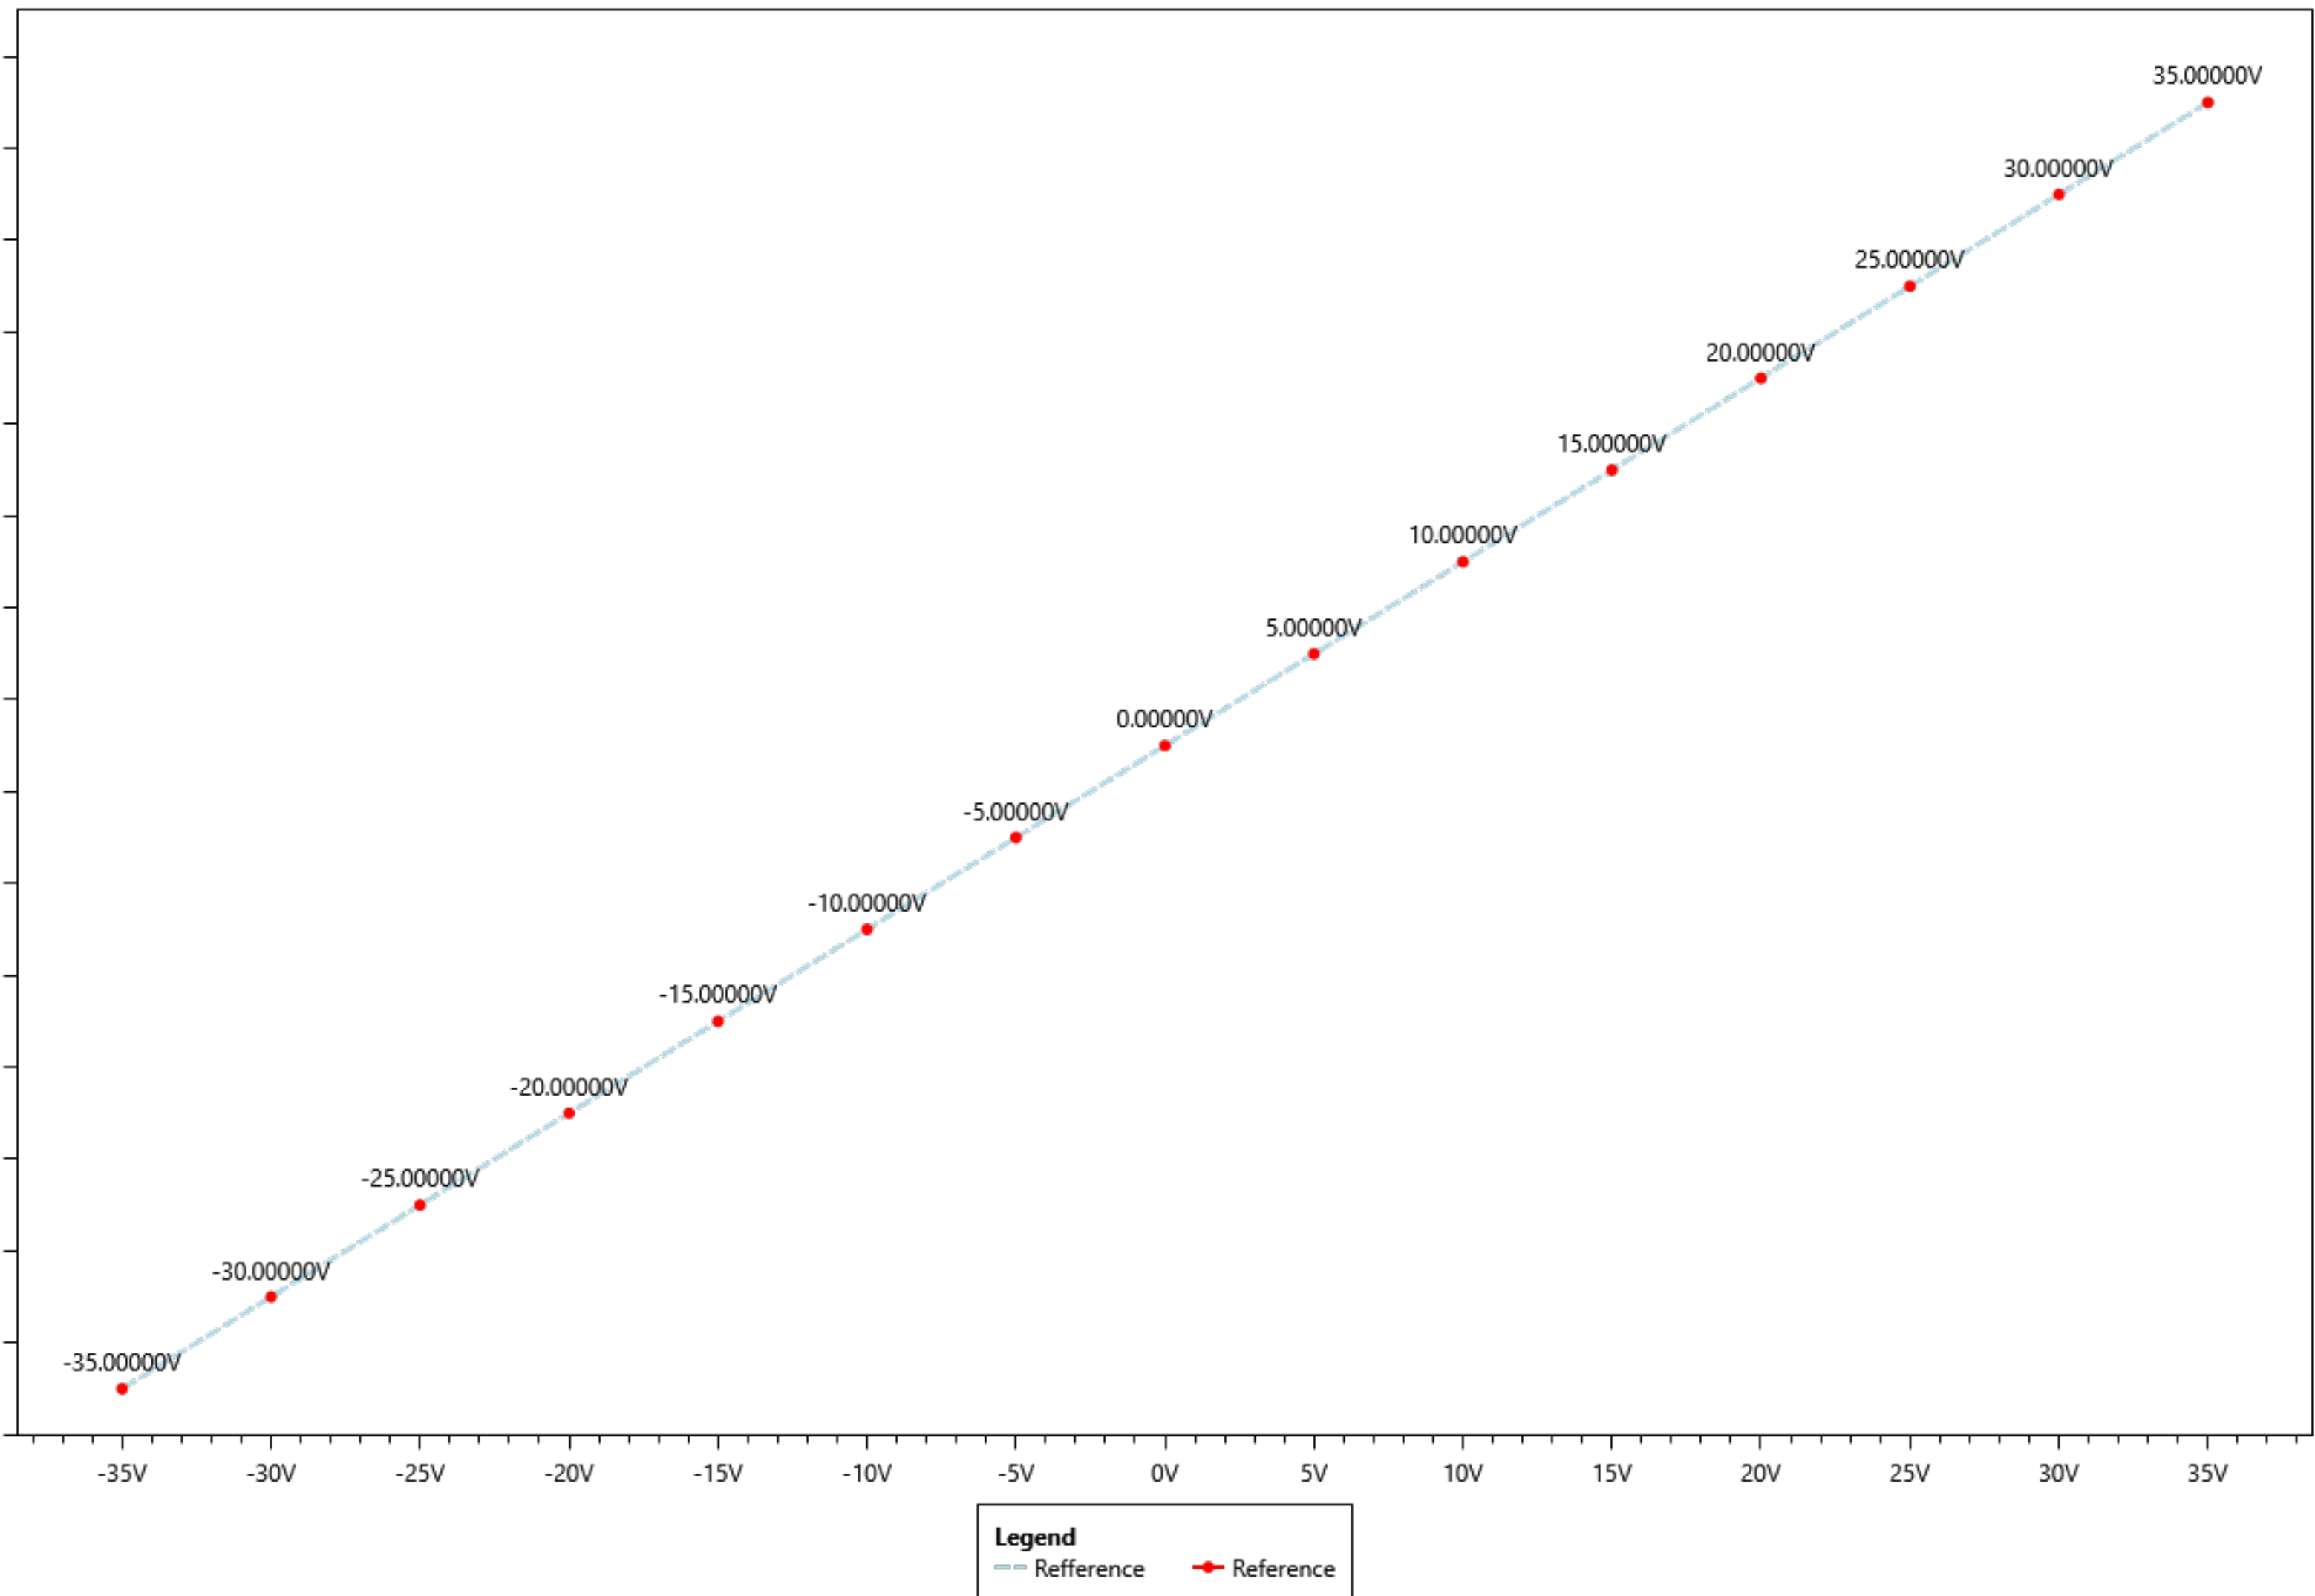


Channel 1 values for Measurement

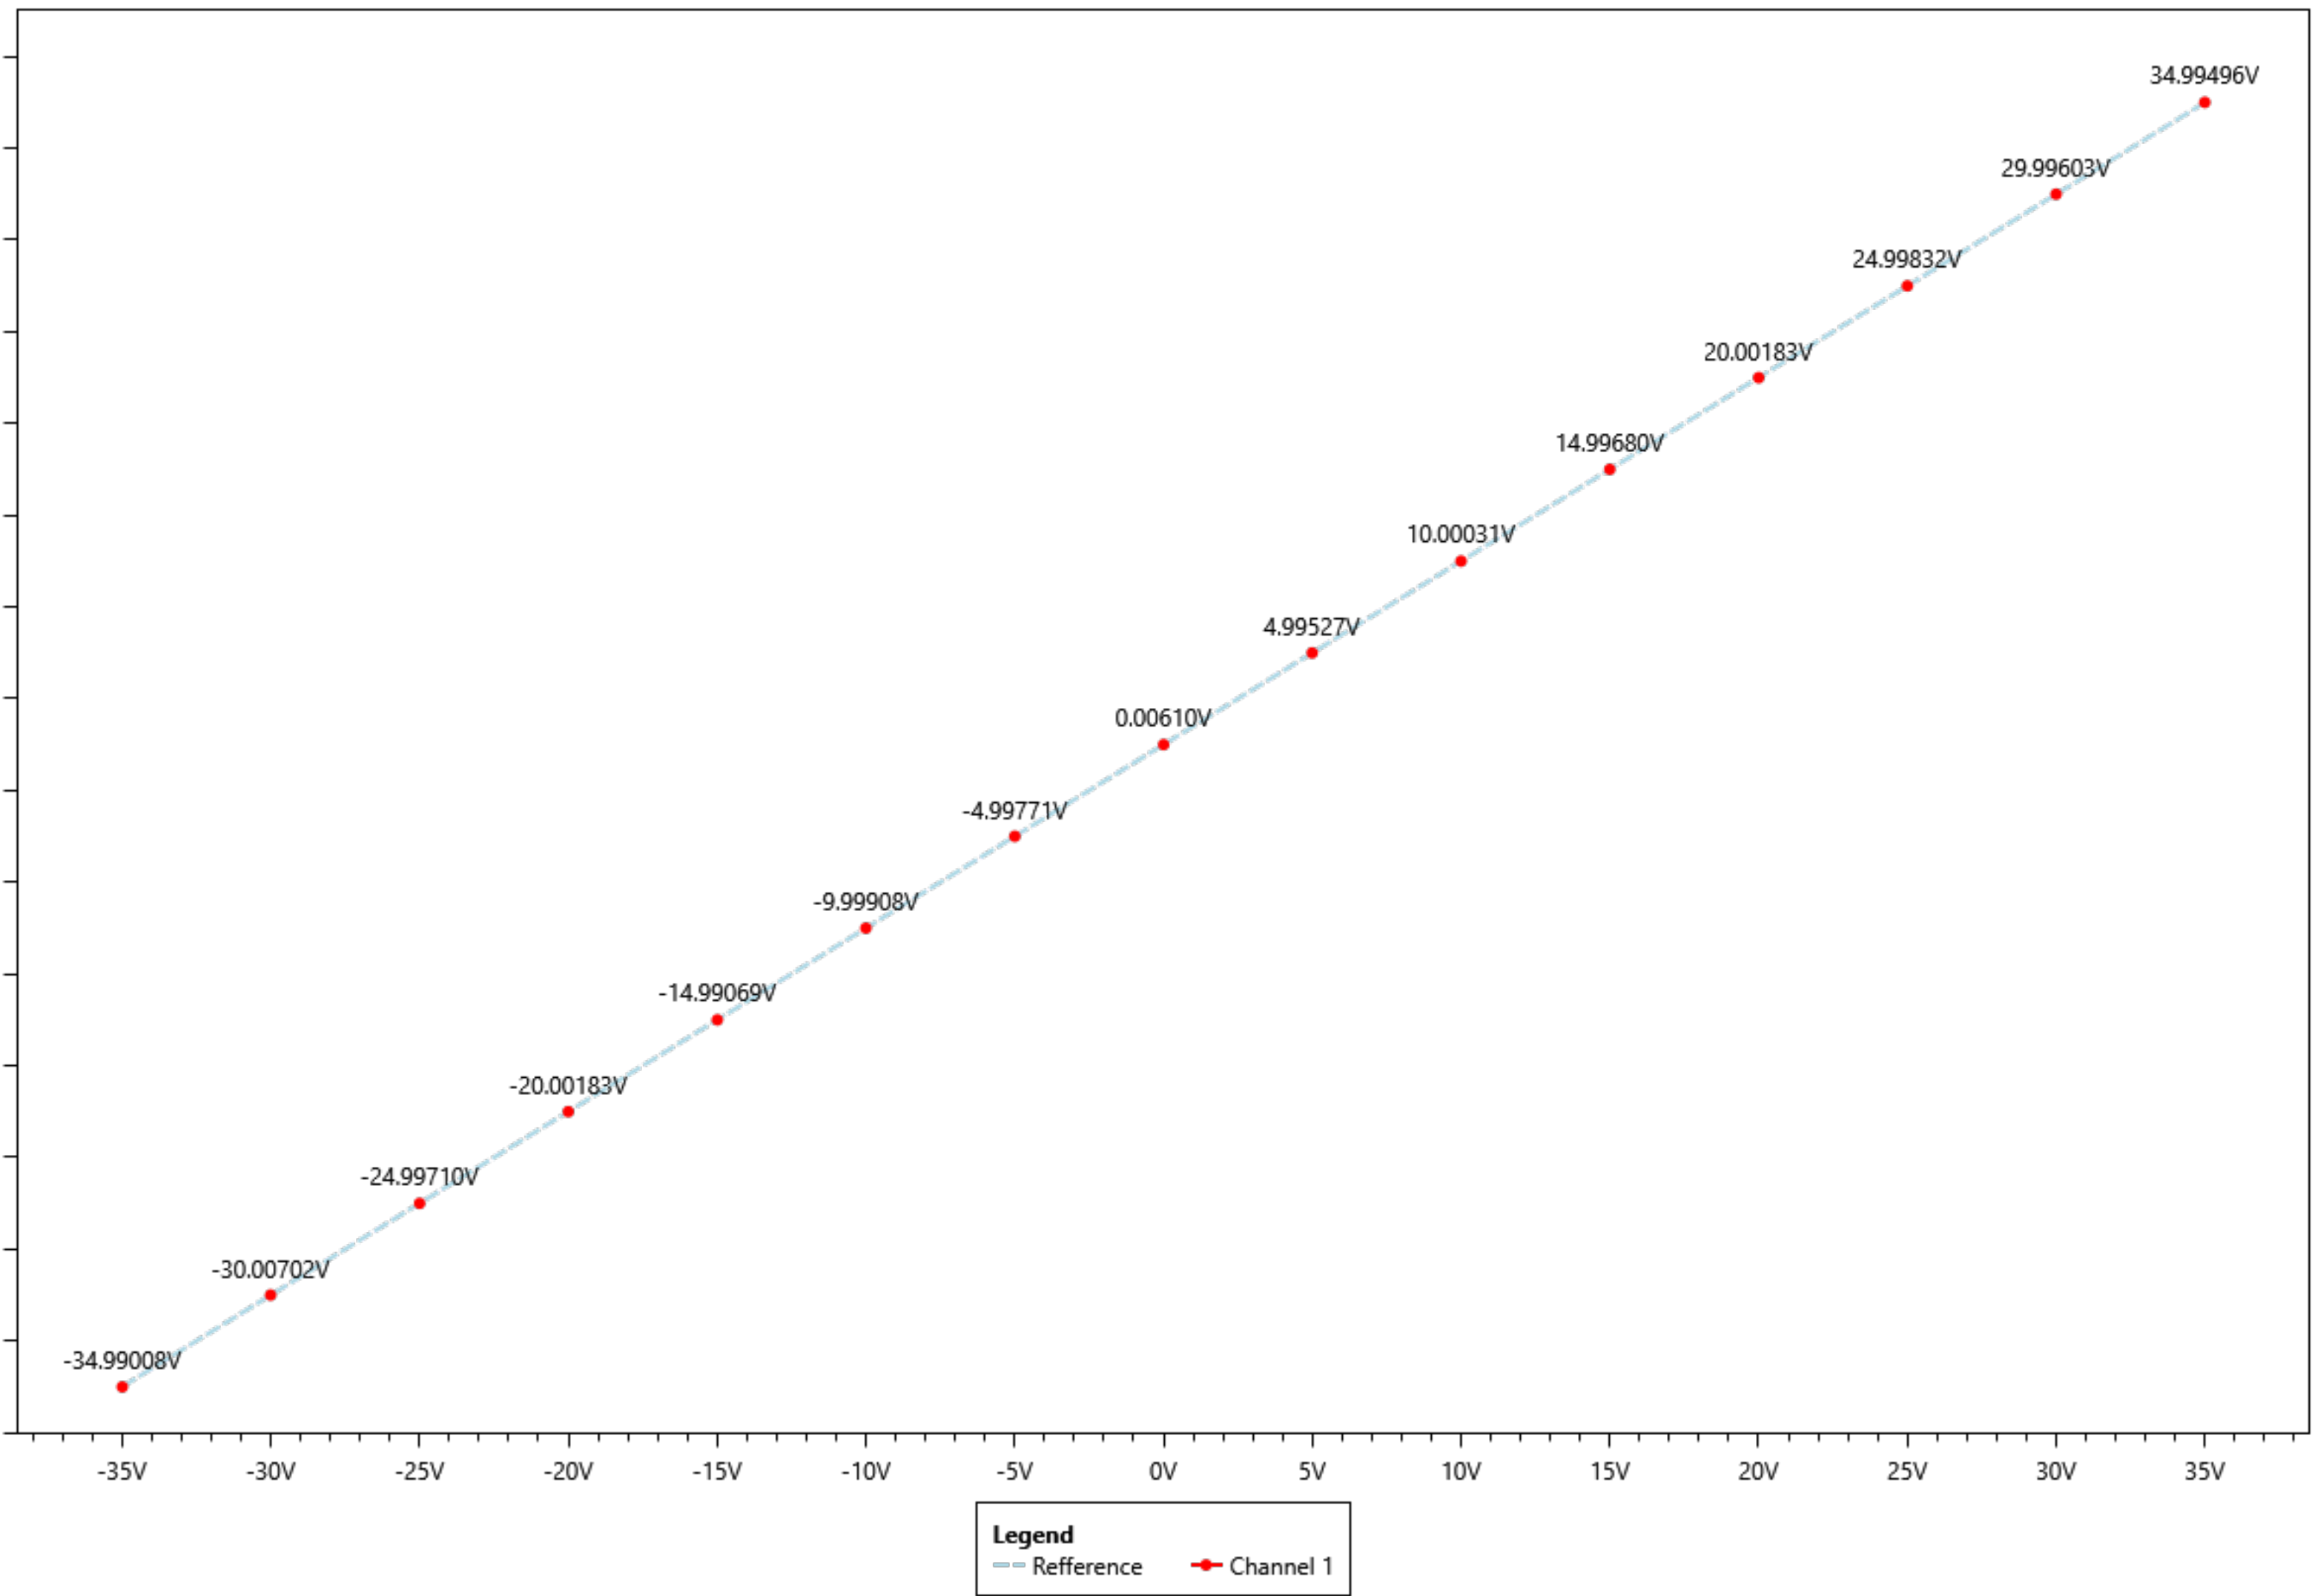


Channel 1 errors for Measurement

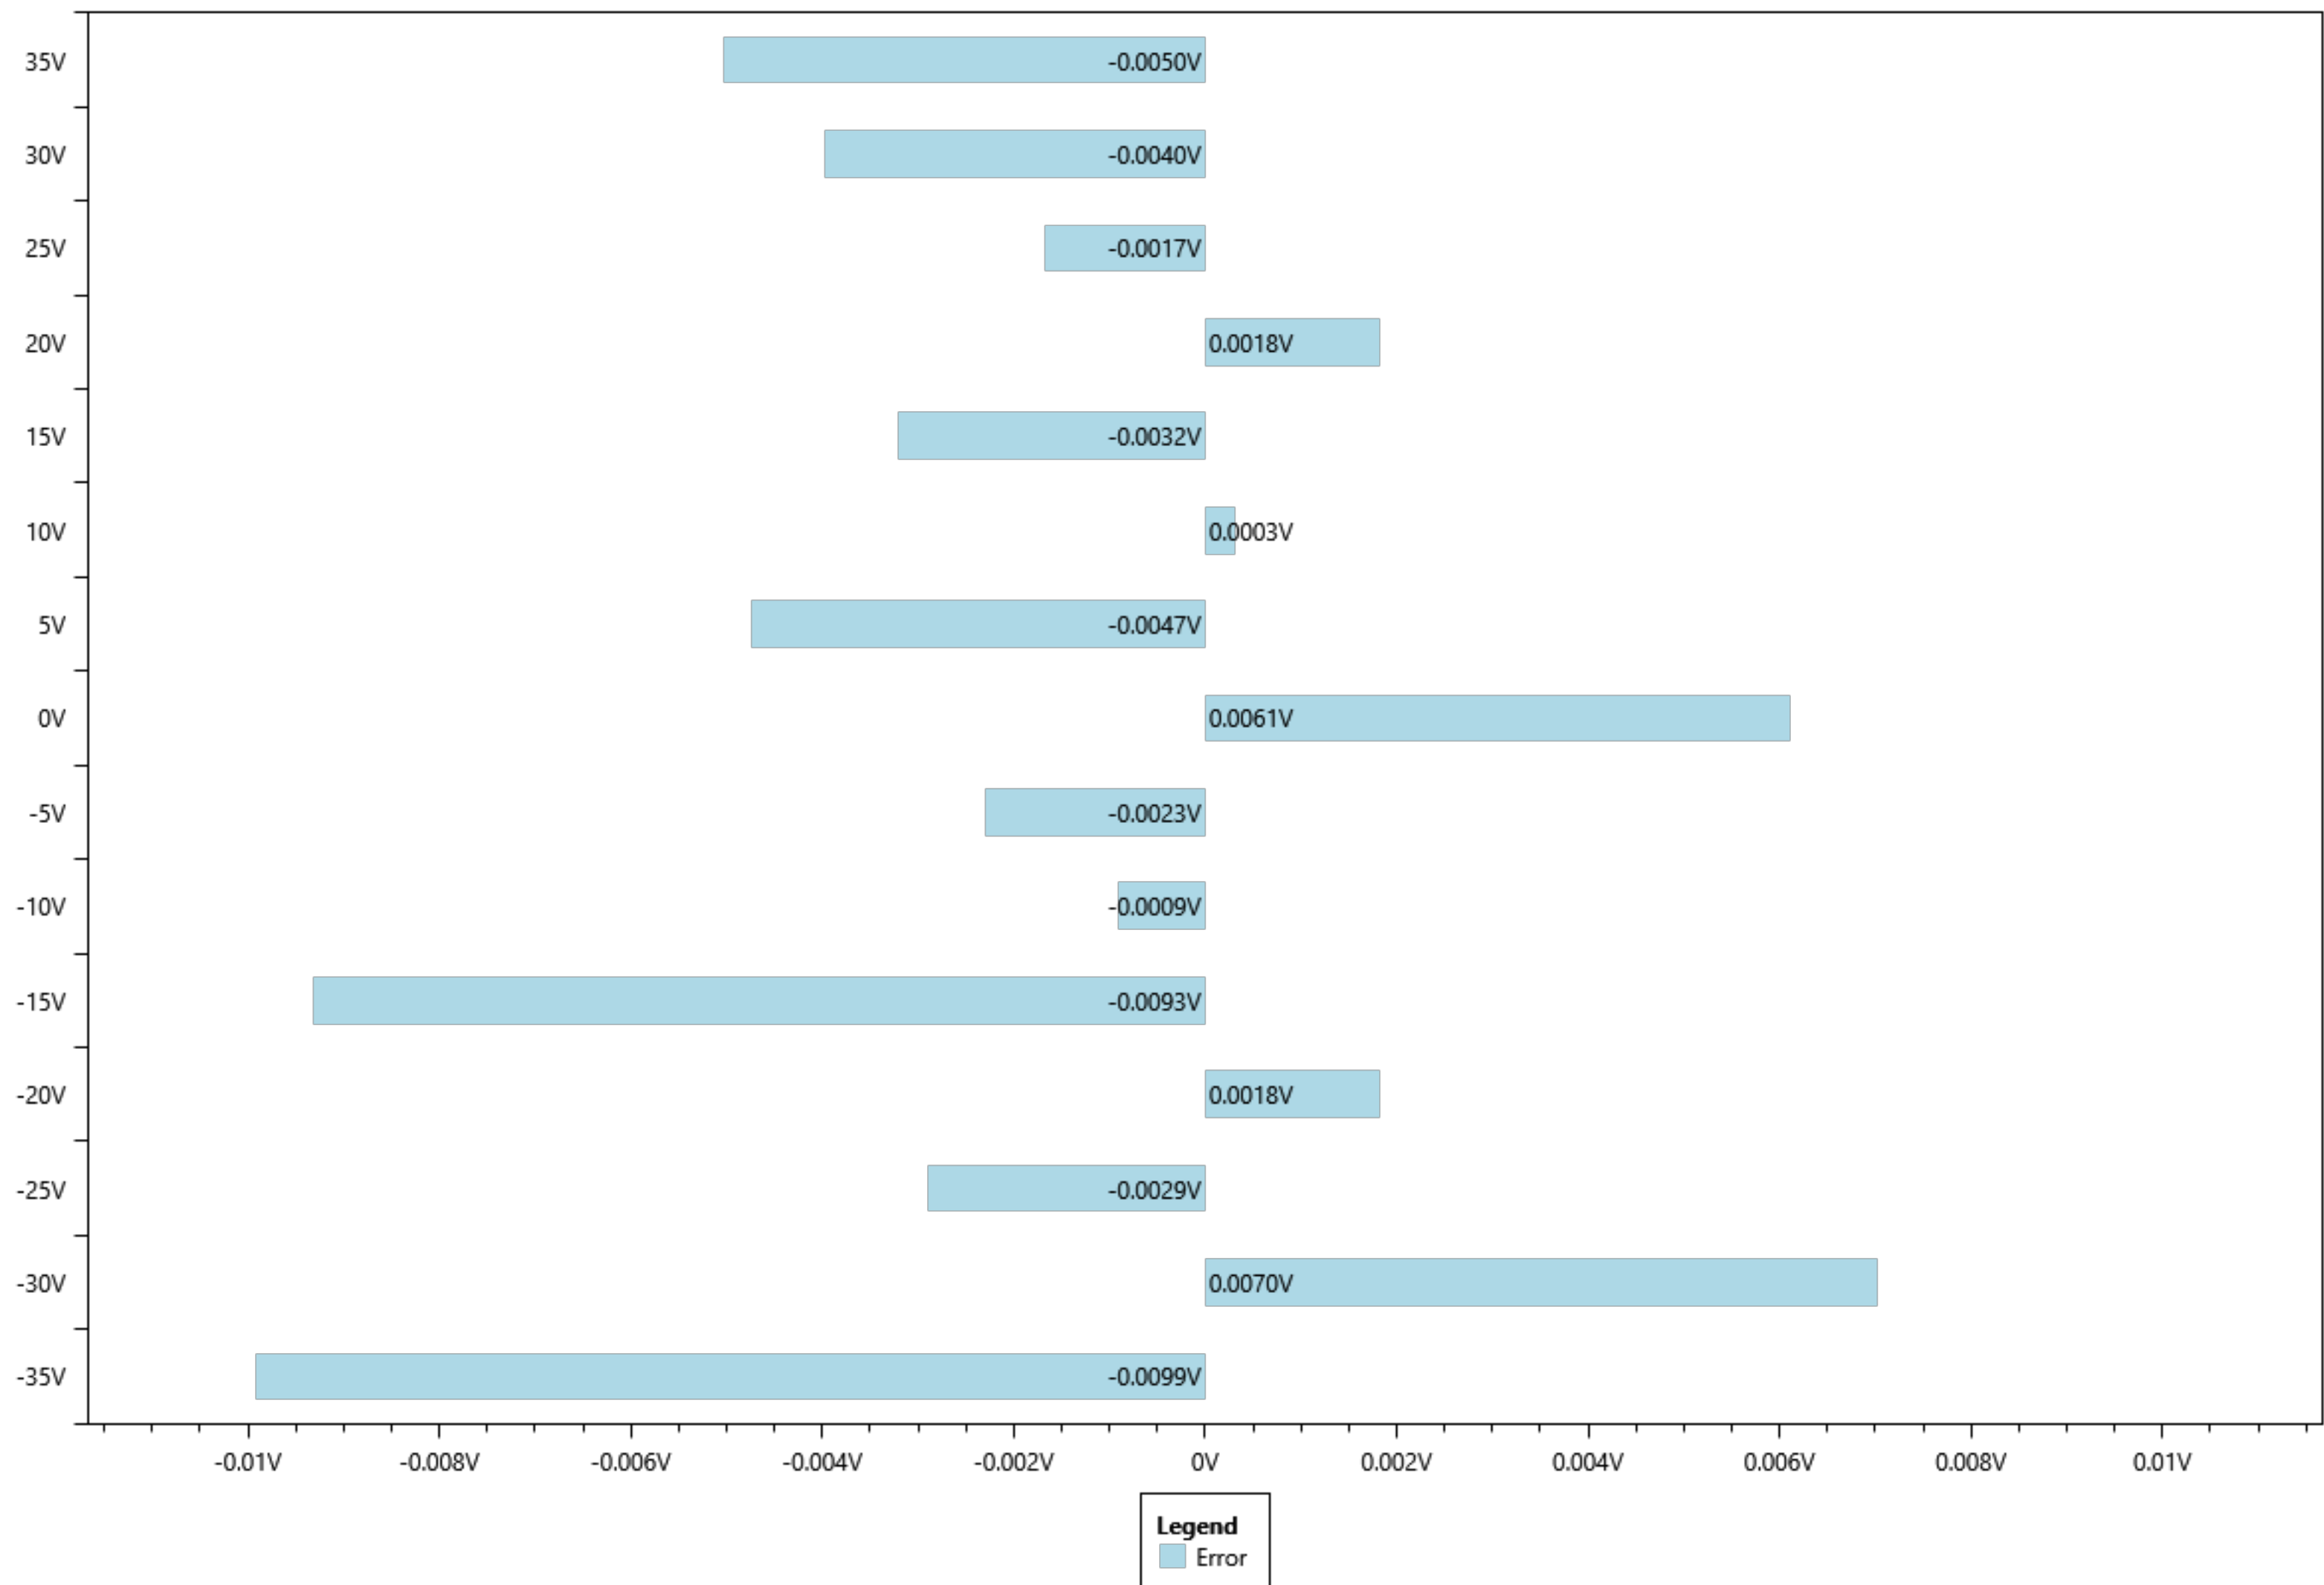

Channel 2 values for Measurement

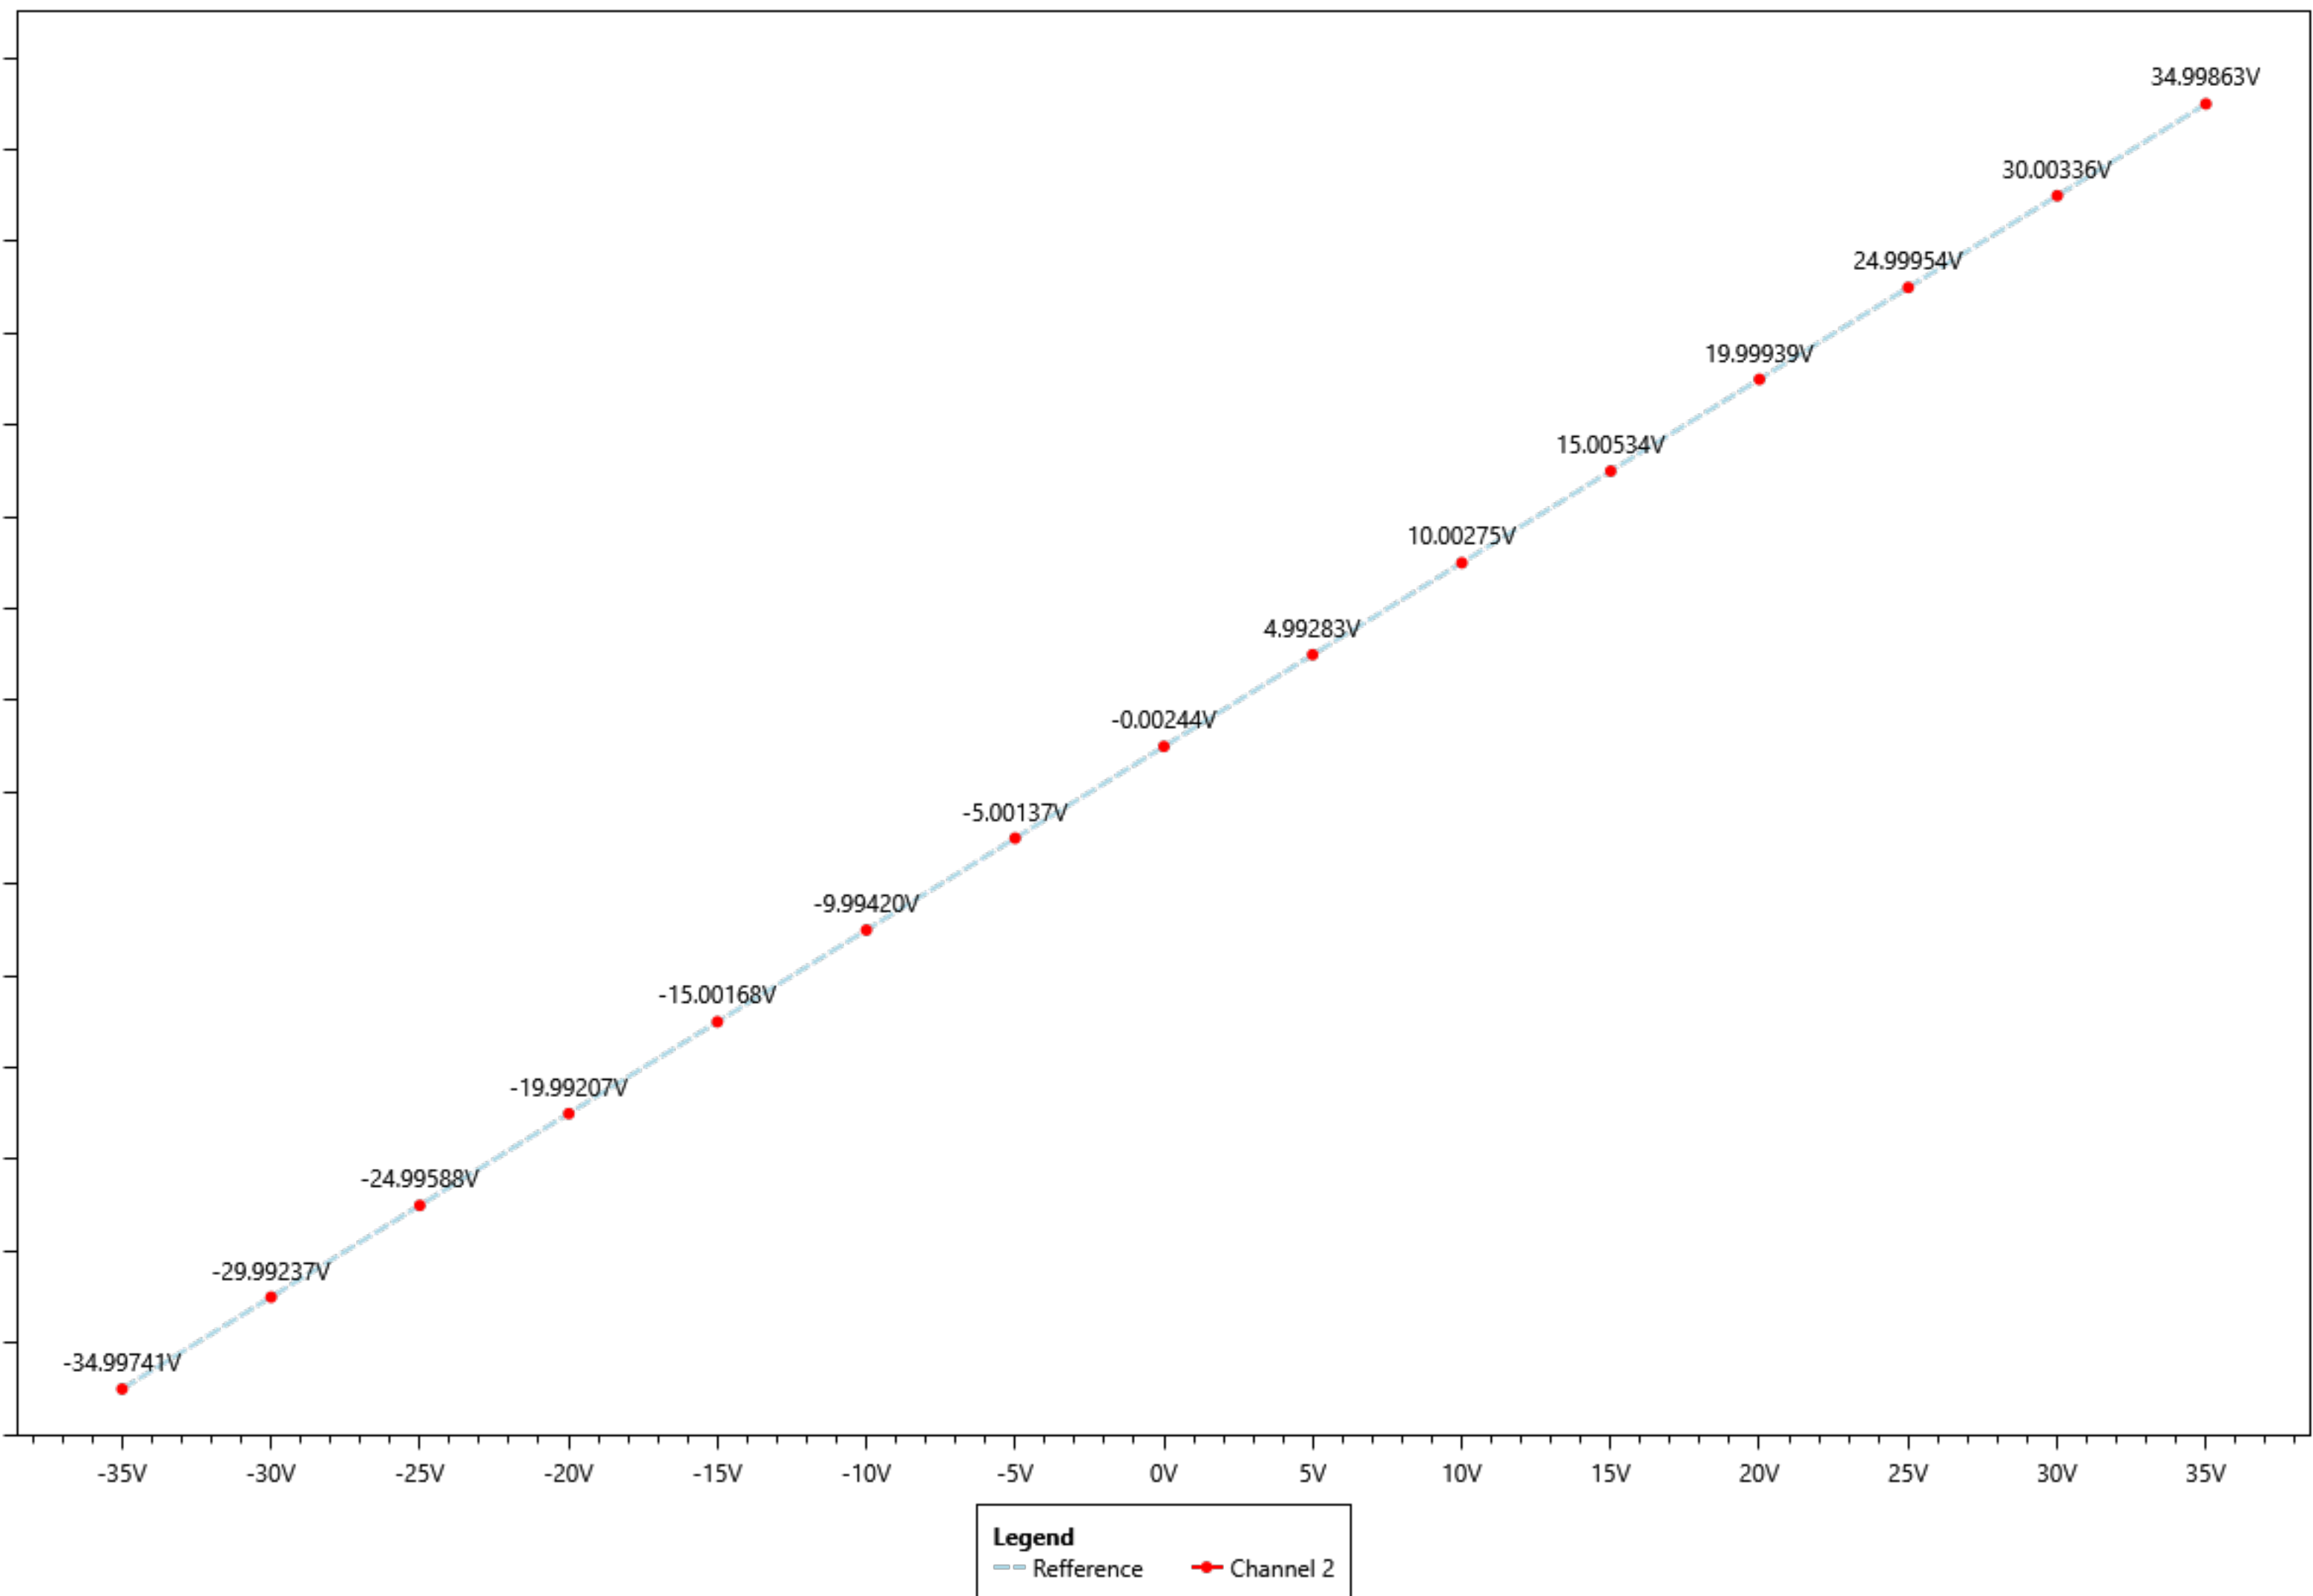


Channel 2 errors for Measurement

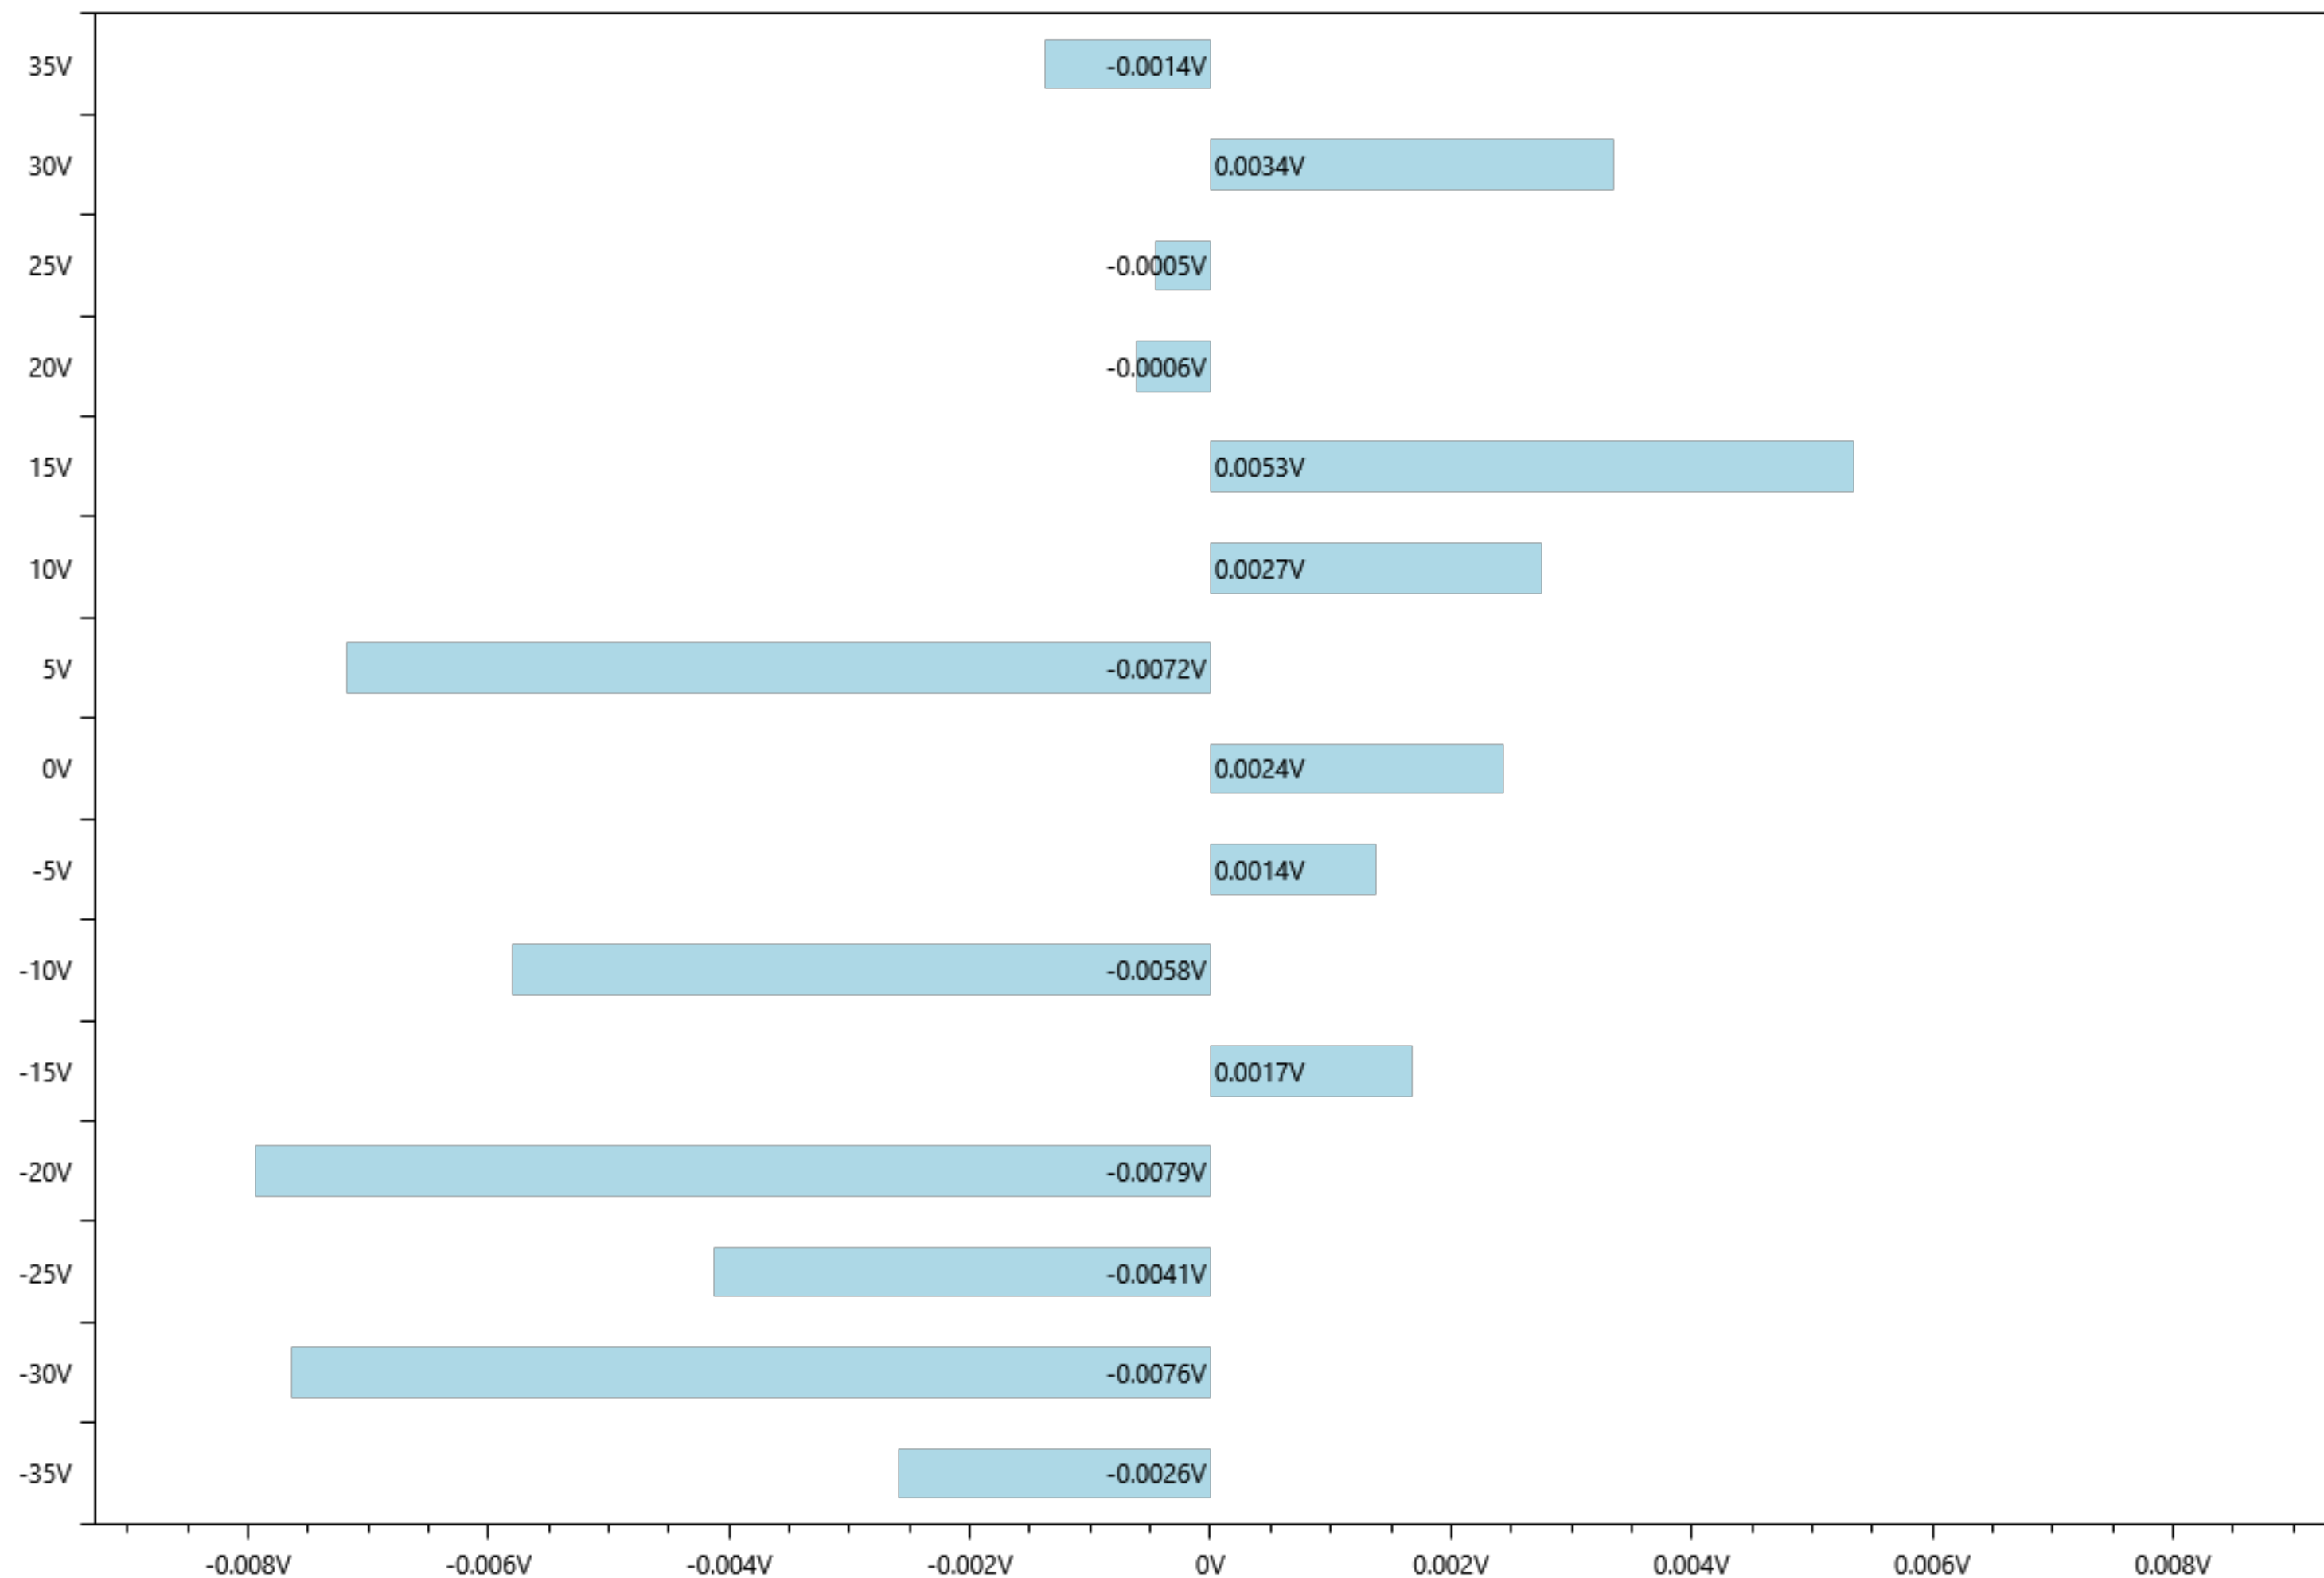


Legend
Error


Channel 3 values for Measurement

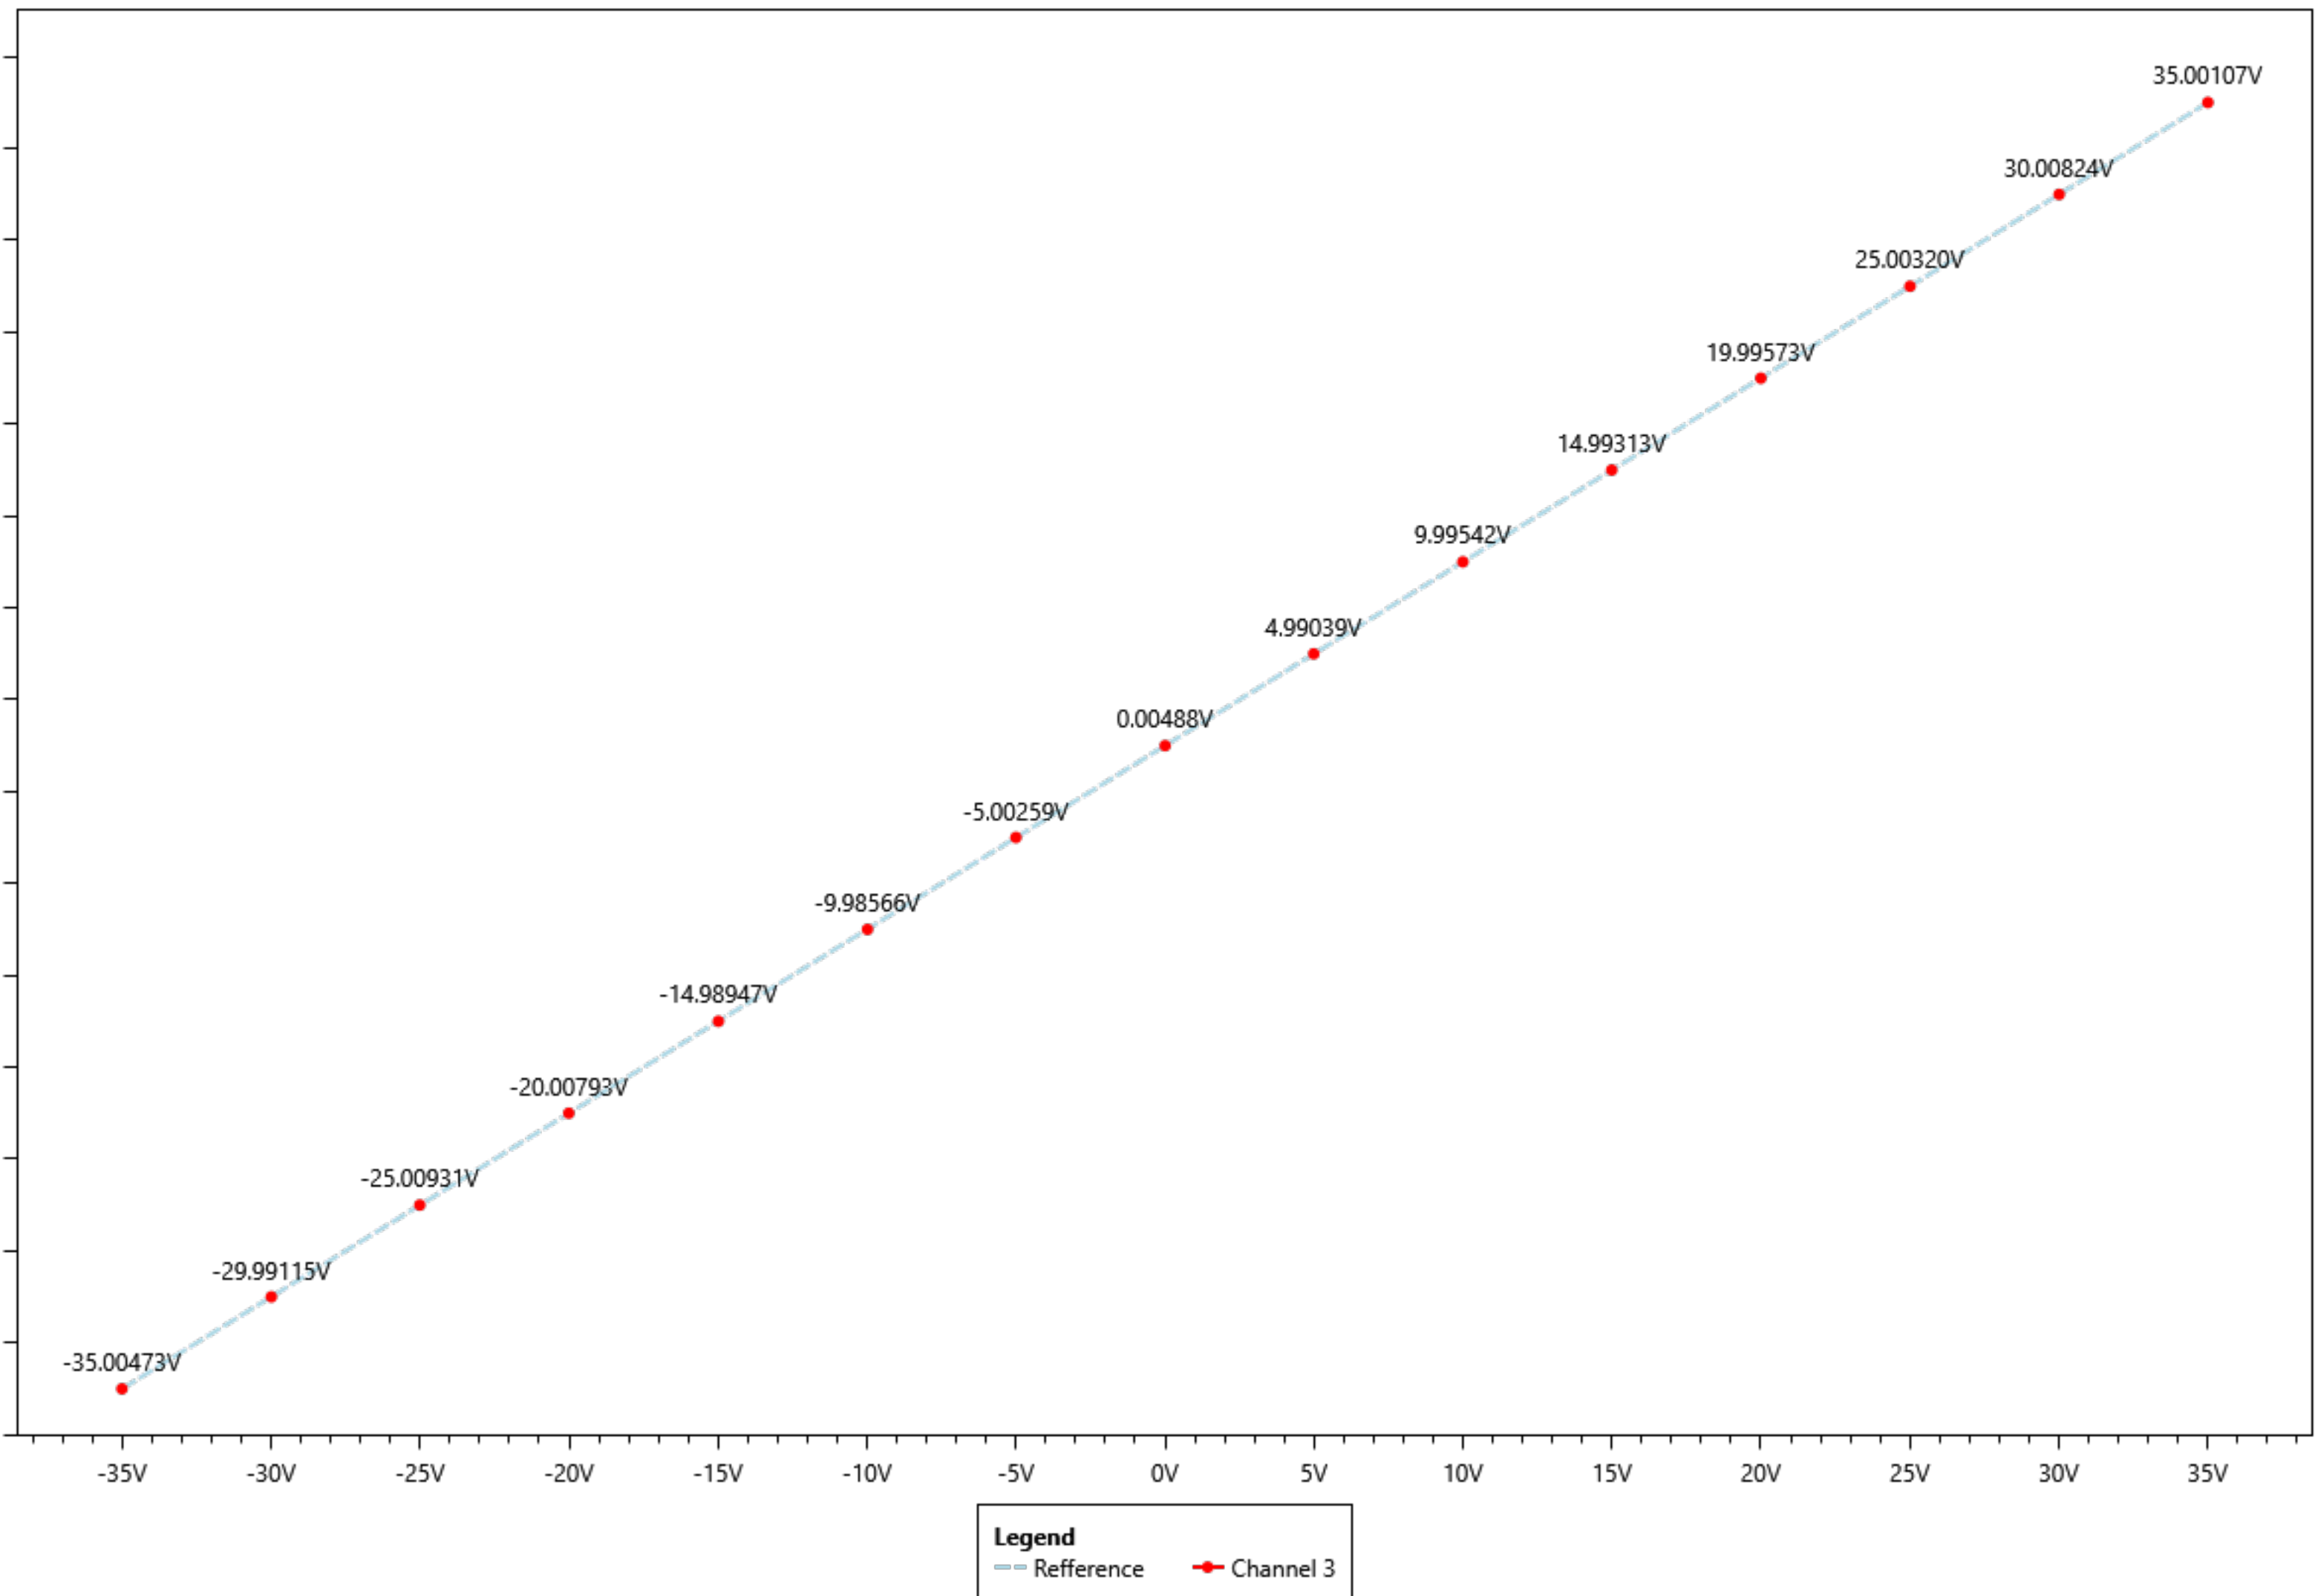

Channel 3 errors for Measurement

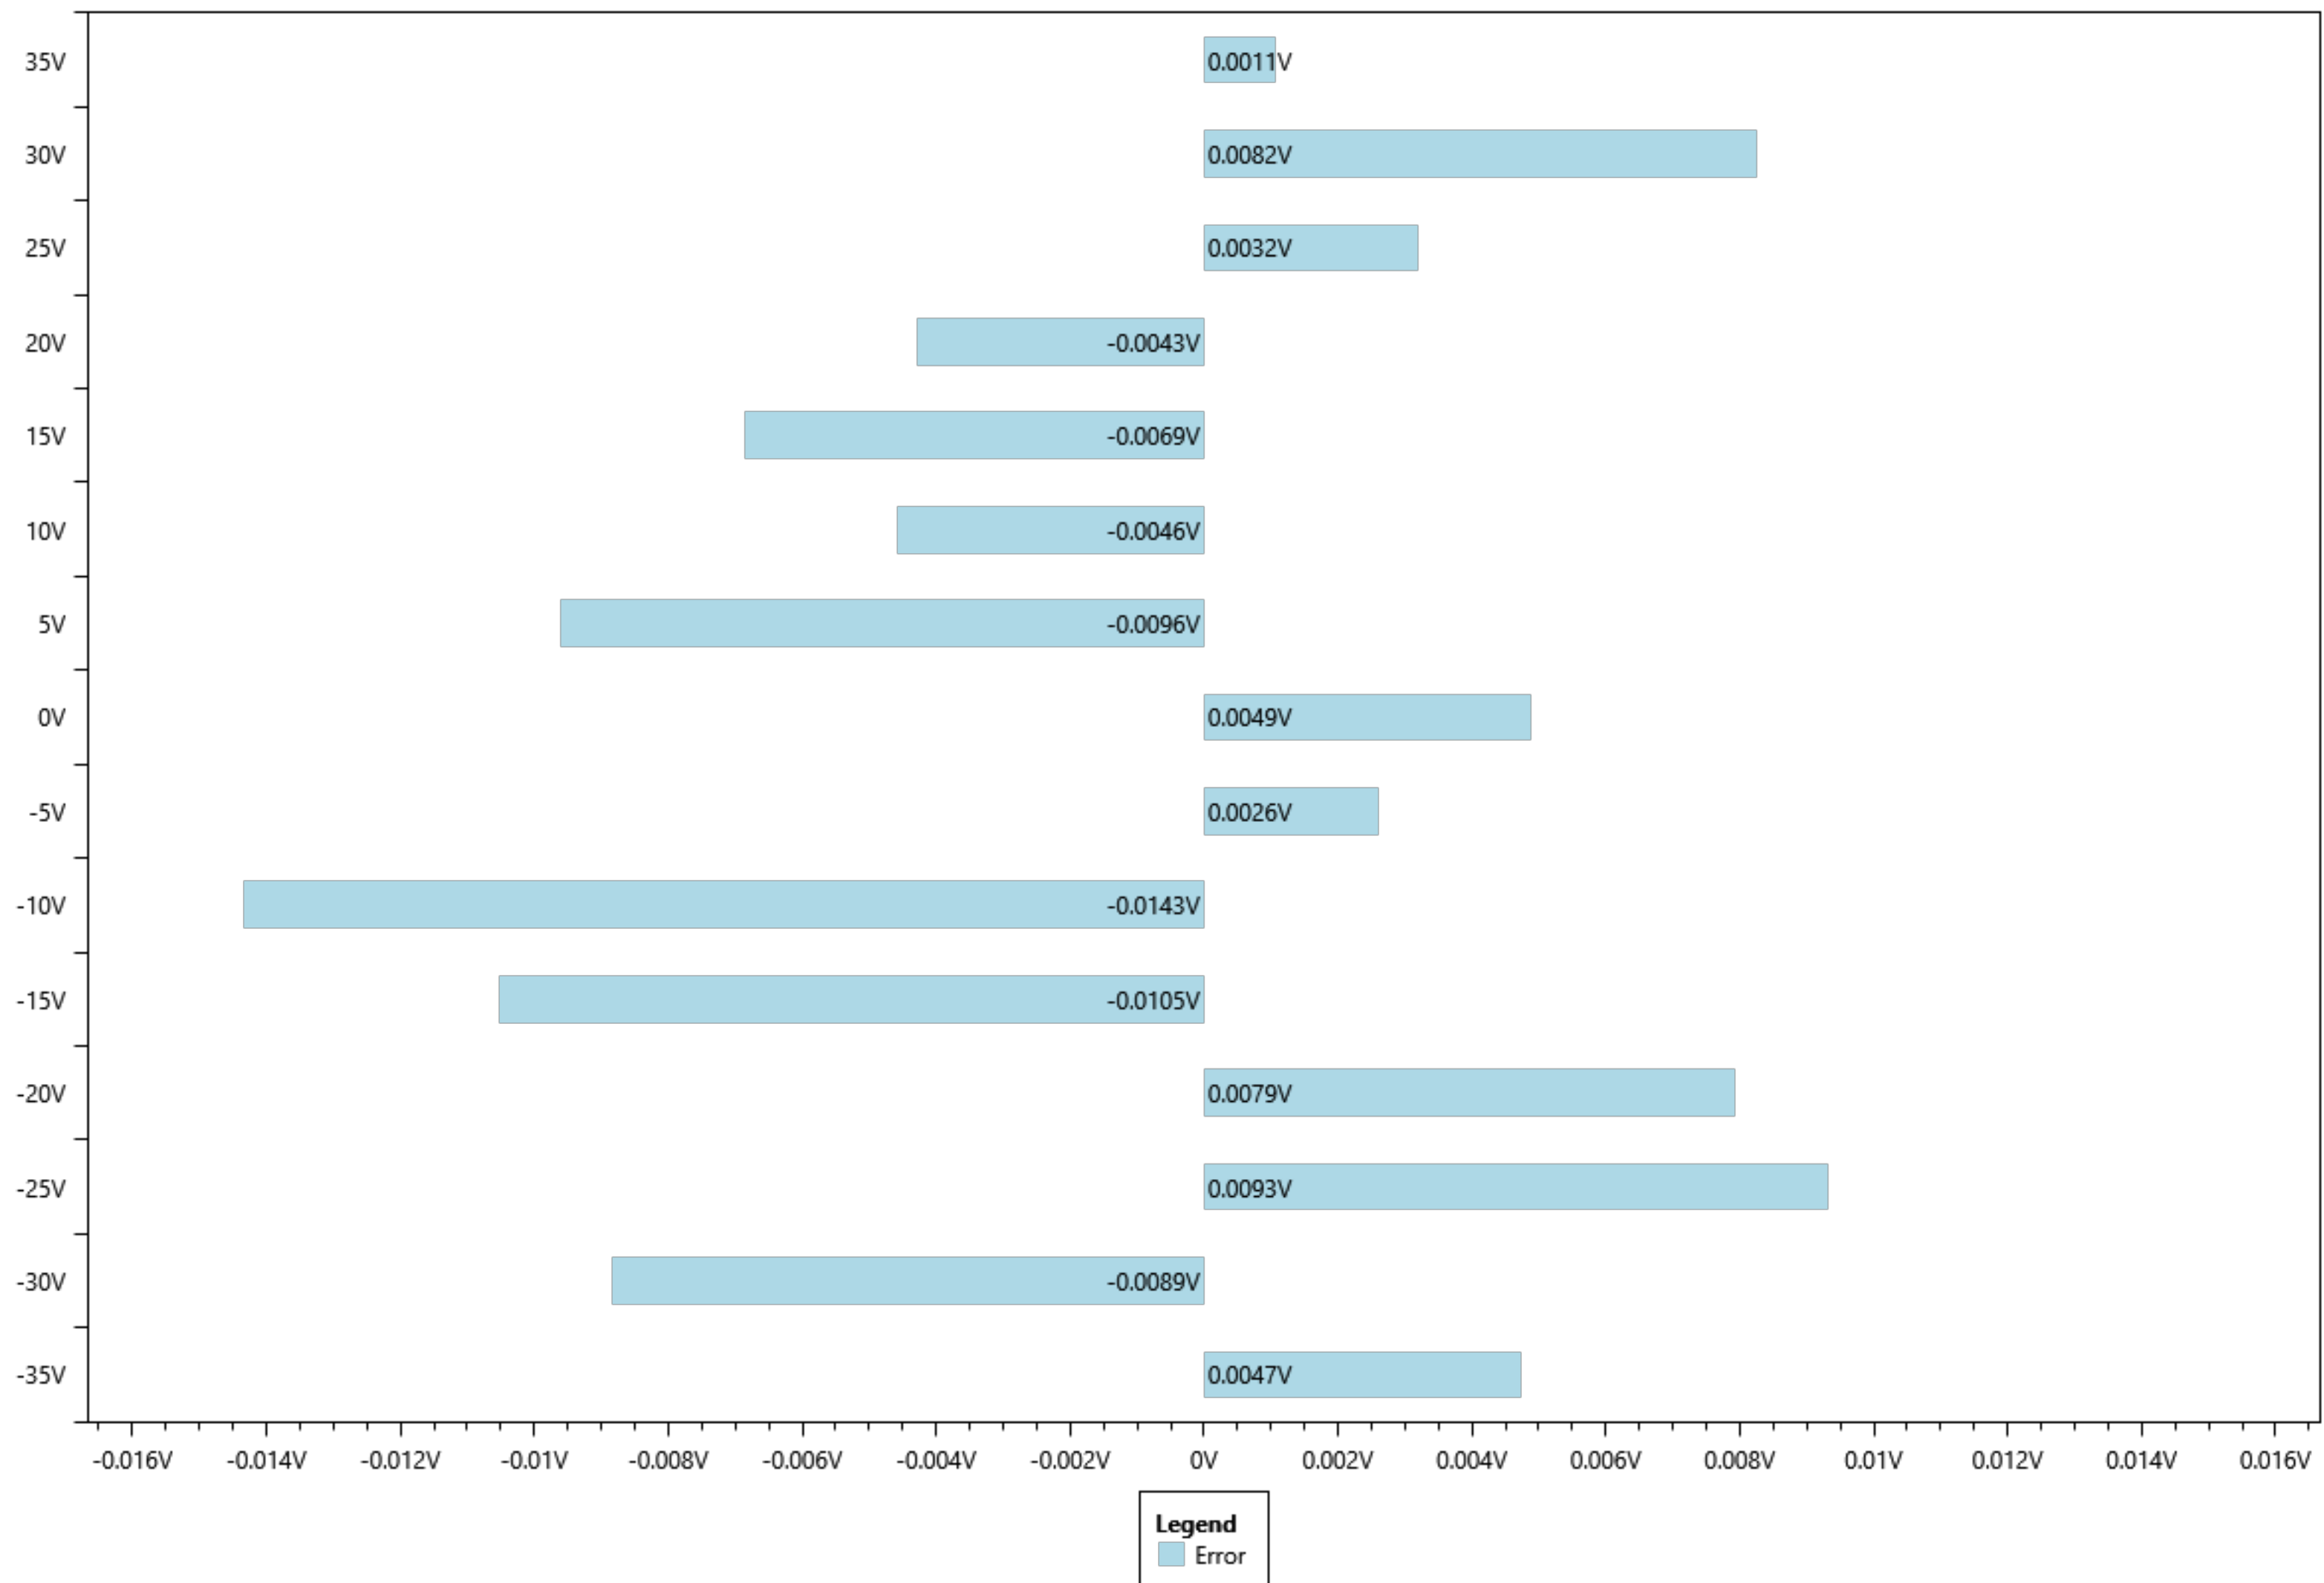

Channel 4 values for Measurement

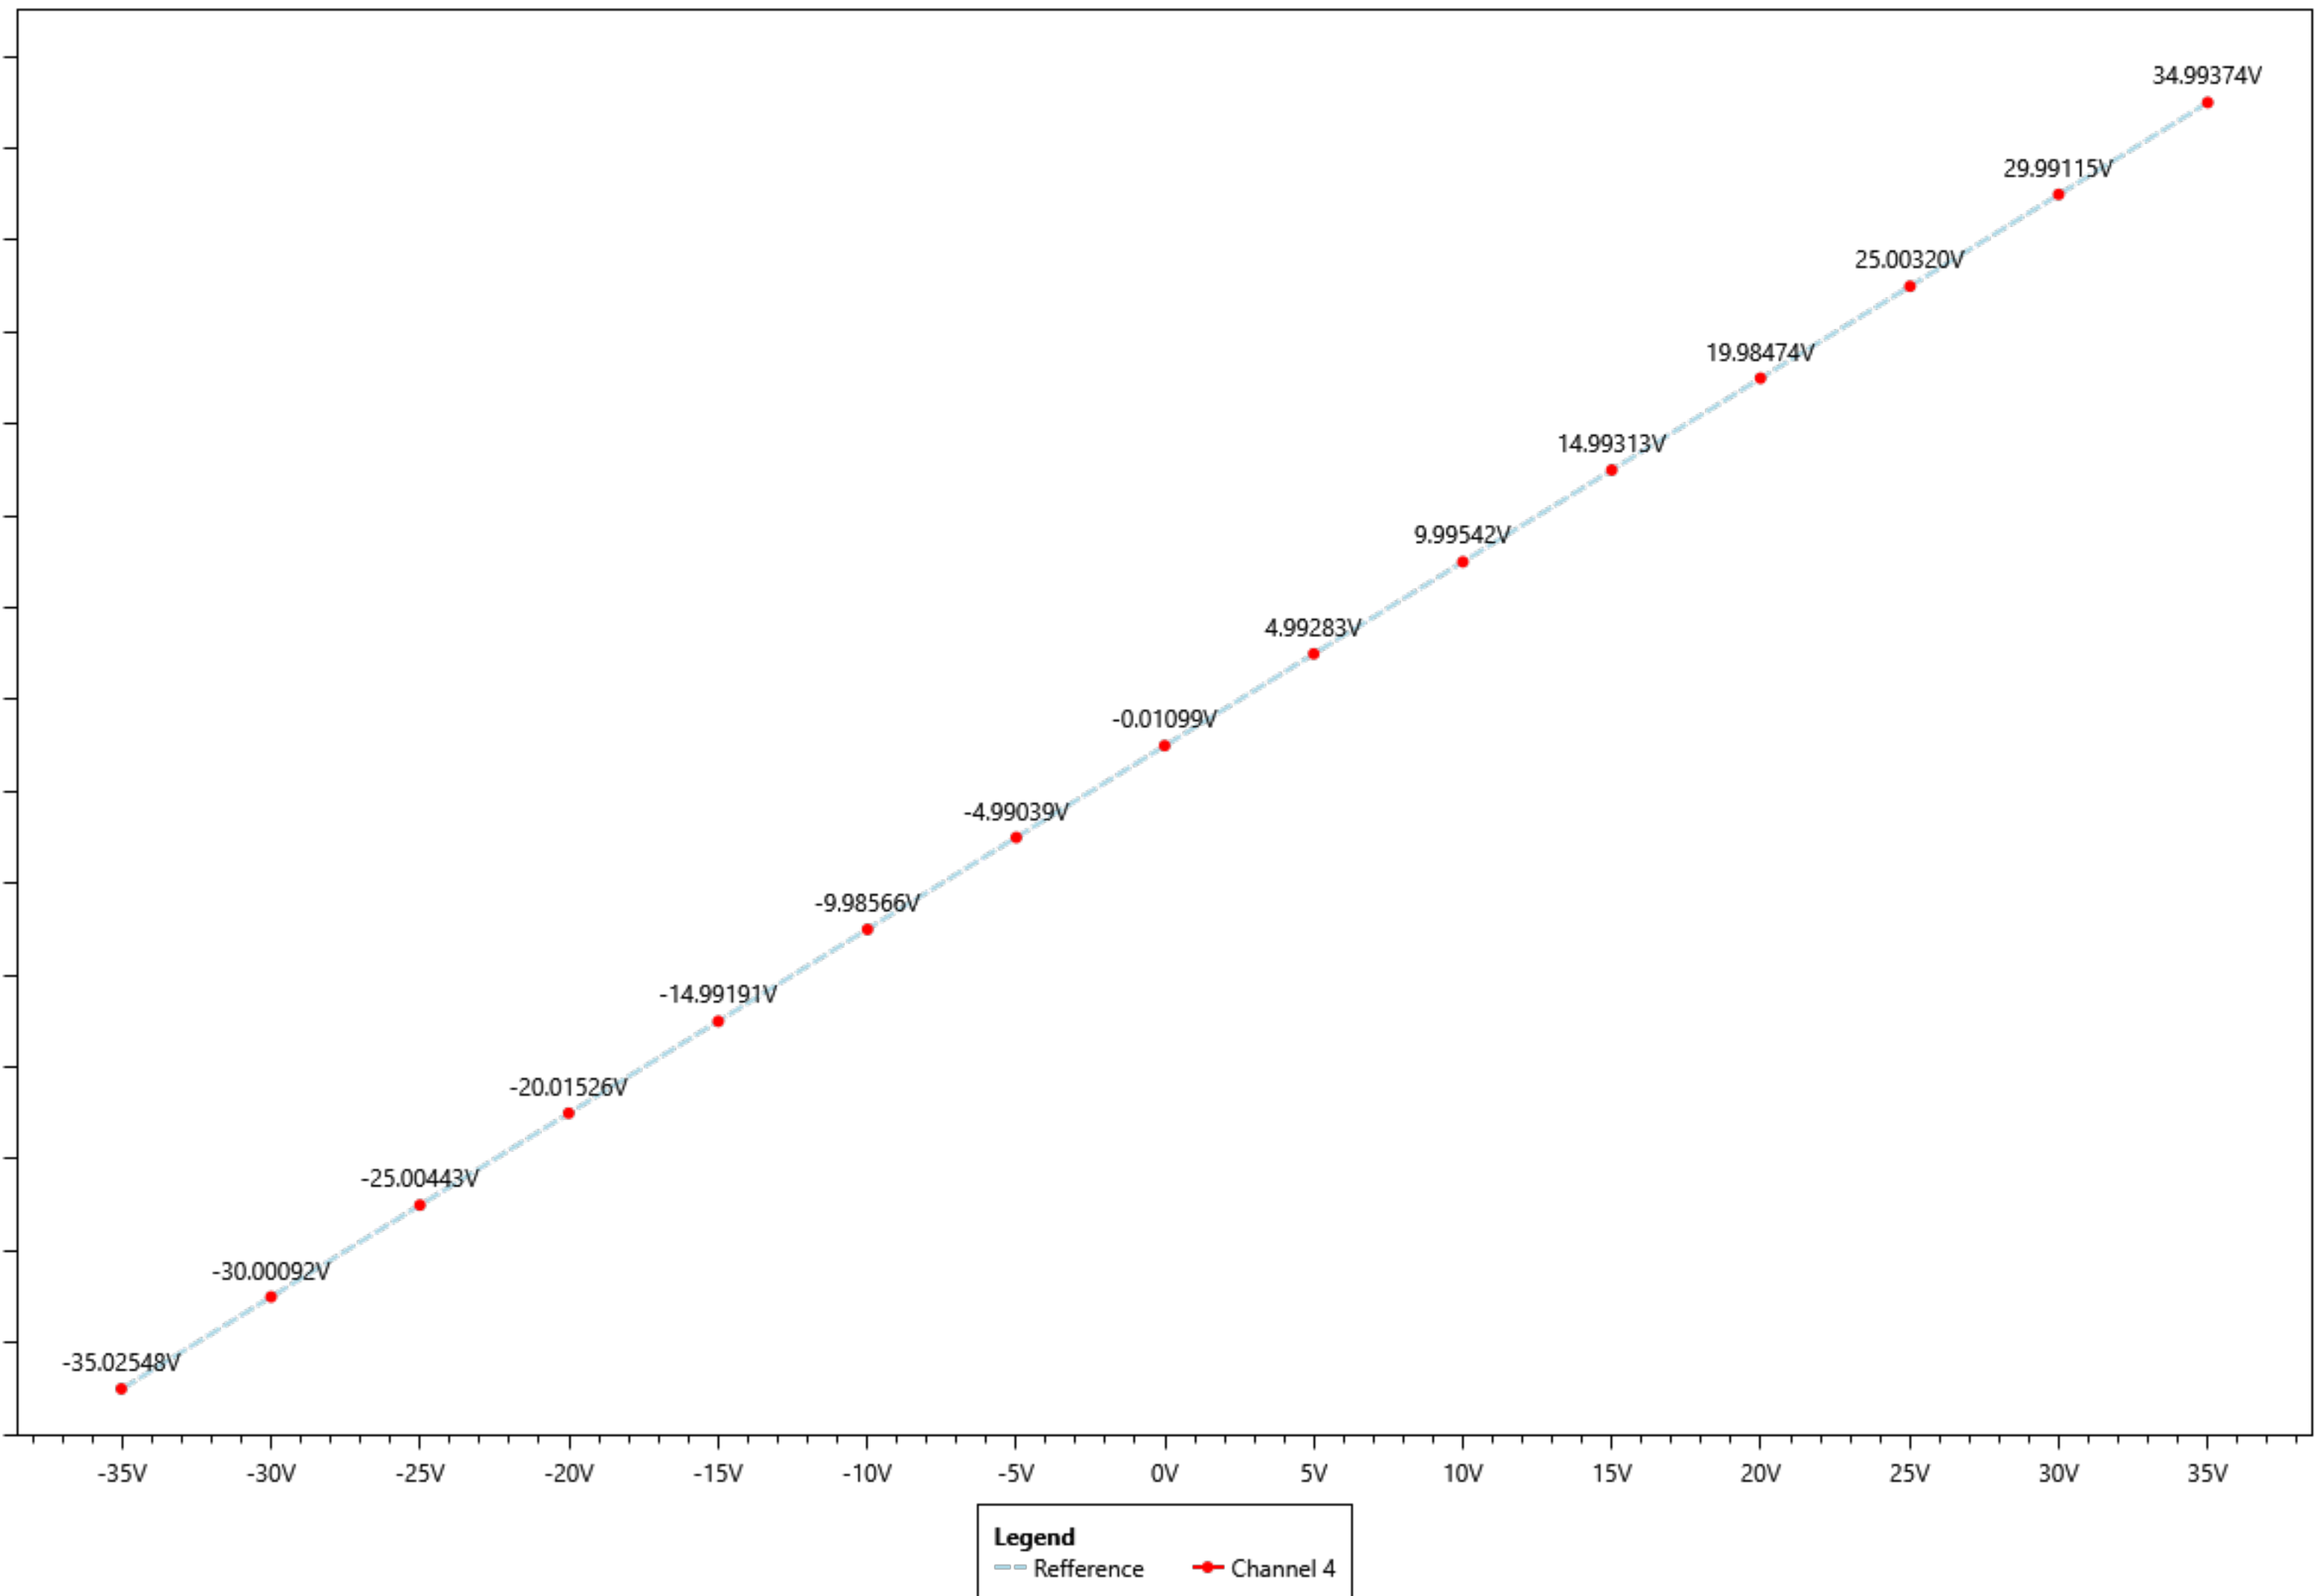

Channel 4 errors for Measurement

