WASA

POSITIVE DISPLACEMENT PUMPS

Tel: +27 (0)11 552 5938 Email: wasapumps@gmail.com










WASA	Typical Pump Performance Curve MAX. HEAD 450 METERS COLUMN 50 mm SHAFT 16 MM MIN. STARTING TORQUE 22 N.M TESTED ON WATER AT 20°C	**WA 03-6** NITRILE RUBBER



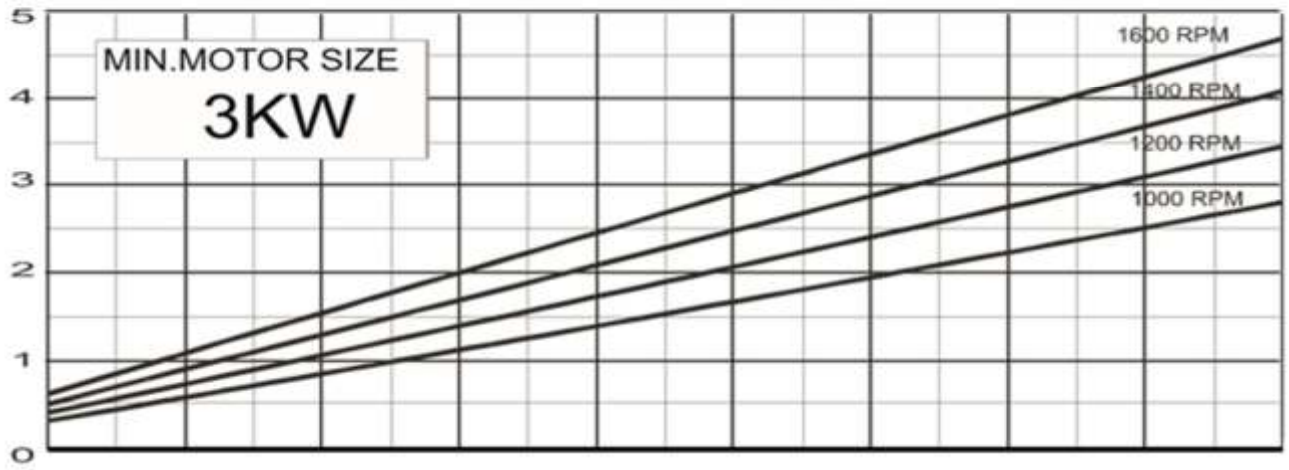


WASA	Typical Pump Performance Curve MAX. HEAD 75 METERS COLUMN 40 mm SHAFT 13 MM MIN. STARTING TORQUE 9 N.M TESTED ON WATER AT 20°C	**WA 04-1** NITRILE RUBBER

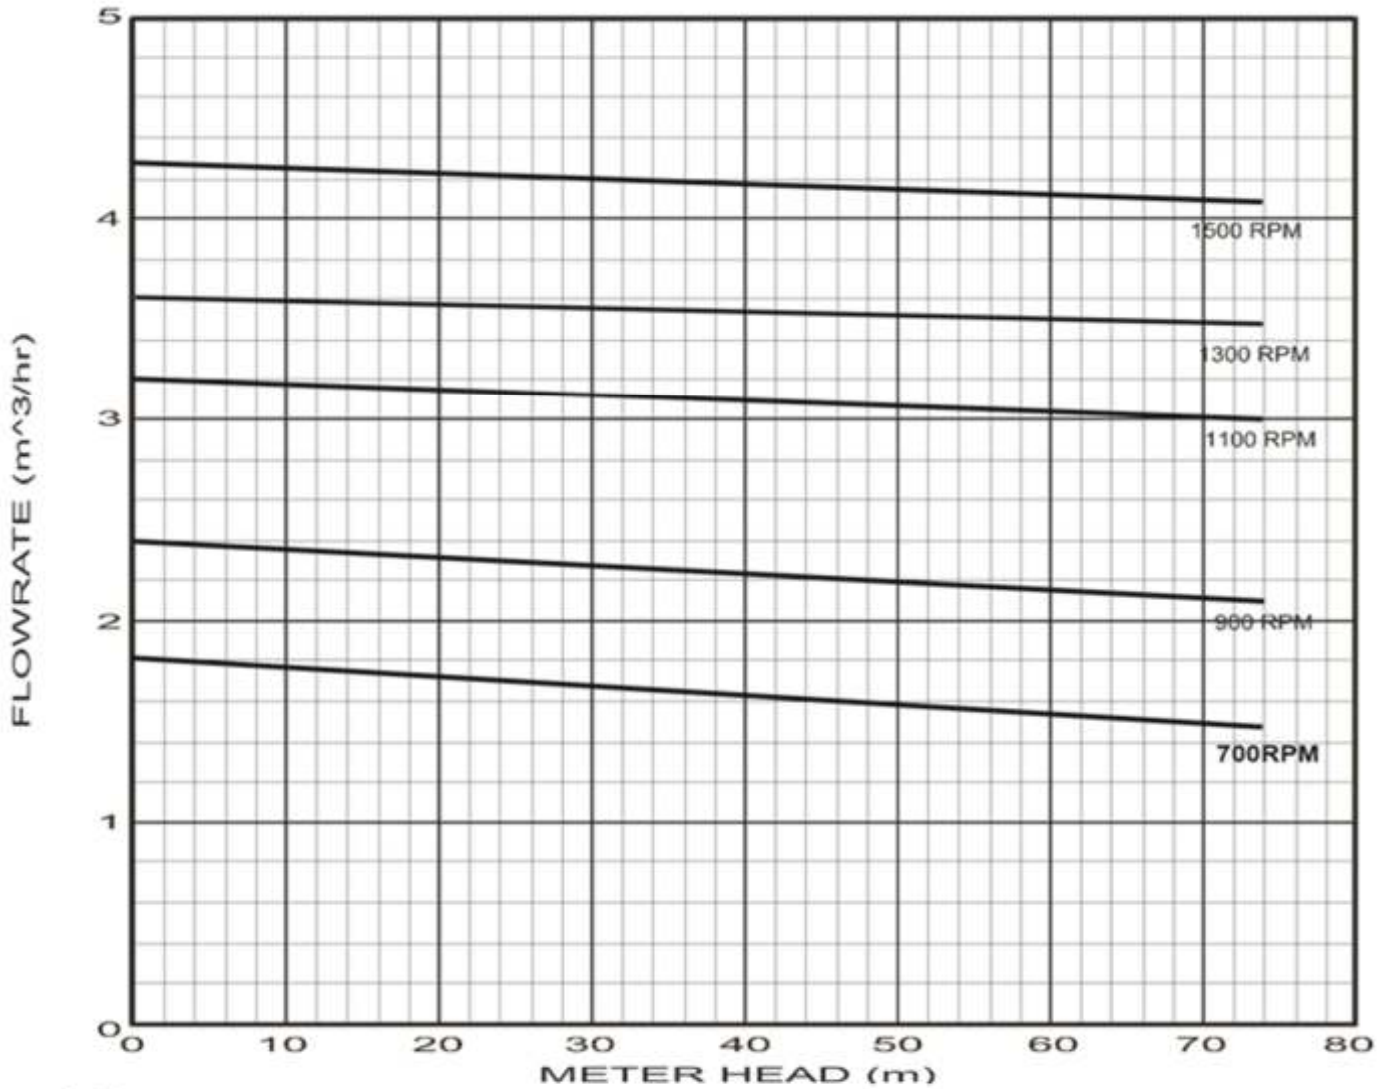

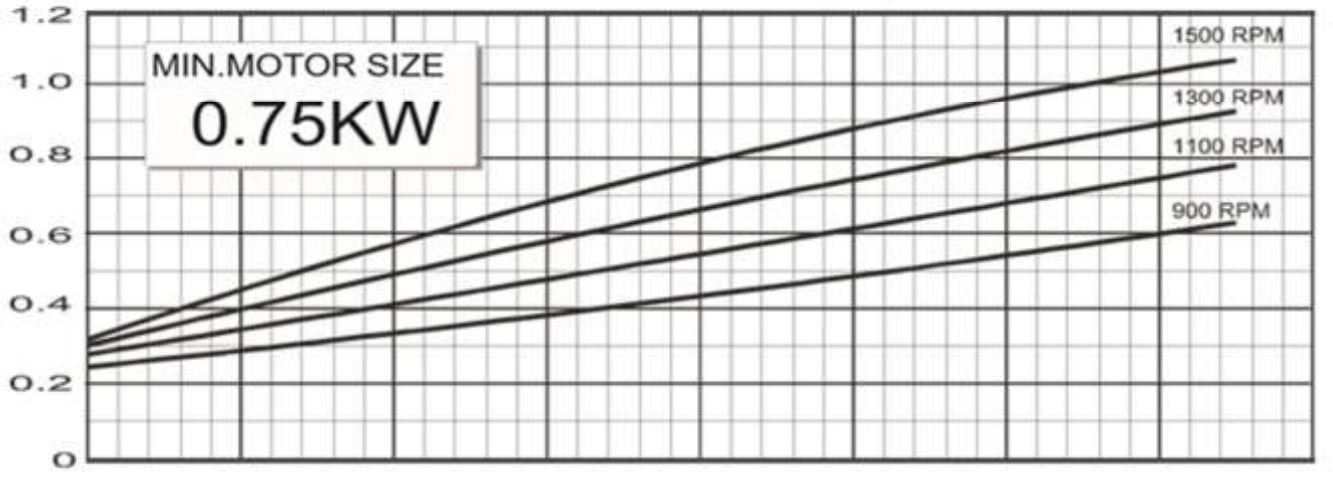



WASA	Typical Pump Performance Curve MAX. HEAD 180 METERS COLUMN 40 MM to 100 M - 13 MM shaft COLUMN 50 MM to 180 M - 16 MM shaft MIN. STARTING TORQUE 13 N.M TESTED ON WATER AT 20°C	**WA 04-2** NITRILE RUBBER

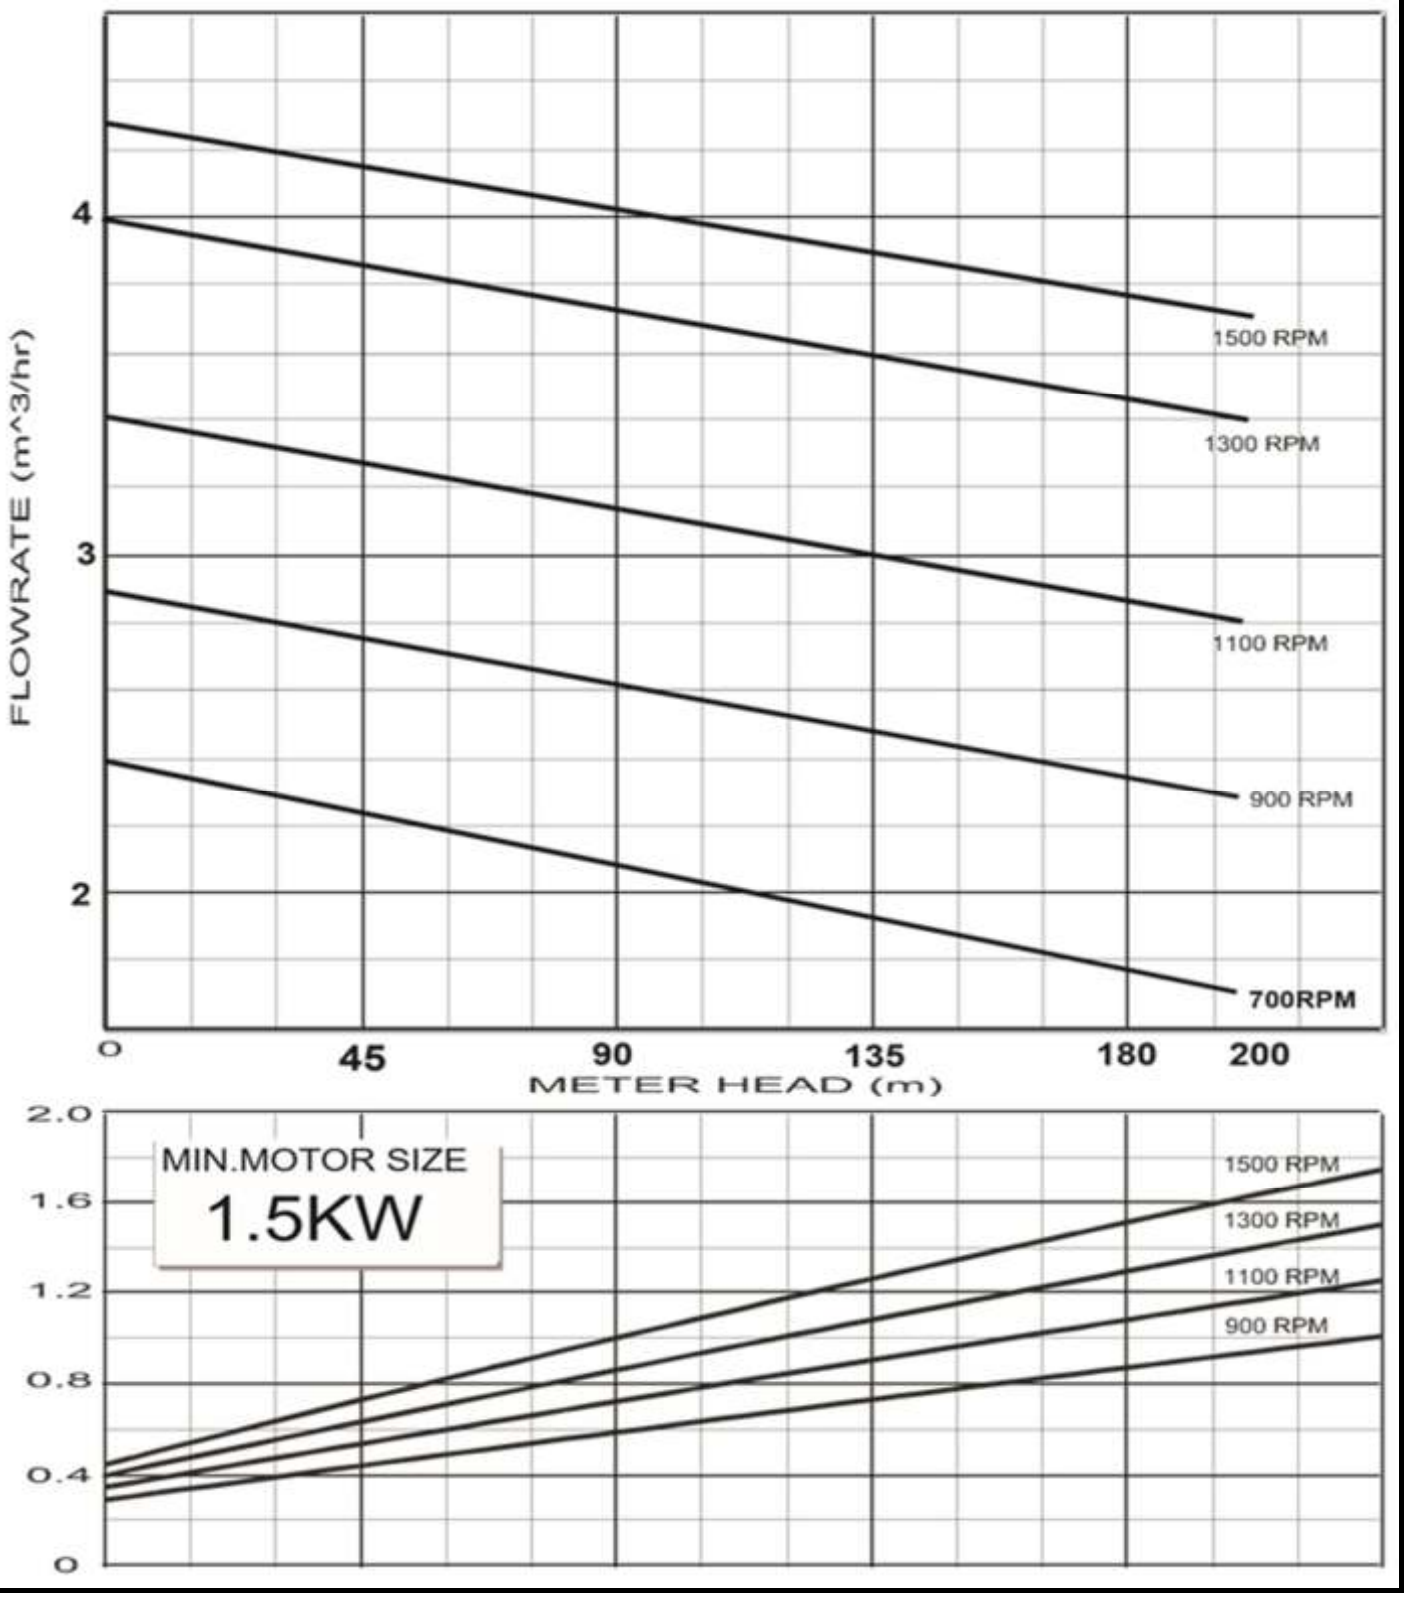


Typical Pump Performance Curve	
MAX. HEAD 300 METERS	
COLUMN 40 MM to 100 M - 13 MM shaft	
COLUMN 50 MM to 300 M - 16 MM shaft	
MIN. STARTING TORQUE 15 N.M	
TESTED ON WATER AT 20°C	NITRILE RUBBER


WA 04-4

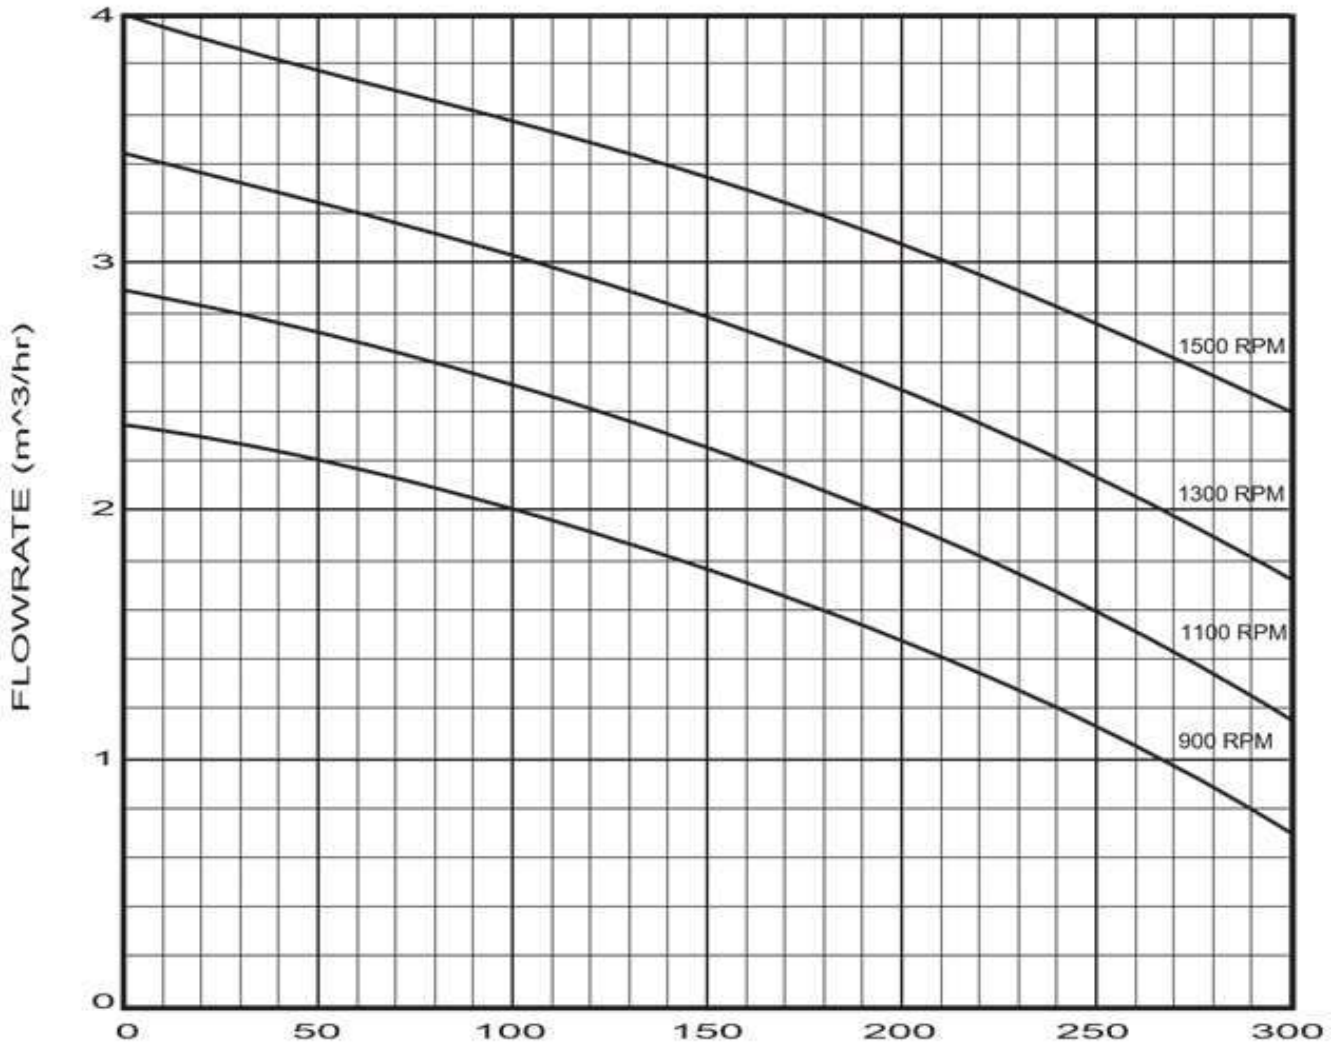

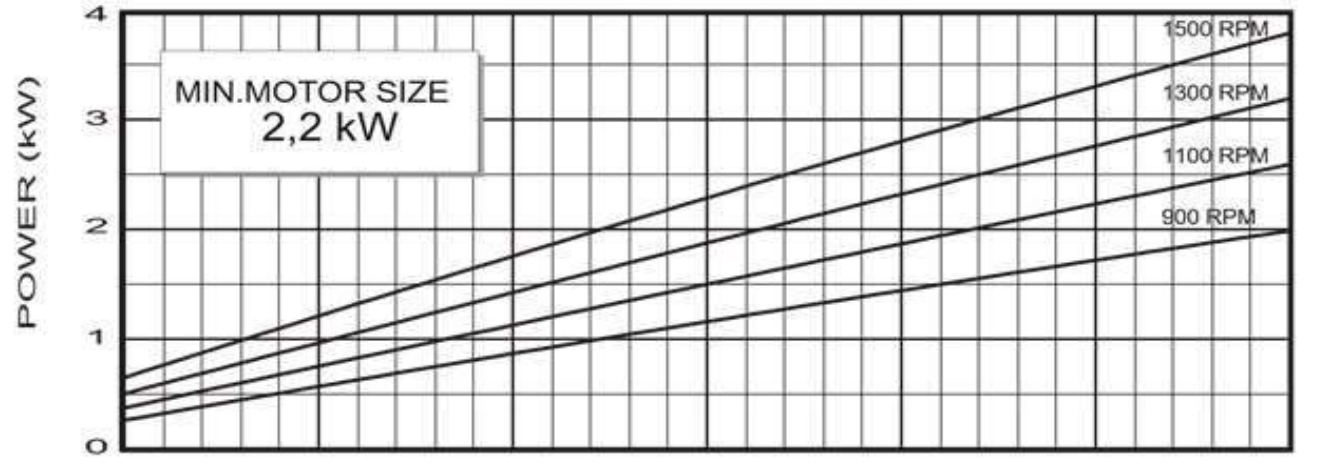



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 50 MM SHAFT 16 MM MIN. STARTING TORQUE 13 N.M TESTED ON WATER AT 20°C	**WA 07-2** NITRILE RUBBER

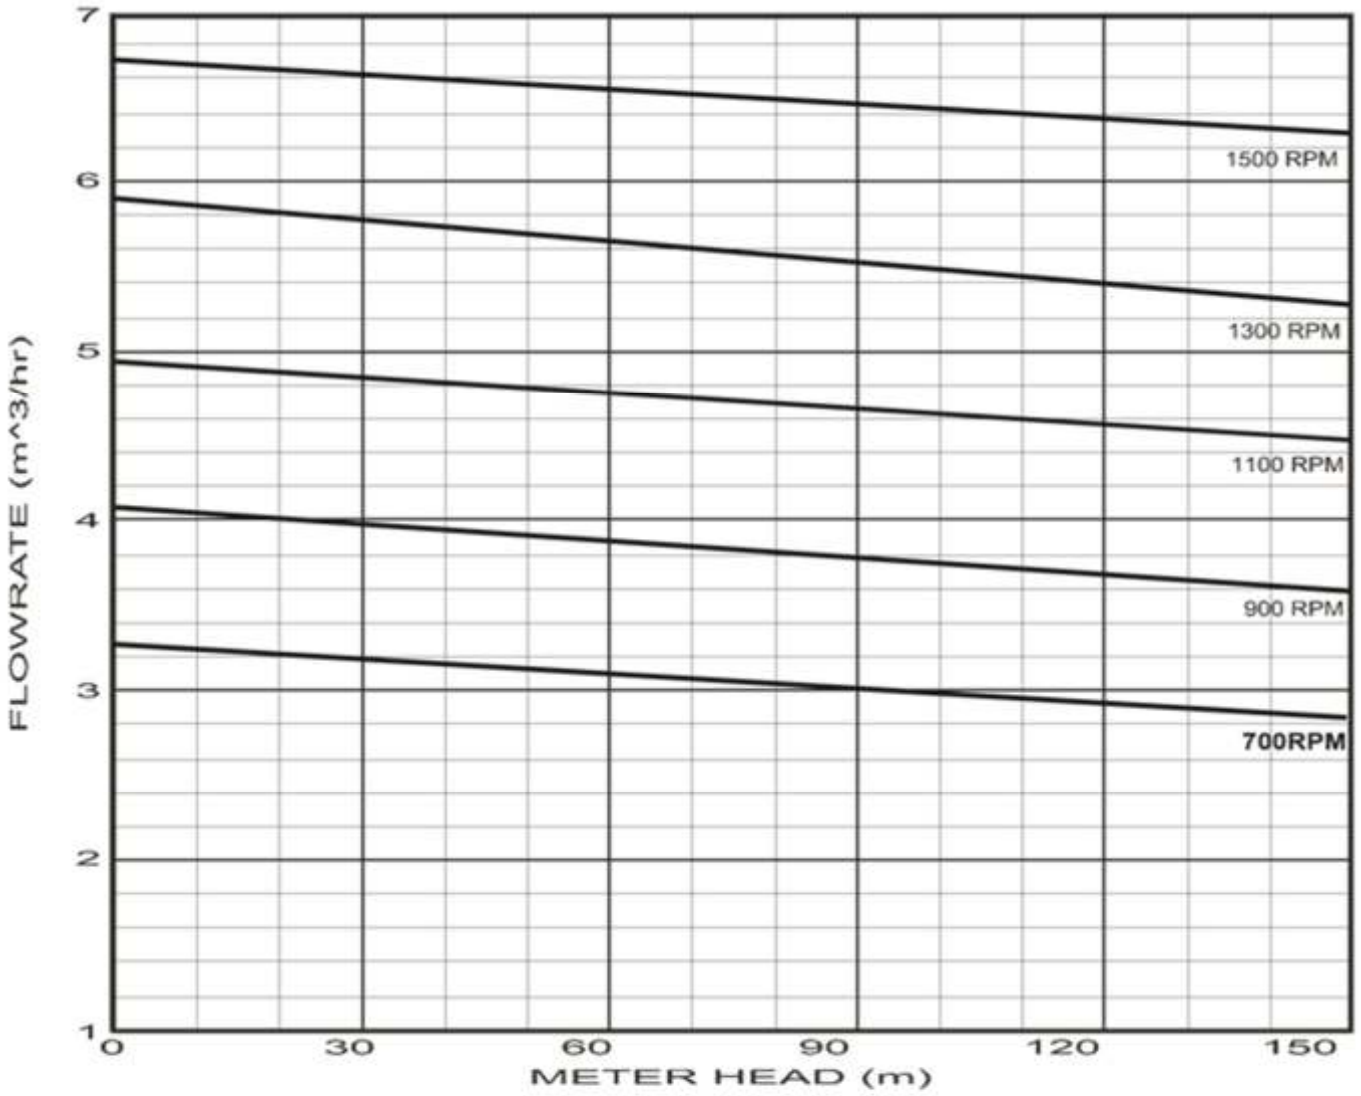

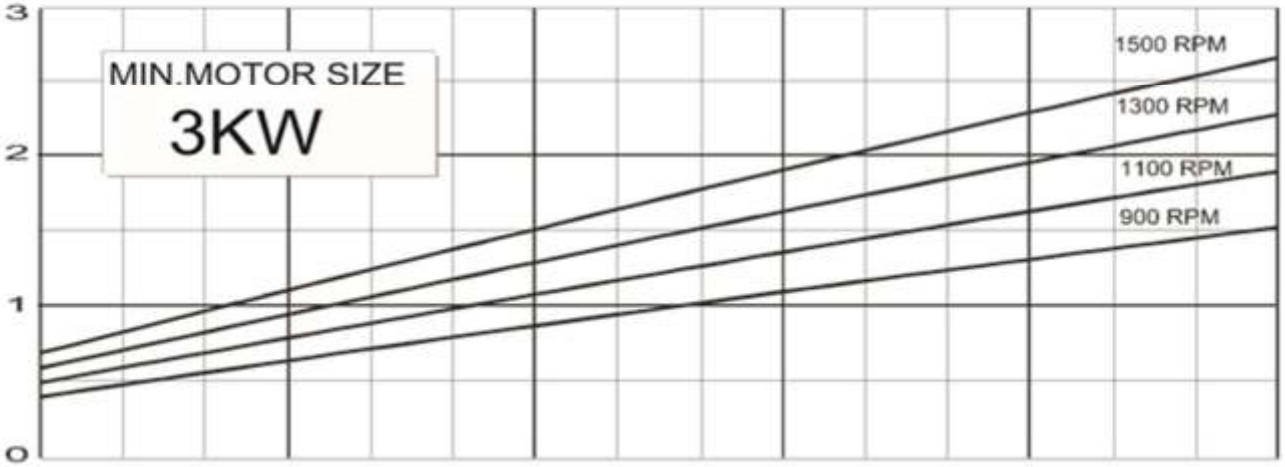

WASA	Typical Pump Performance Curve MAX. HEAD 225 METERS COLUMN 50 MM SHAFT 16 MM MIN. STARTING TORQUE 18 N.M TESTED ON WATER AT 20°C	**WA 07-3** NITRILE RUBBER

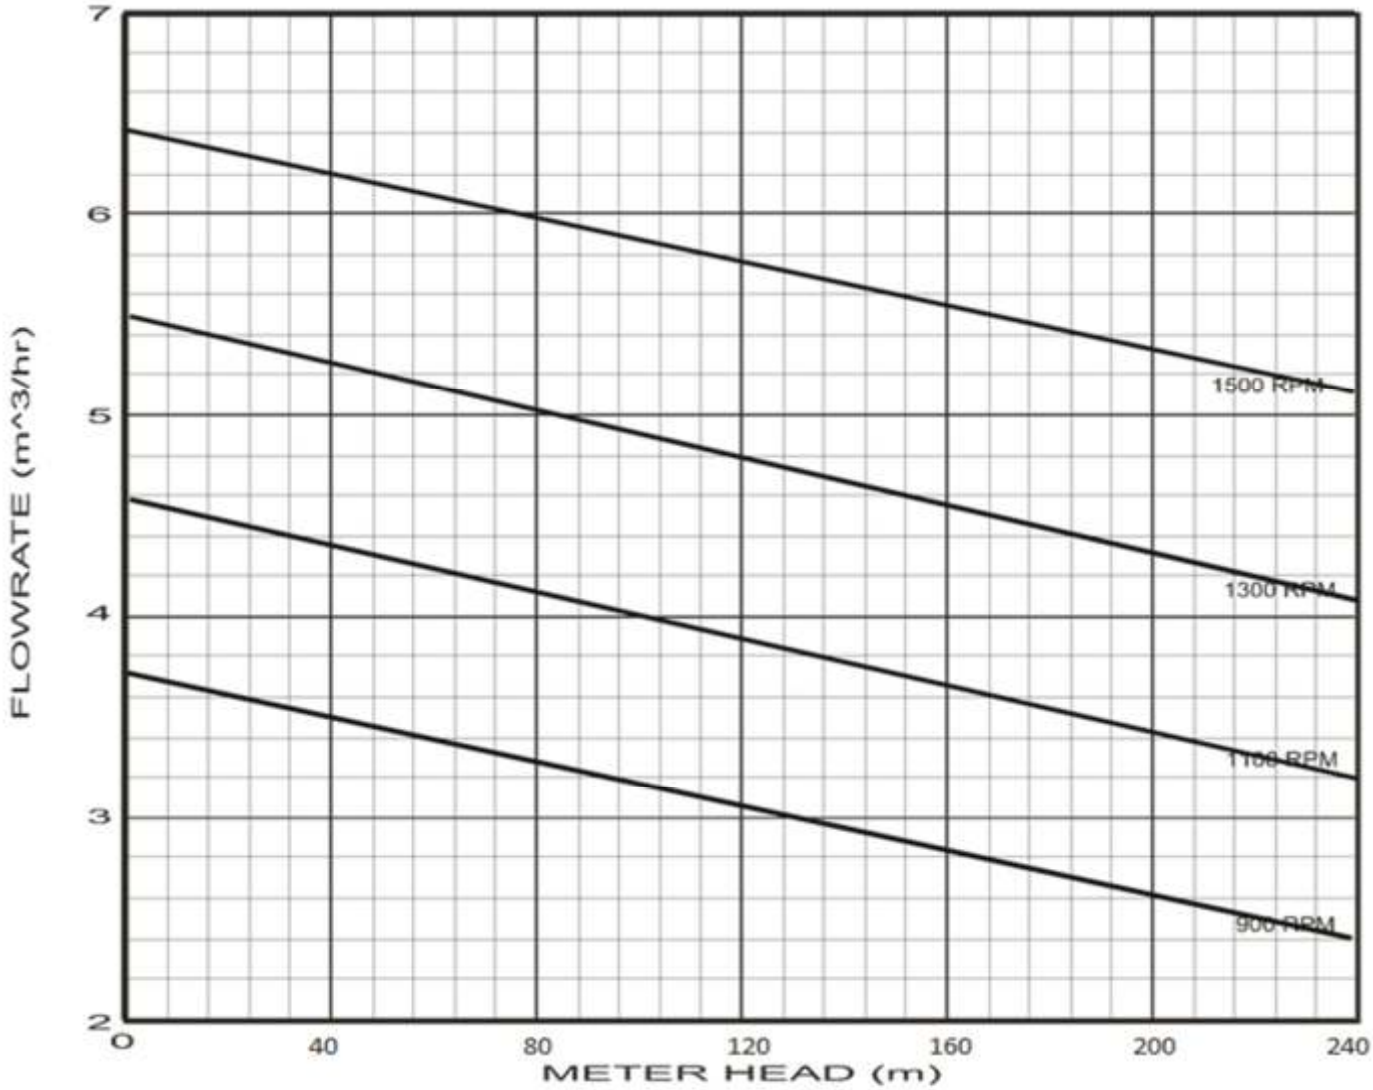


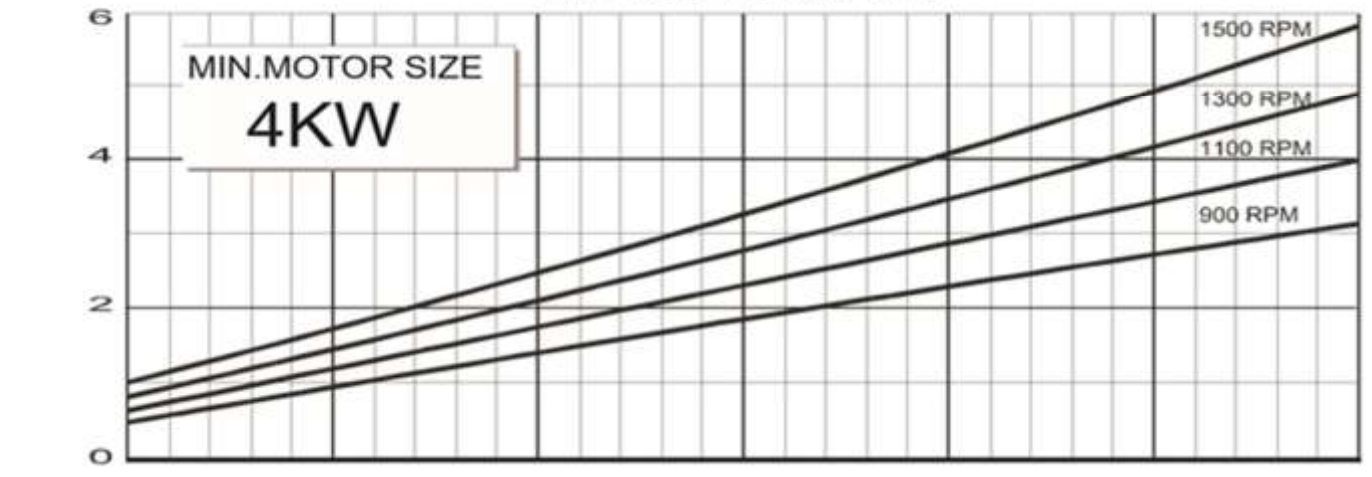


Typical Pump Performance Curve	
MAX. HEAD 300 METERS	
COLUMN 50 MM	
SHAFT 16 MM	
MIN. STARTING TORQUE 24 N.M	
TESTED ON WATER AT 20°C	


WA 07-5


NITRILE RUBBER

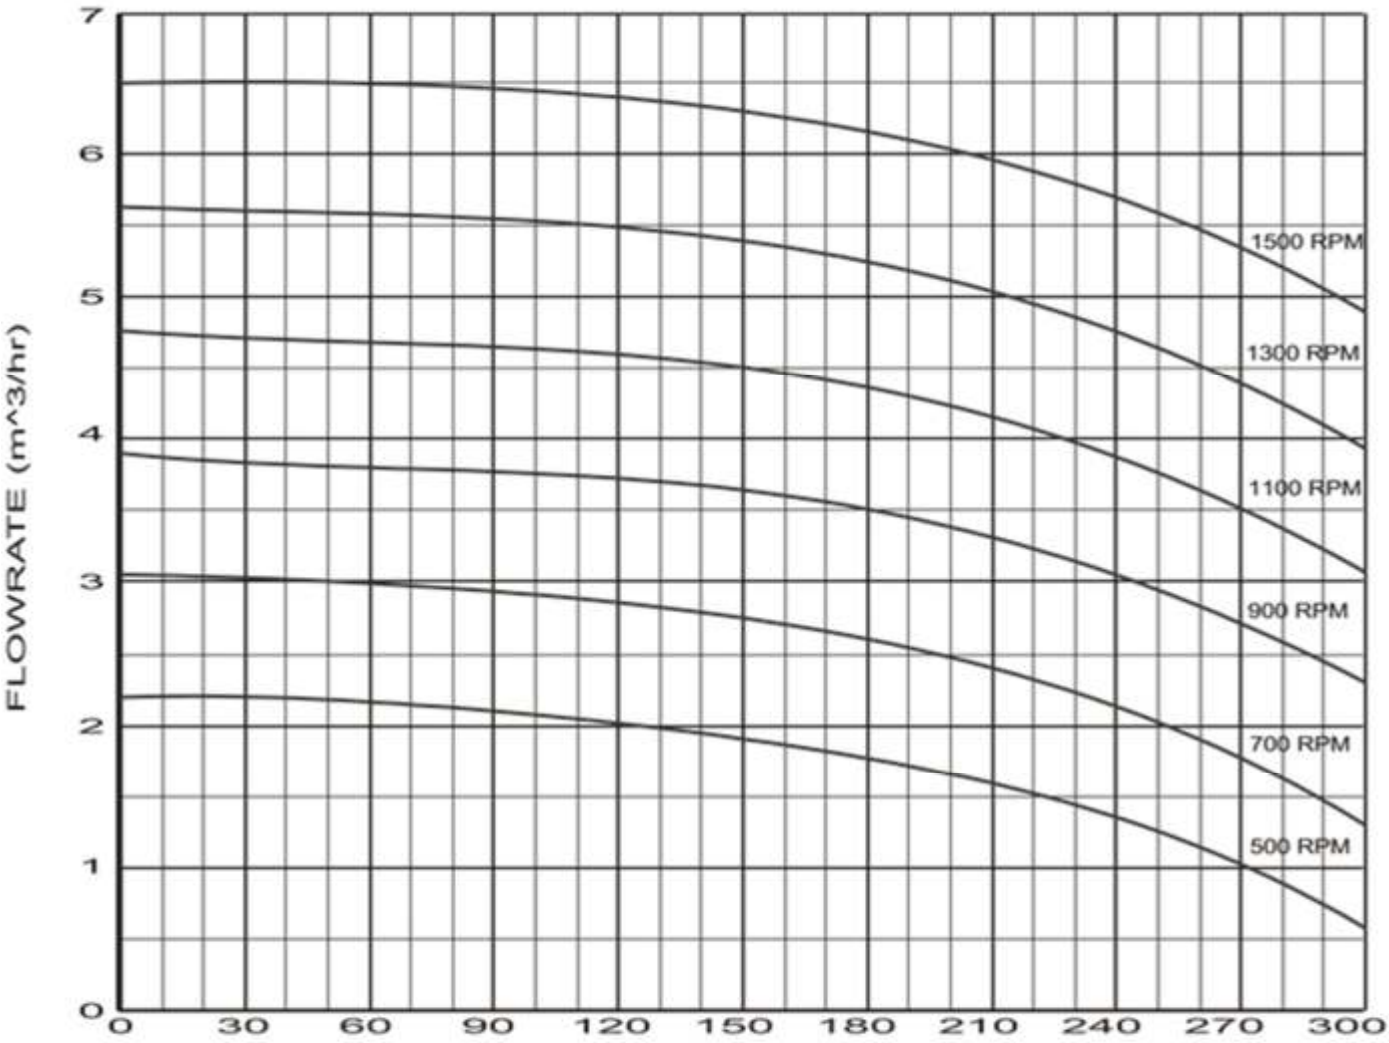

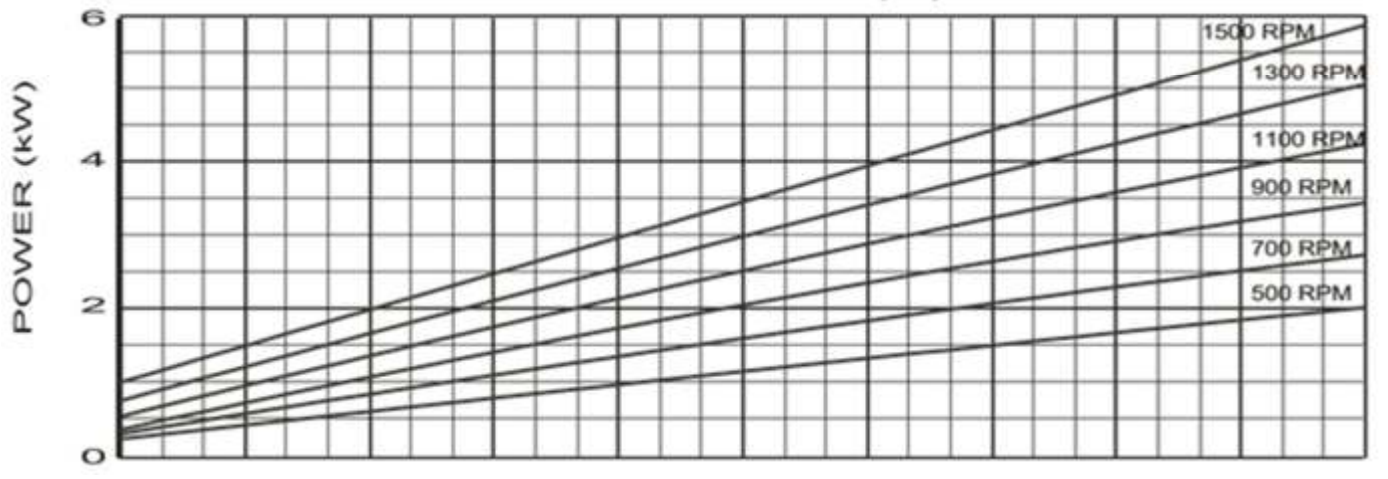



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 50 MM SHAFT 16 MM MIN. STARTING TORQUE 13 N.M TESTED ON WATER AT 20°C	**WA 10-2** NITRILE RUBBER

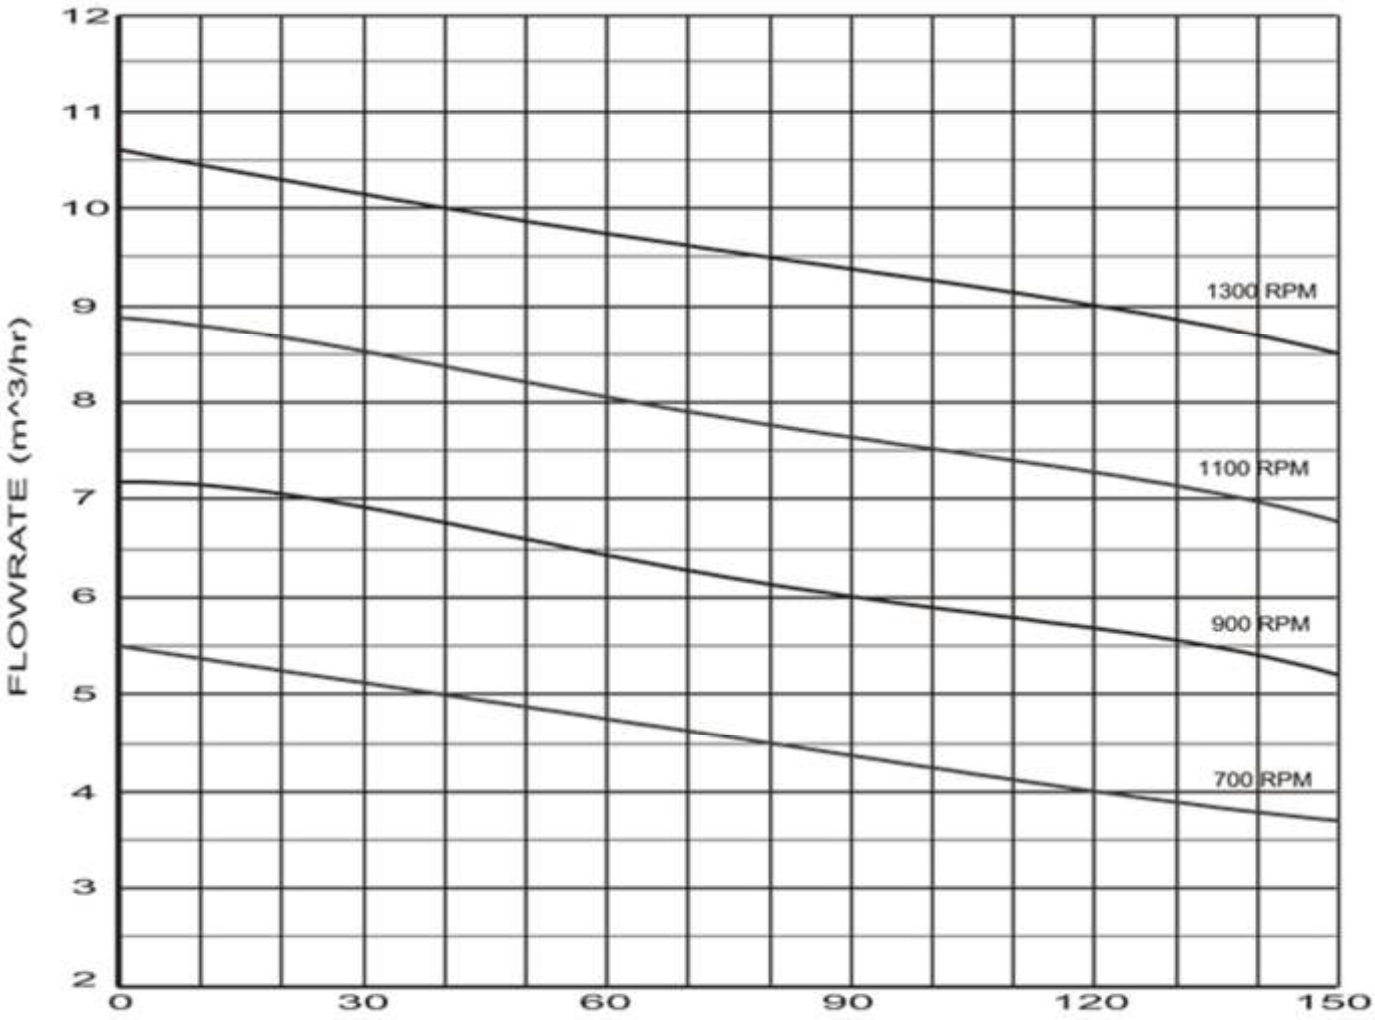

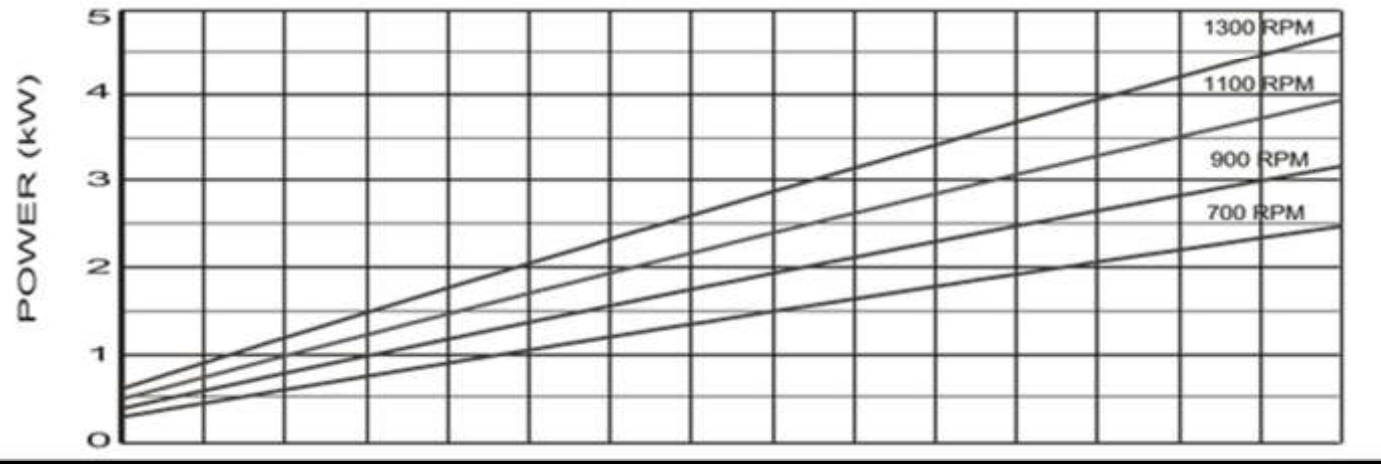



WASA	Typical Pump Performance Curve	WA 12-1
	MAX. HEAD 75 METERS	
	COLUMN 50 MM	
	SHAFT 16 MM	
	MIN. STARTING TORQUE 13 N.M	
	TESTED ON WATER AT 20°C	NITRILE RUBBER

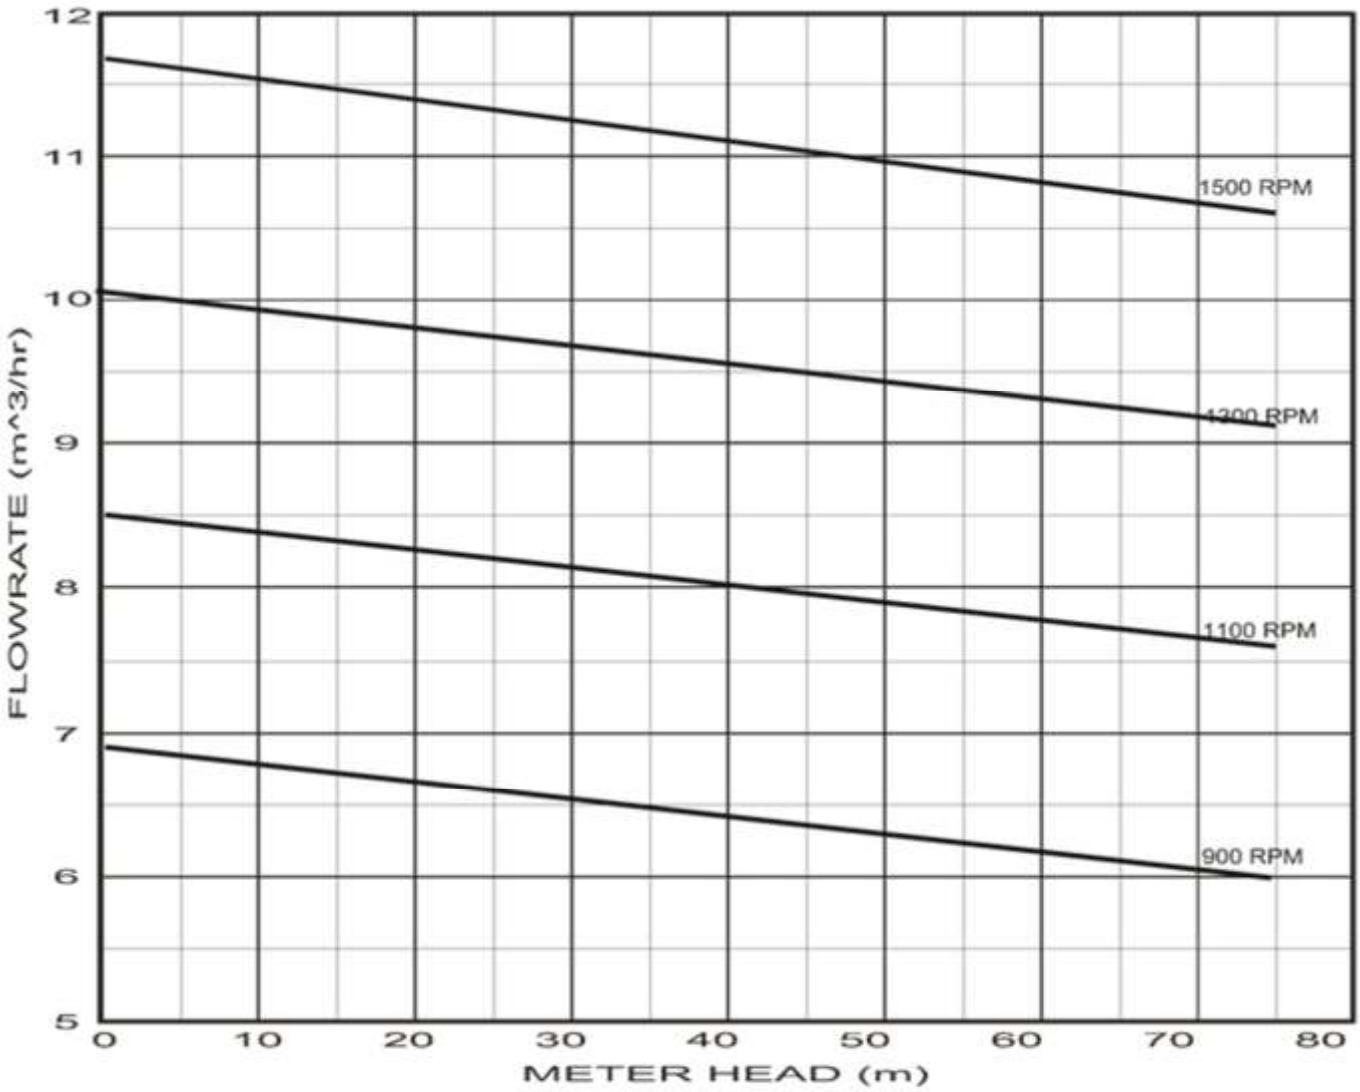

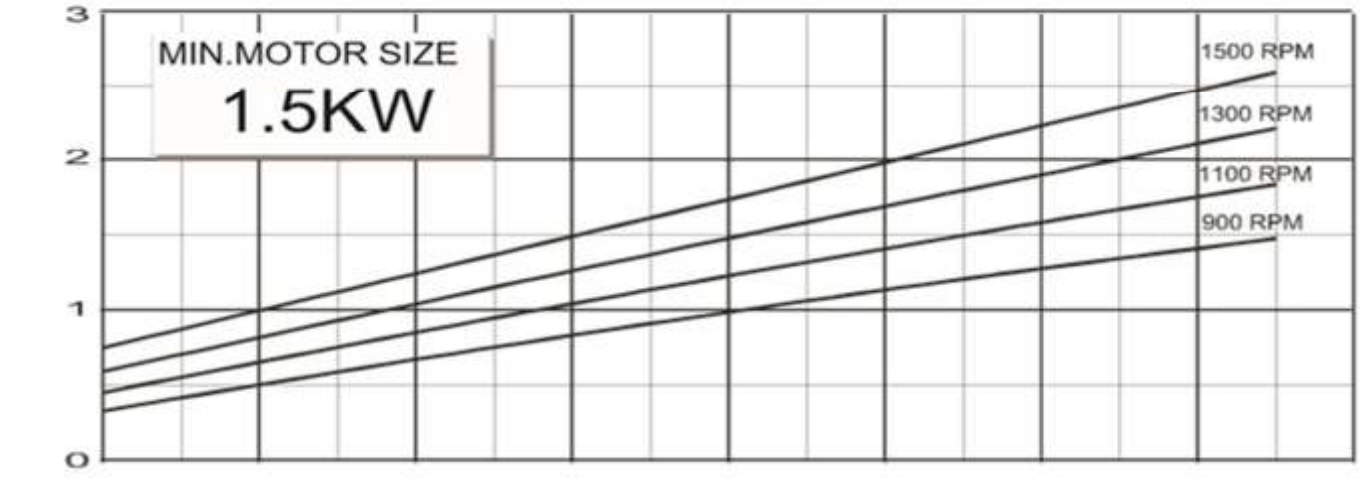



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 50 MM SHAFT 16 MM MIN. STARTING TORQUE 15 N.M TESTED ON WATER AT 20°C	**WA 12-2** NITRILE RUBBER

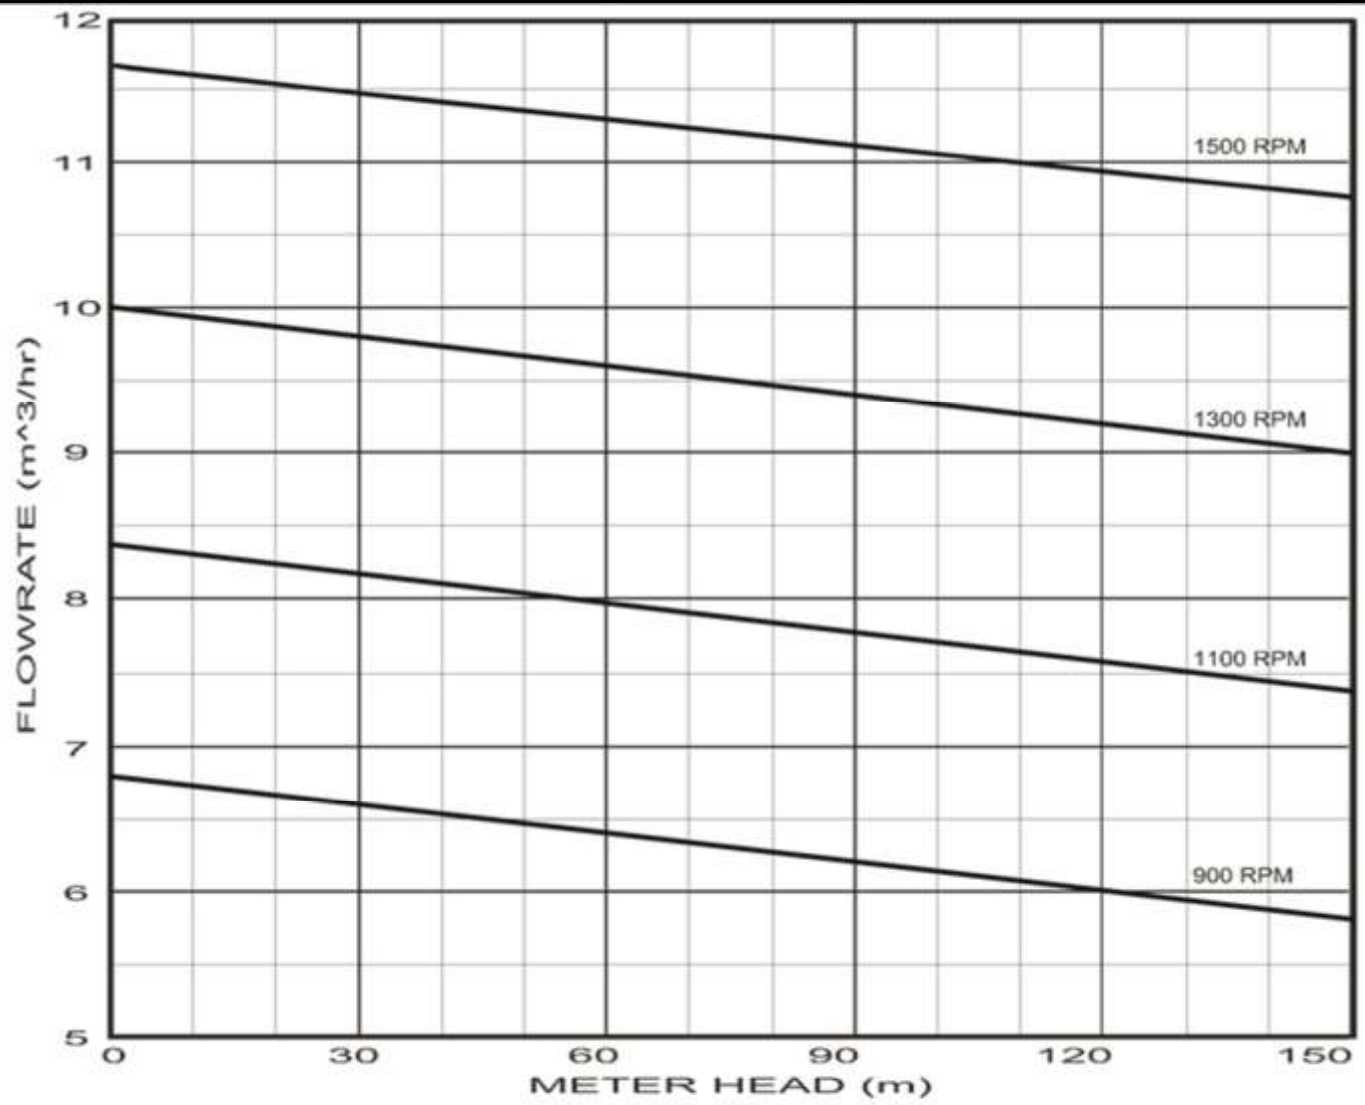

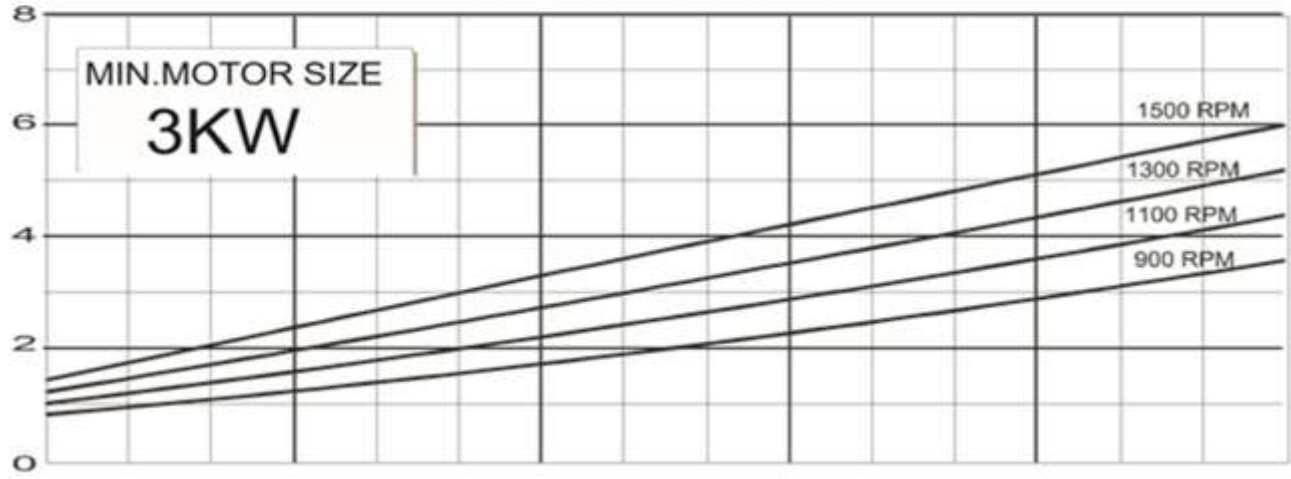



WASA	Typical Pump Performance Curve MAX. HEAD 300 METERS COLUMN 50 MM to 150 M - 16 MM shaft COLUMN 65 MM to 300 M - 19 MM shaft MIN. STARTING TORQUE 22 N.M TESTED ON WATER AT 20°C	**WA 12-4** NITRILE RUBBER

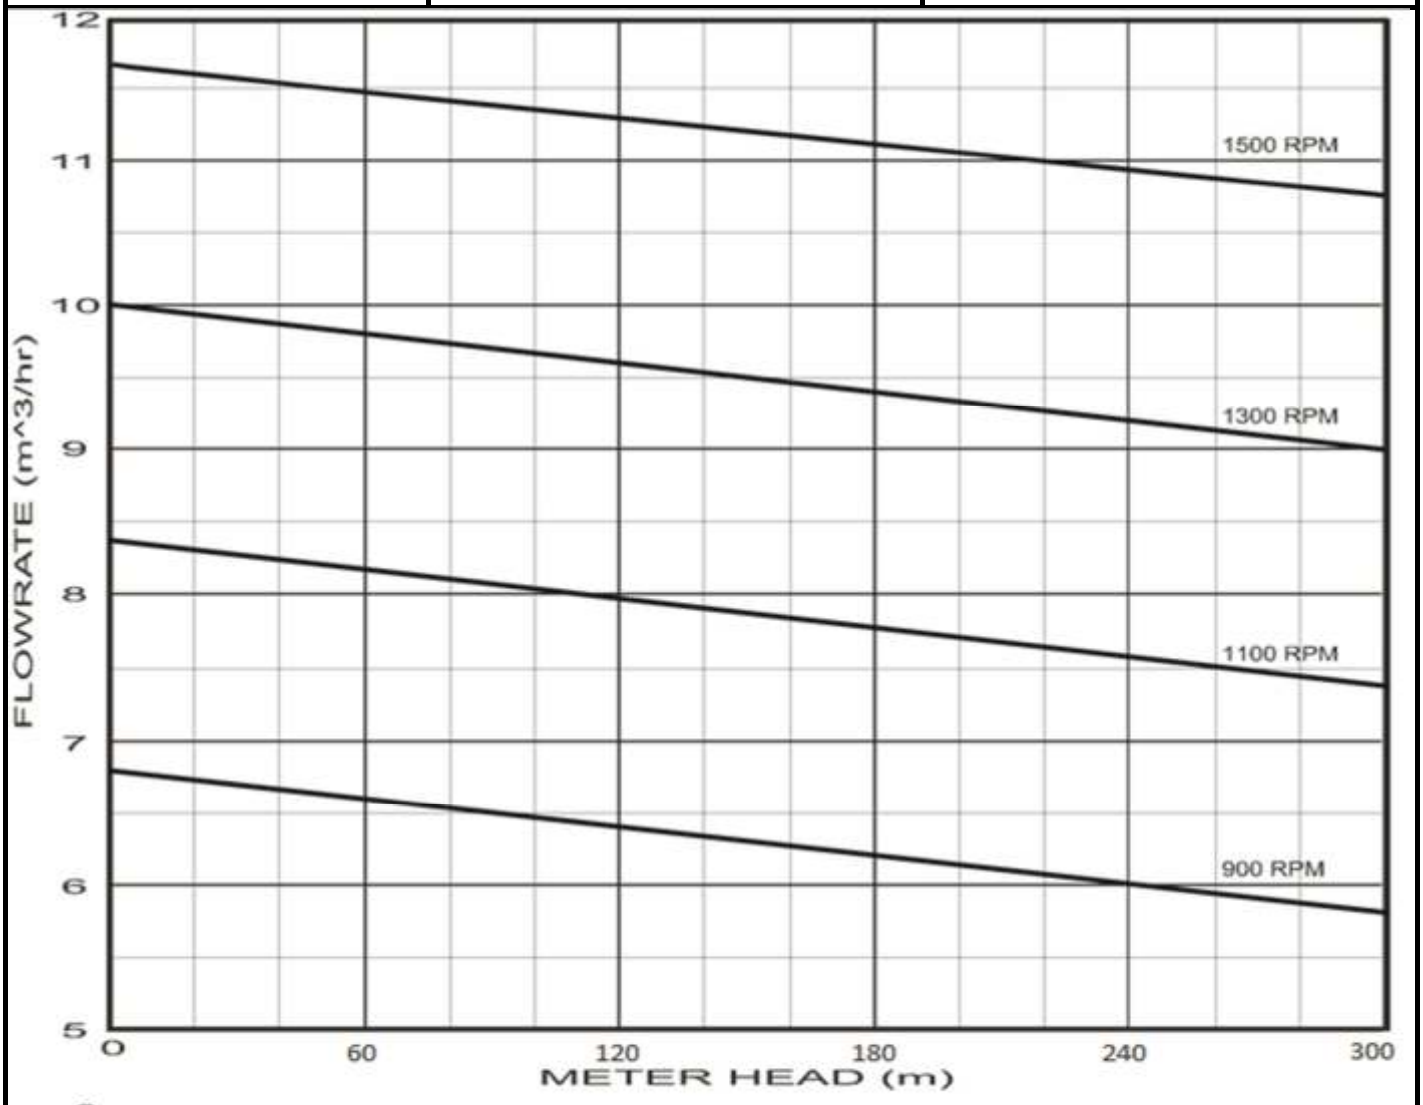

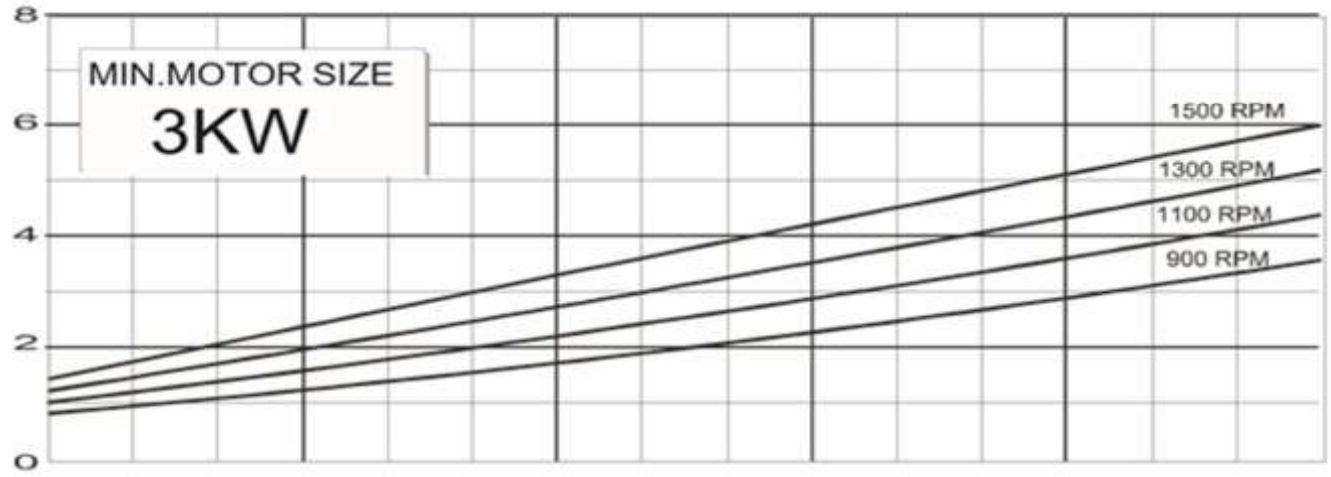



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 65 MM SHAFT 19 MM MIN. STARTING TORQUE 30 N.M TESTED ON WATER AT 20°C	WA 16-2 NITRILE RUBBER

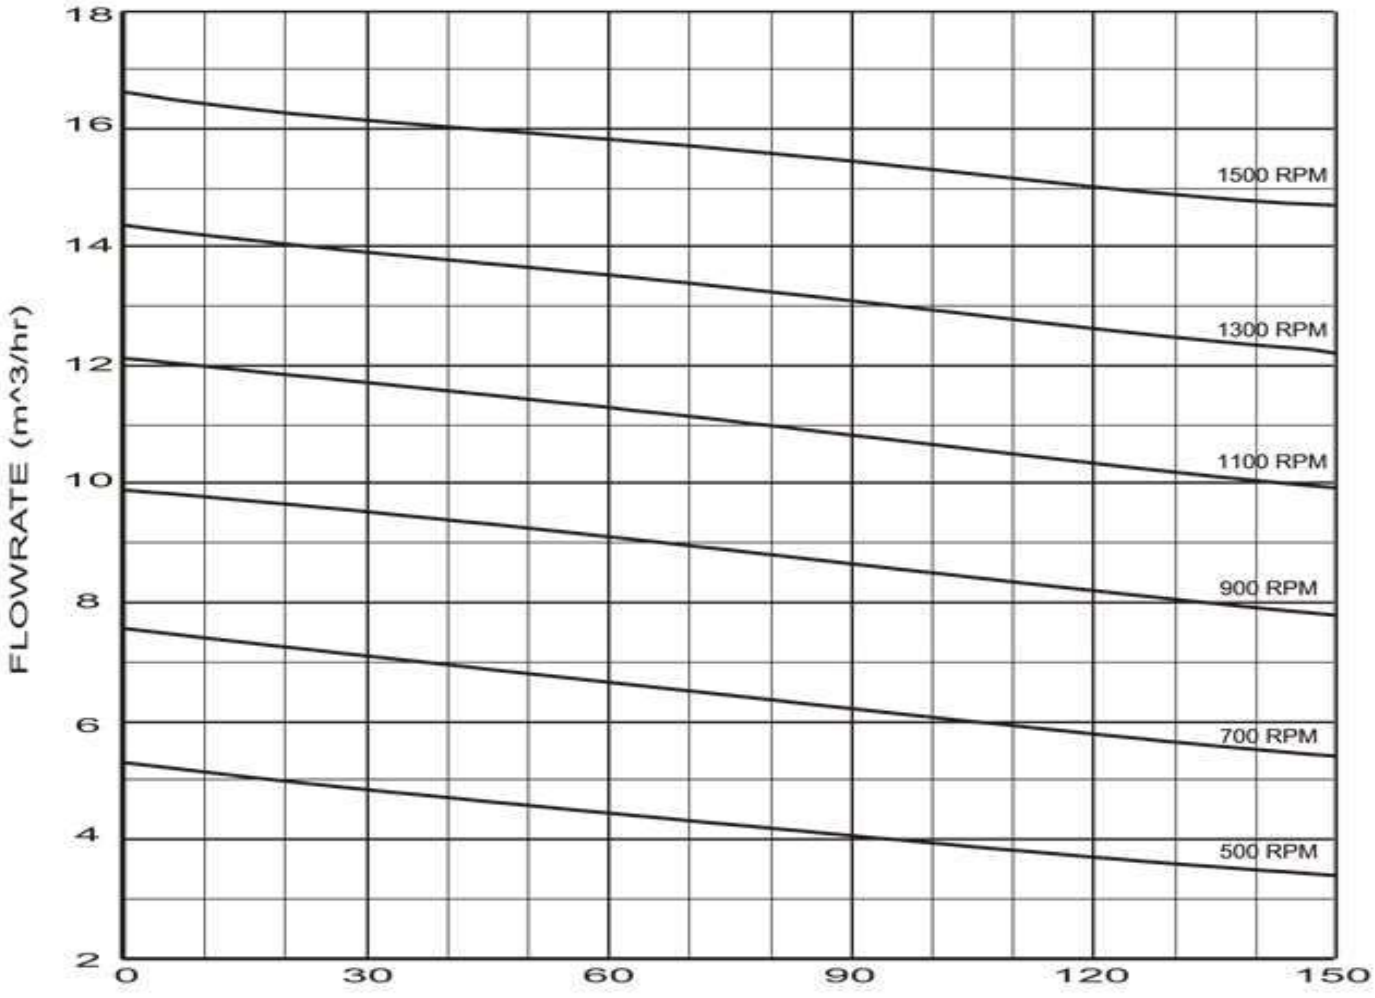

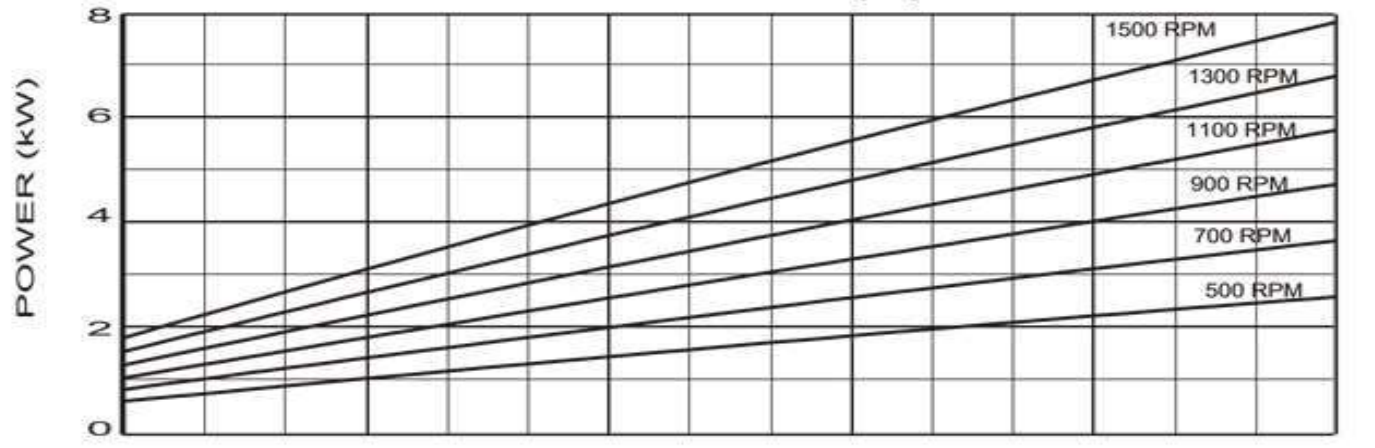



WASA	Typical Pump Performance Curve	WA 22-1
	MAX. HEAD 75 METERS	
	COLUMN 65 MM	
	SHAFT 19 MM	
	MIN. STARTING TORQUE 18 N.M	
	TESTED ON WATER AT 20°C	NITRILE RUBBER

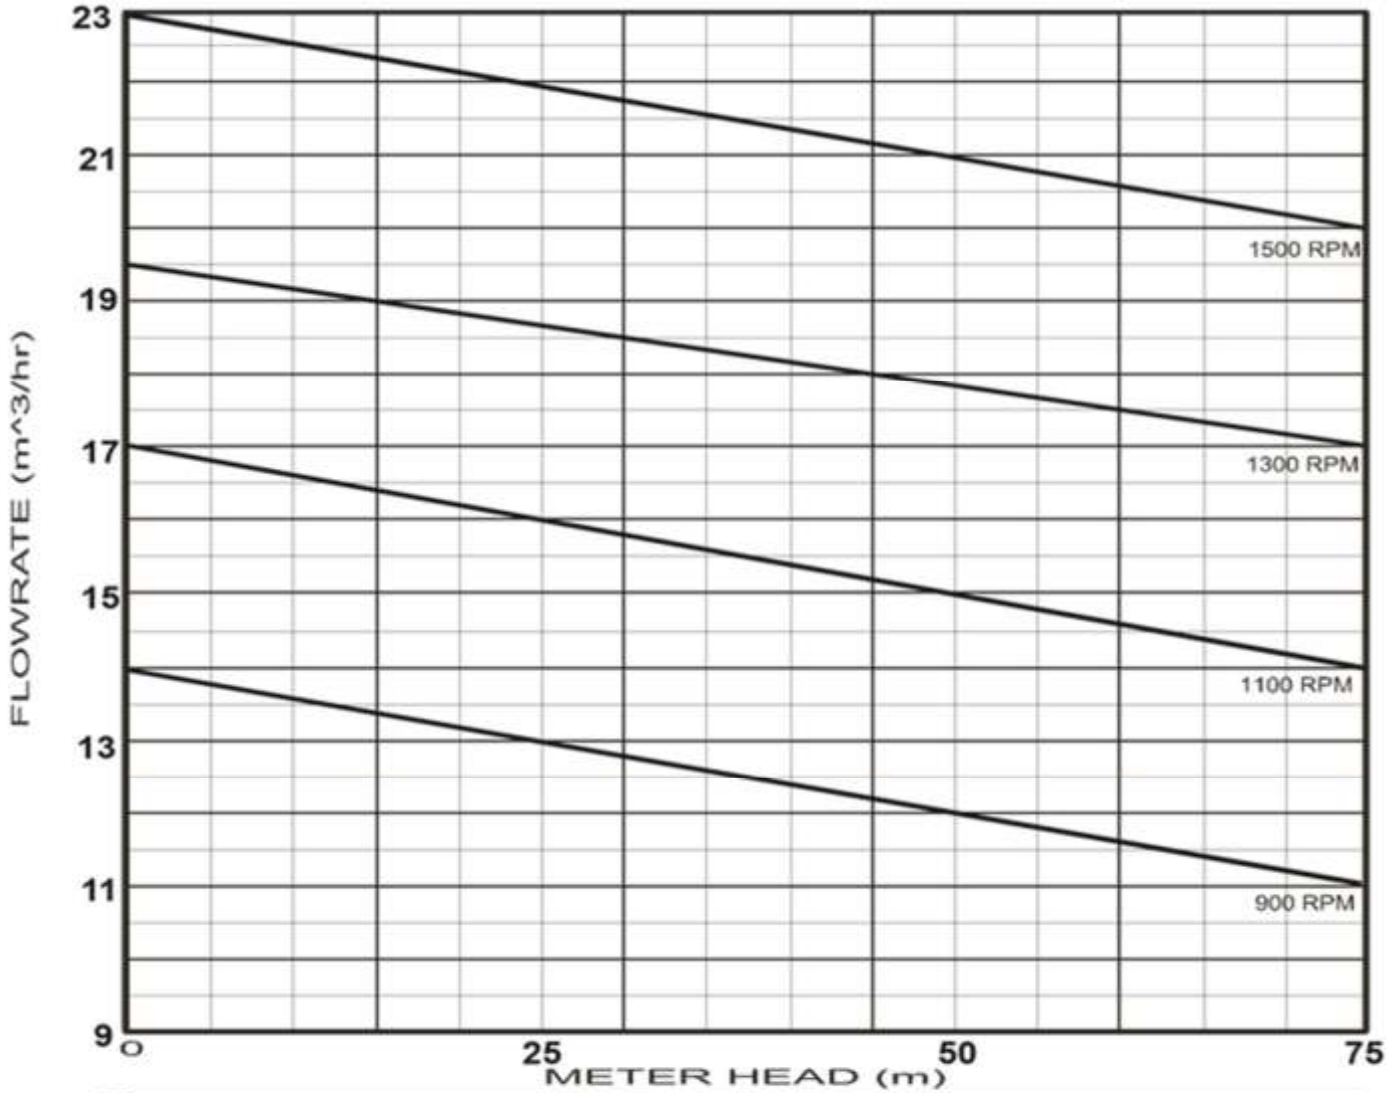

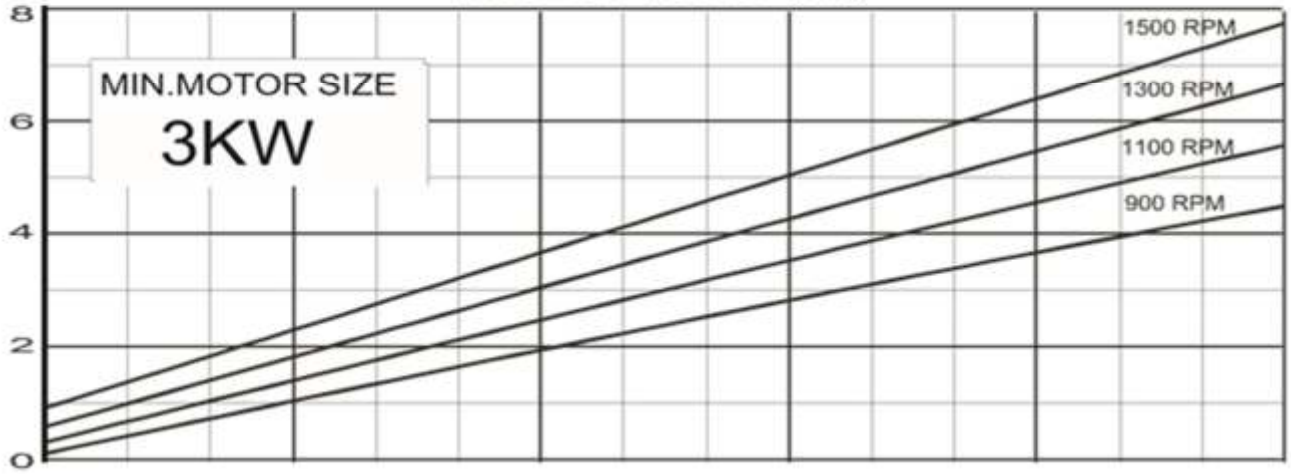



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 65 MM SHAFT 19 MM MIN. STARTING TORQUE 18 N.M TESTED ON WATER AT 20°C	WA 22-2 NITRILE RUBBER

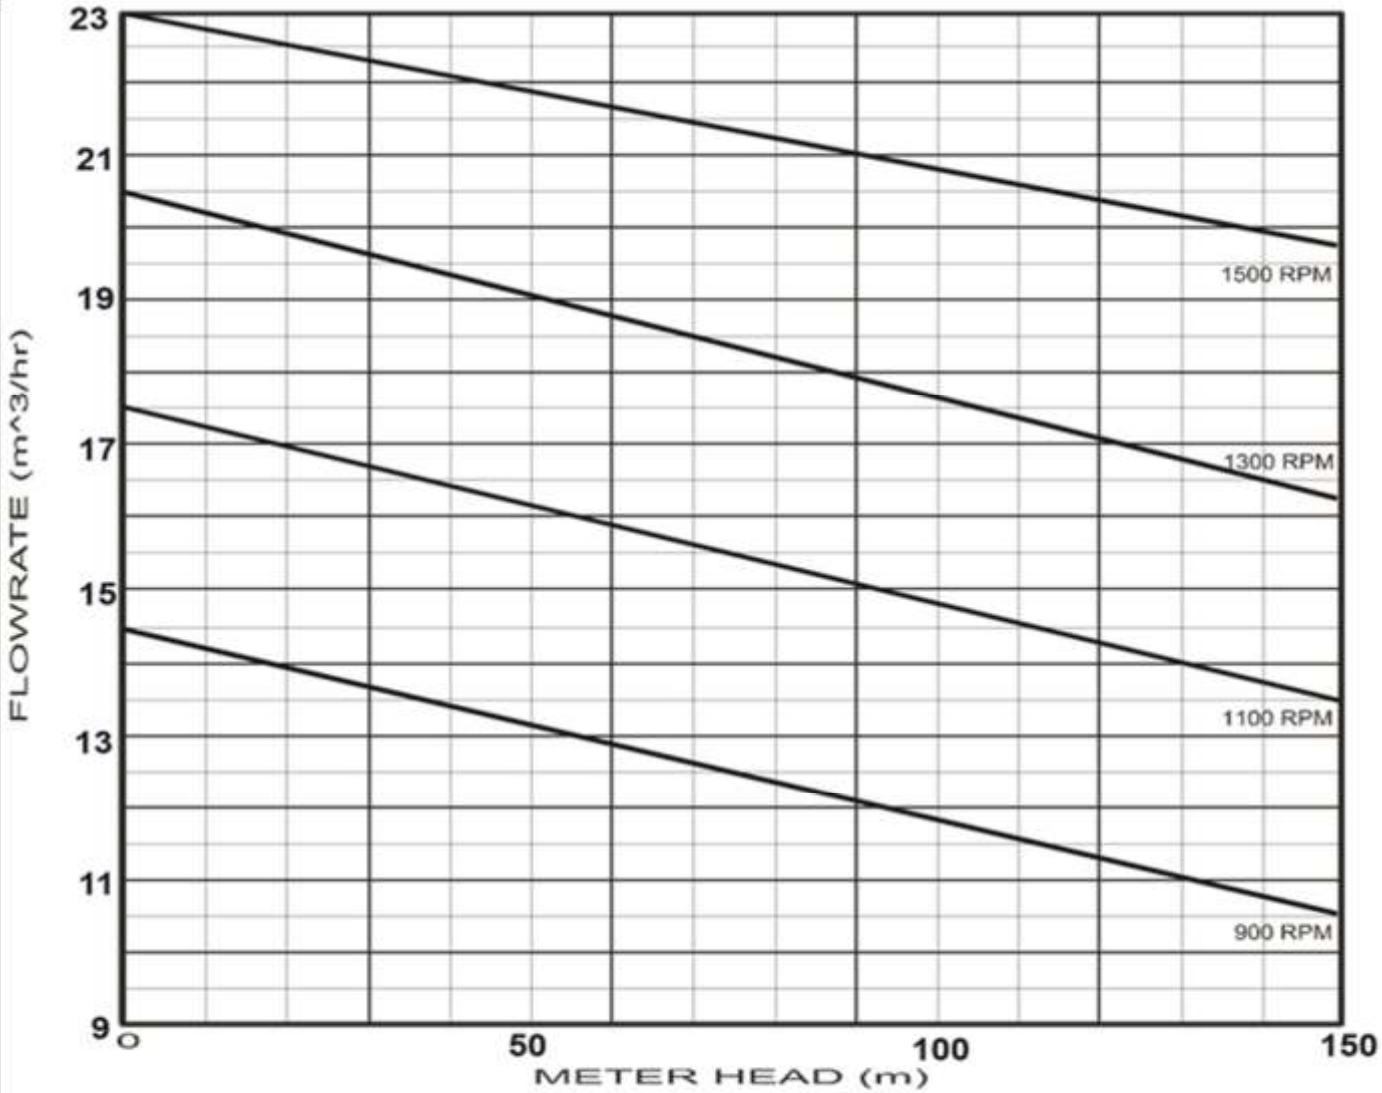

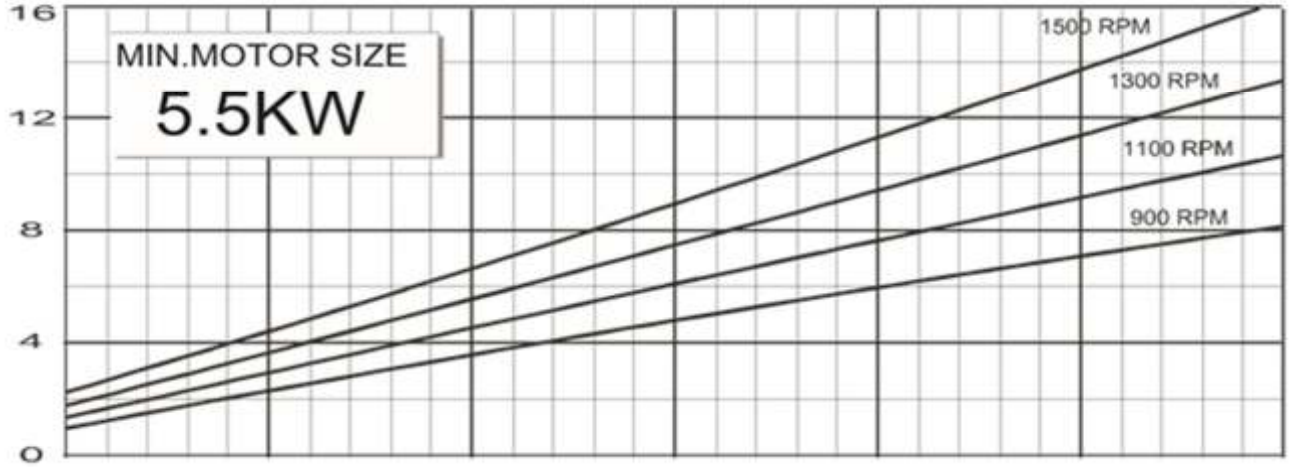



WASA	Typical Pump Performance Curve MAX. HEAD 225 METERS COLUMN 65 MM SHAFT 19 MM MIN. STARTING TORQUE 18 N.M TESTED ON WATER AT 20°C	**WA 22-3** NITRILE RUBBER

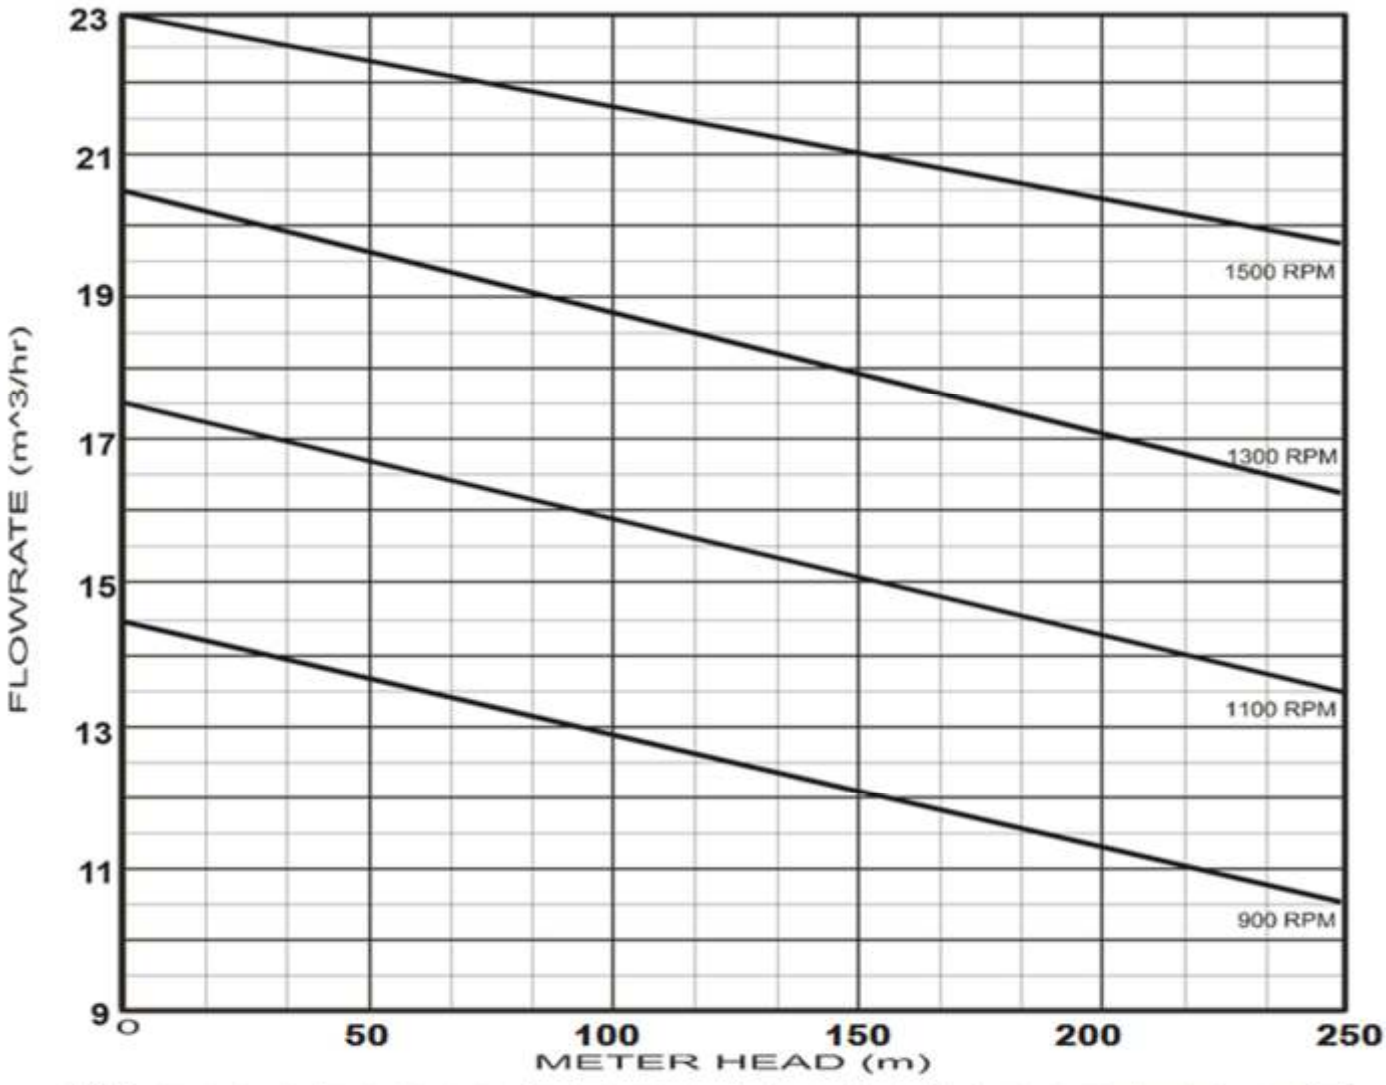

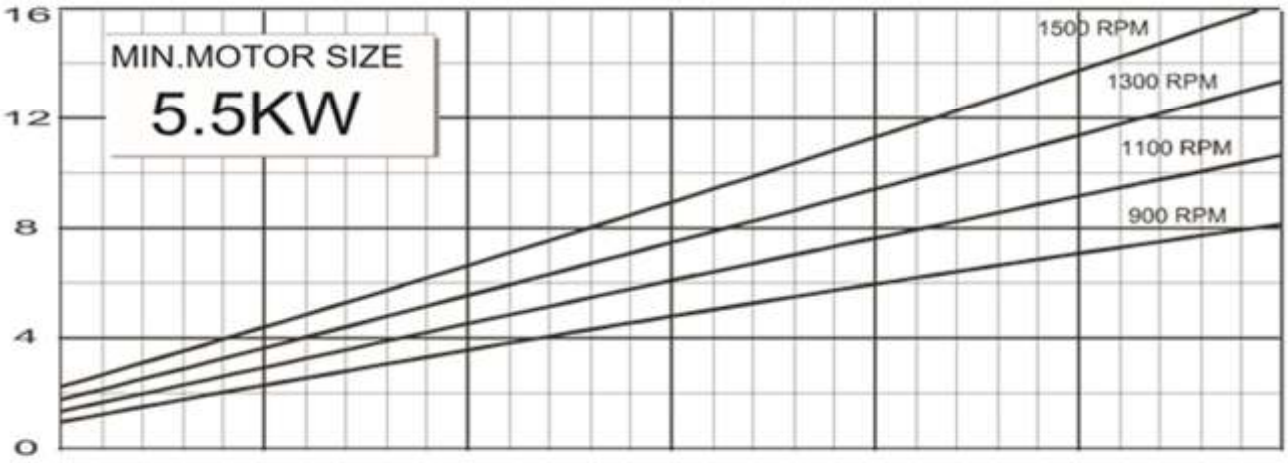



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 80 MM SHAFT 22 M MIN. STARTING TORQUE 23 N.M TESTED ON WATER AT 20°C	**WA 30-2** NITRILE RUBBER

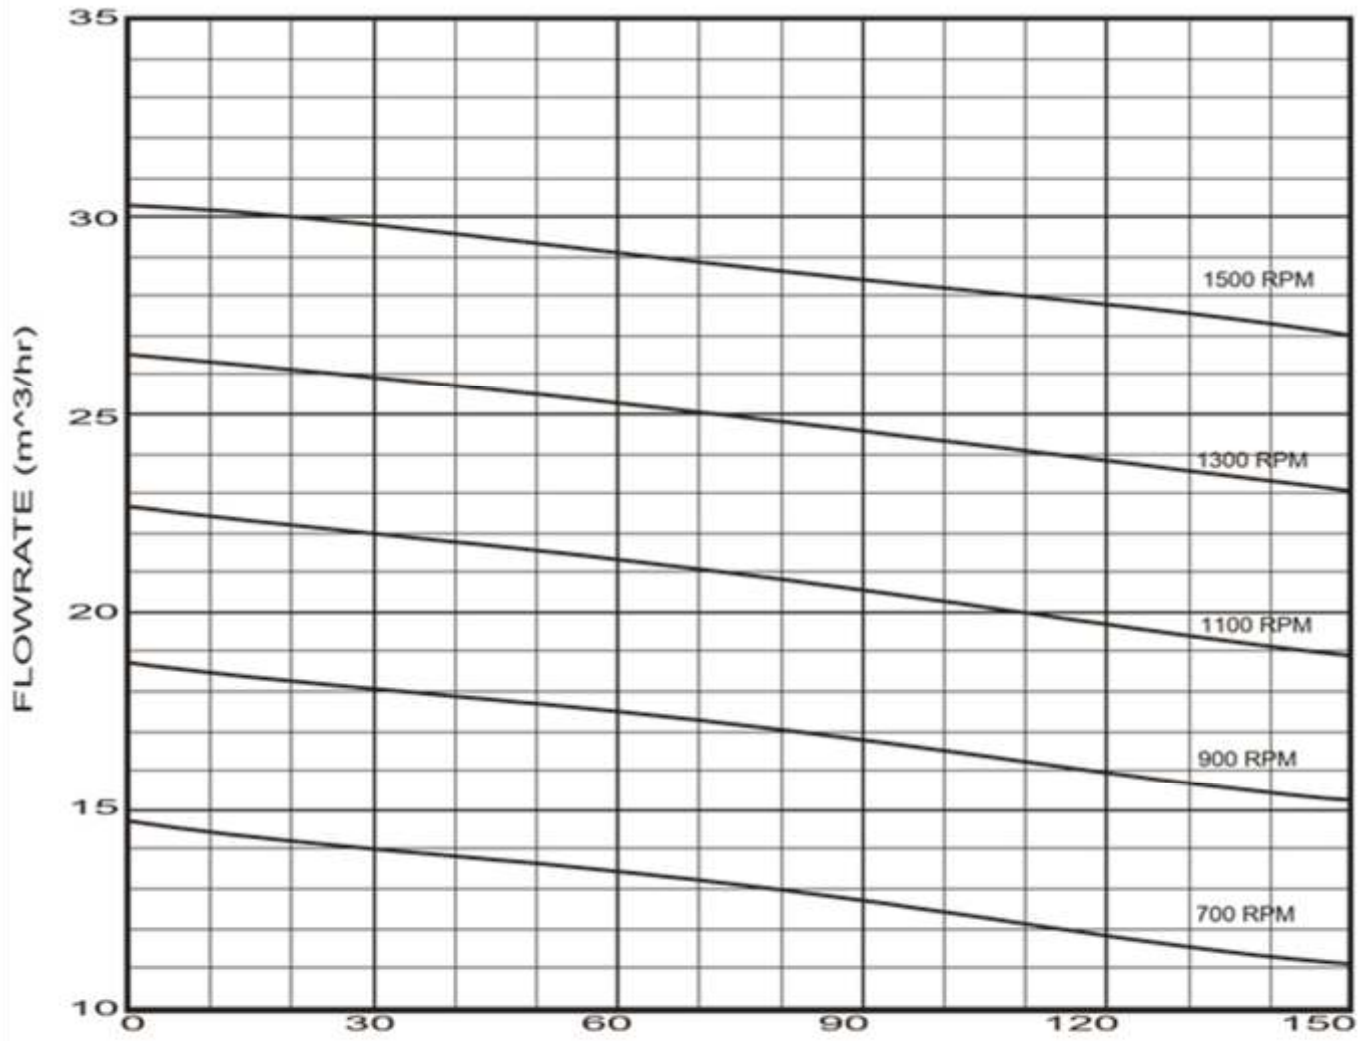

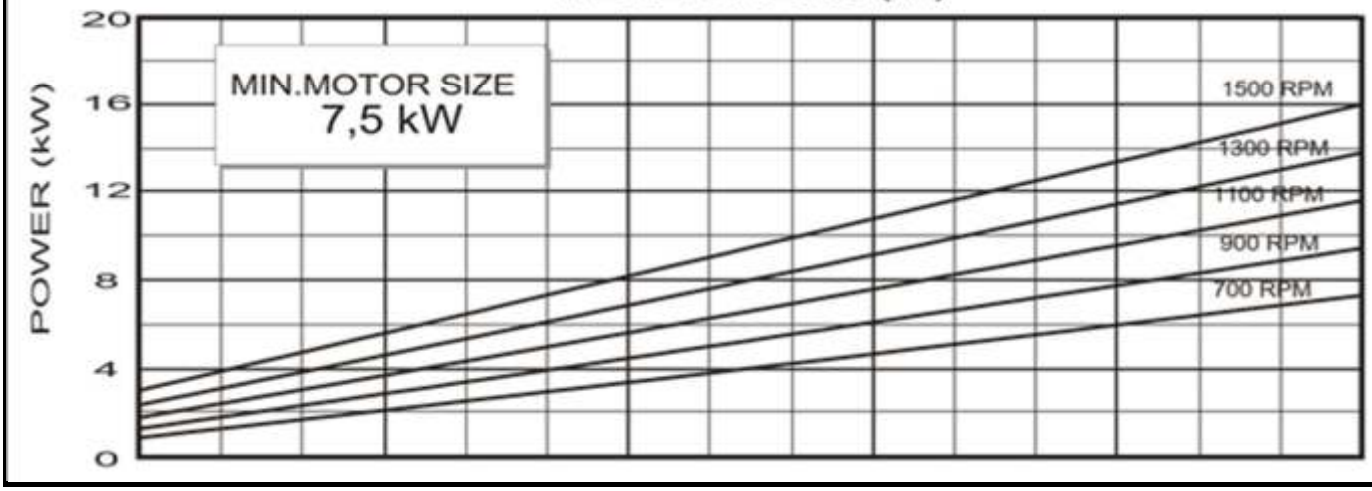



WASA	Typical Pump Performance Curve MAX. HEAD 300 METERS COLUMN 80 MM SHAFT 22 M MIN. STARTING TORQUE 23 N.M TESTED ON WATER AT 20°C	**WA 30-4** NITRILE RUBBER

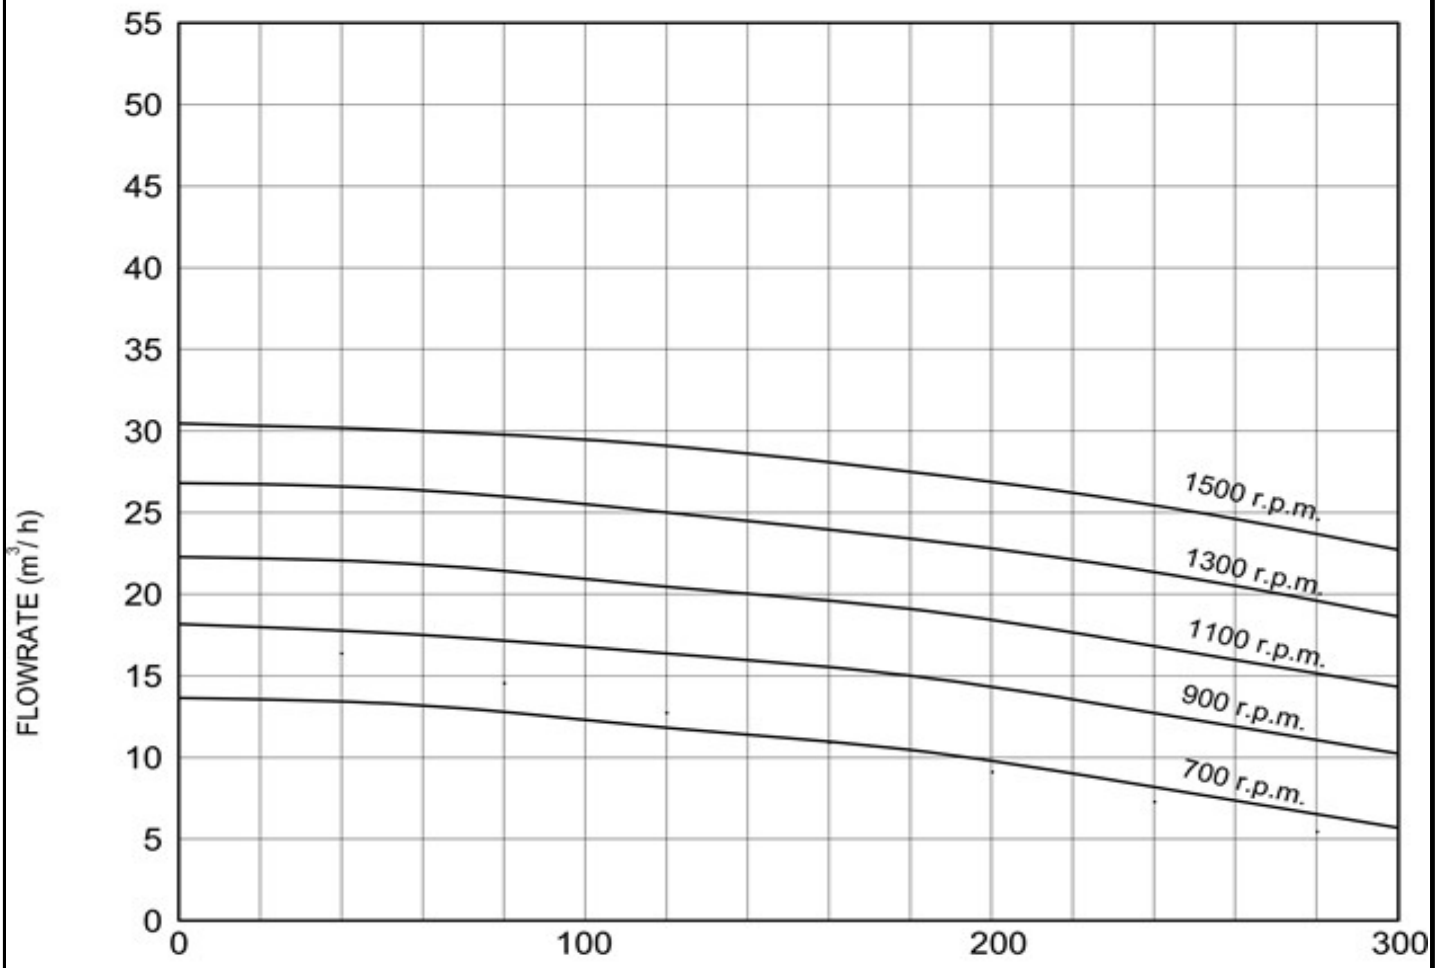

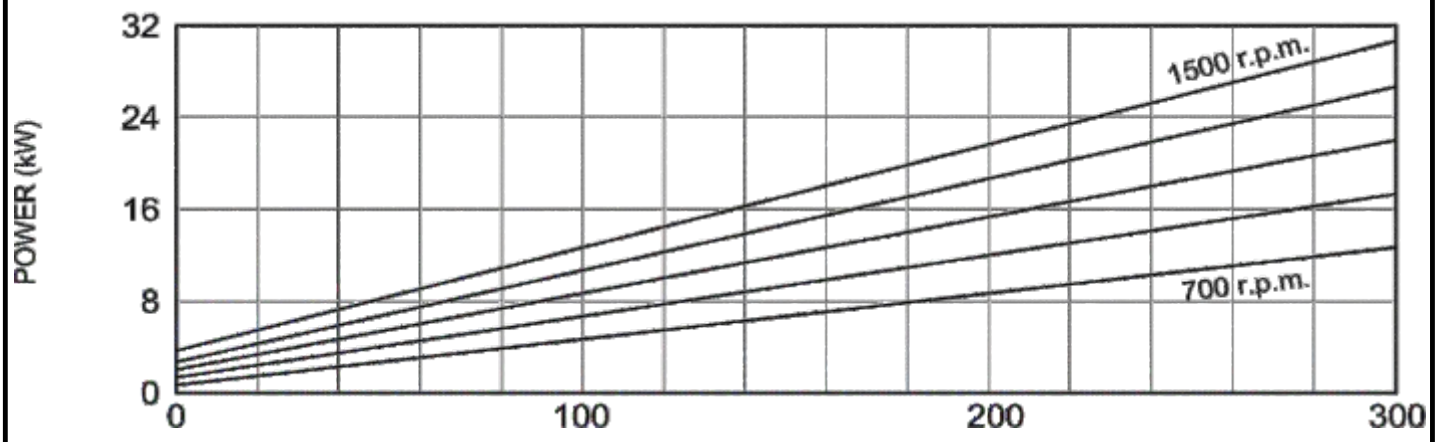



WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 100 MM SHAFT 22 M MIN. STARTING TORQUE 30 N.M TESTED ON WATER AT 20°C	**WA 50-2** NITRILE RUBBER

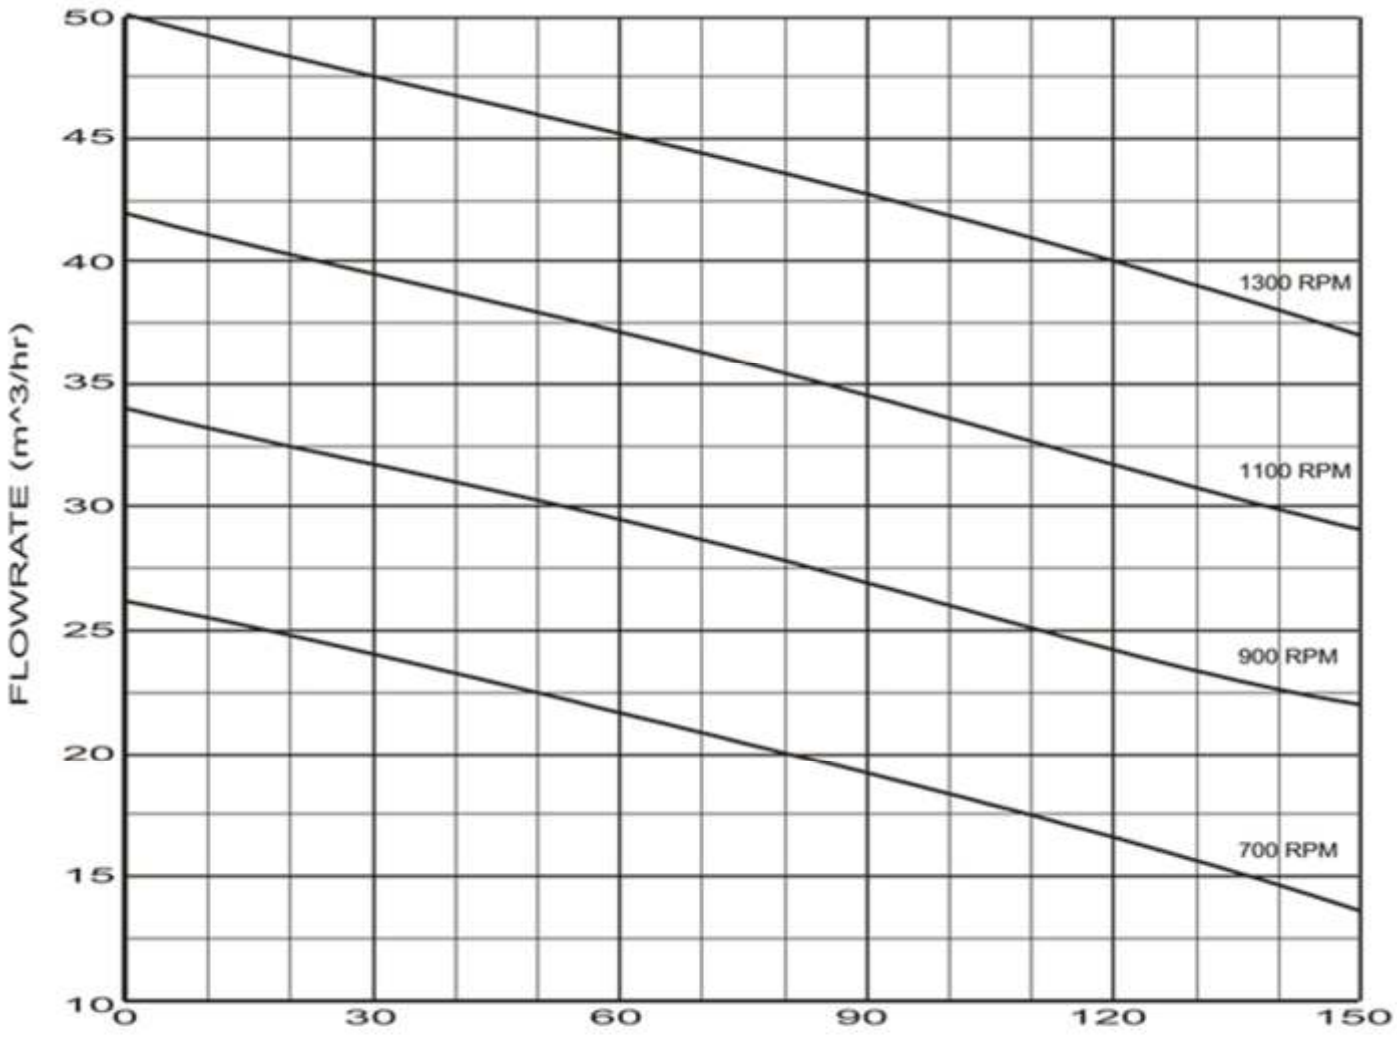

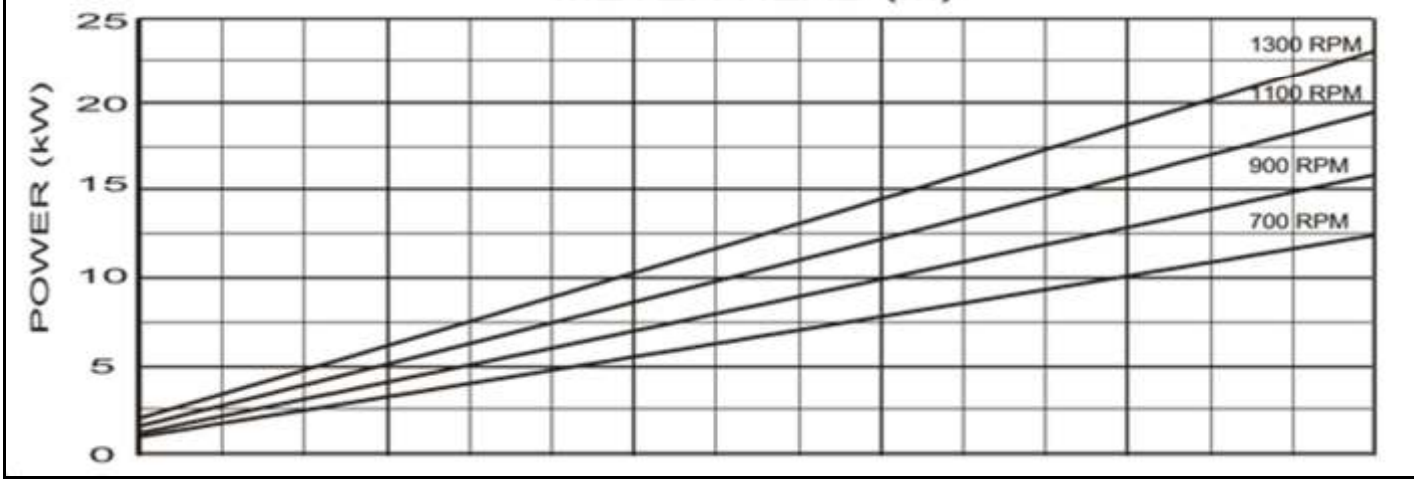

WASA	Typical Pump Performance Curve MAX. HEAD 300 METERS COLUMN 100 mm SHAFT 25 mm MIN. STARTING TORQUE 65 N.M TESTED ON WATER AT 20°C	WA 50-4 NITRILE RUBBER

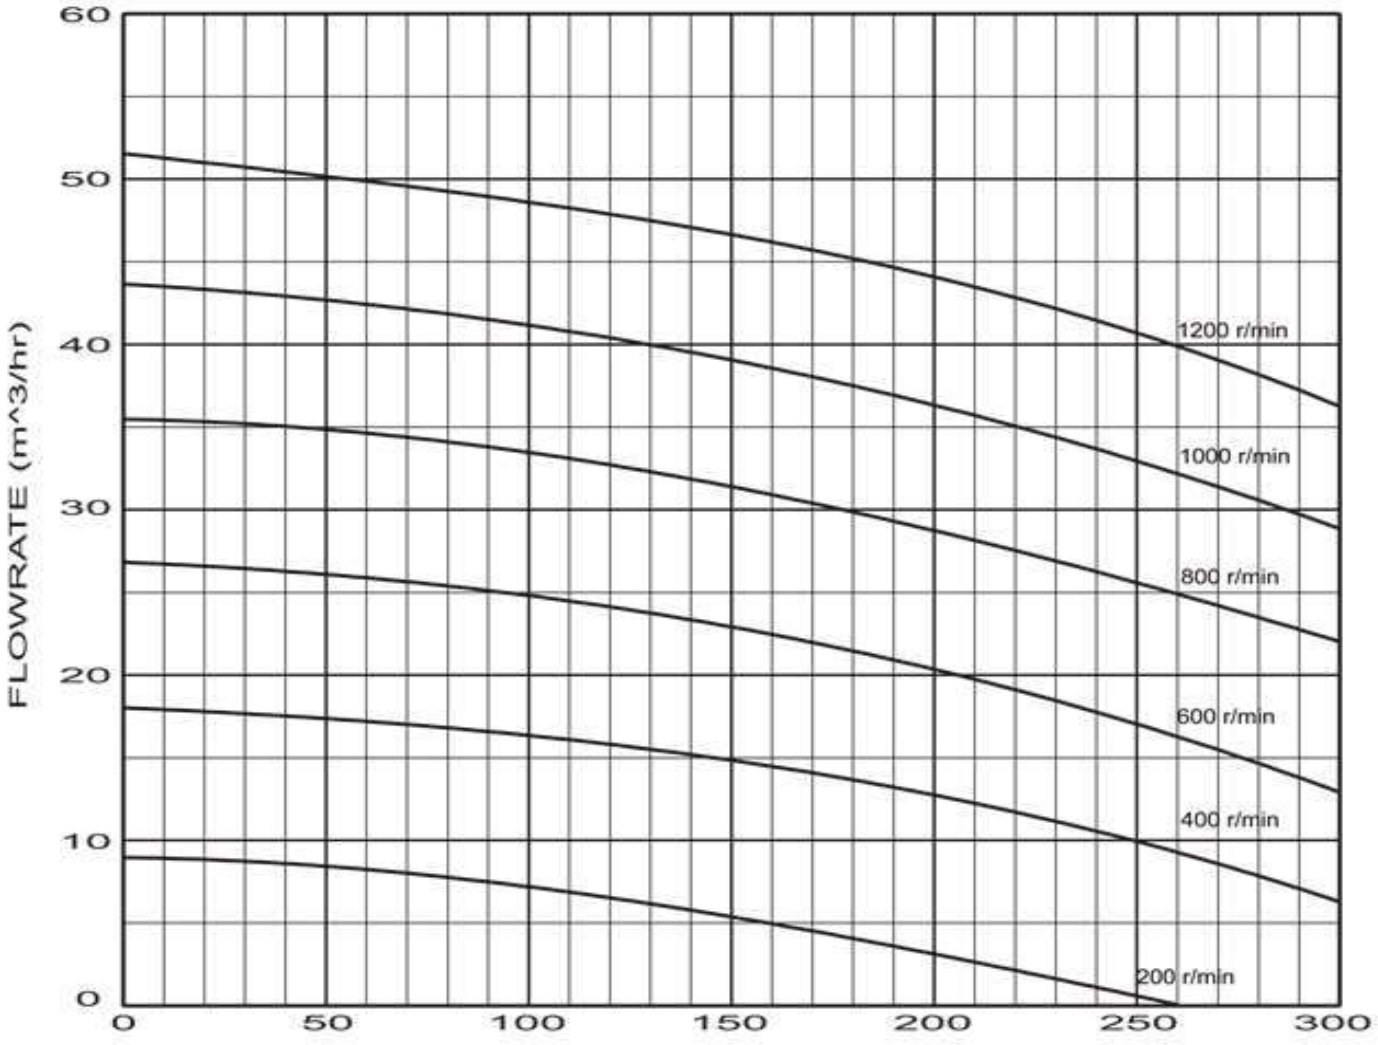


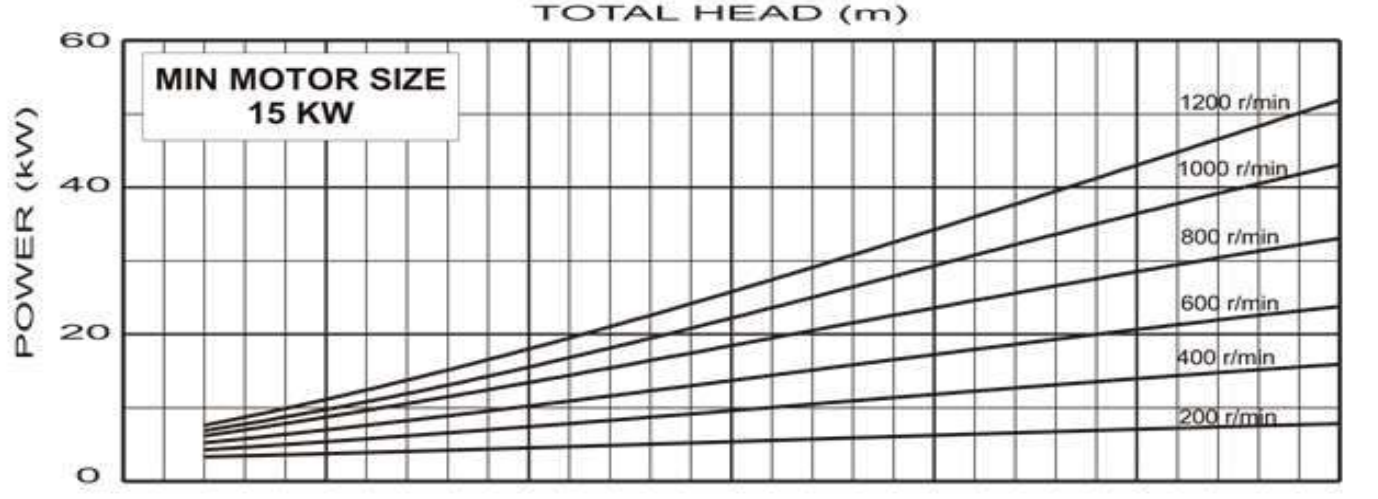


Typical Pump Performance Curve	
MAX. HEAD 150 METERS	
COLUMN 100 MM	
SHAFT 22 M	
MIN. STARTING TORQUE 40 N.M	
TESTED ON WATER AT 20°C	

WA 65-2


NITRILE RUBBER

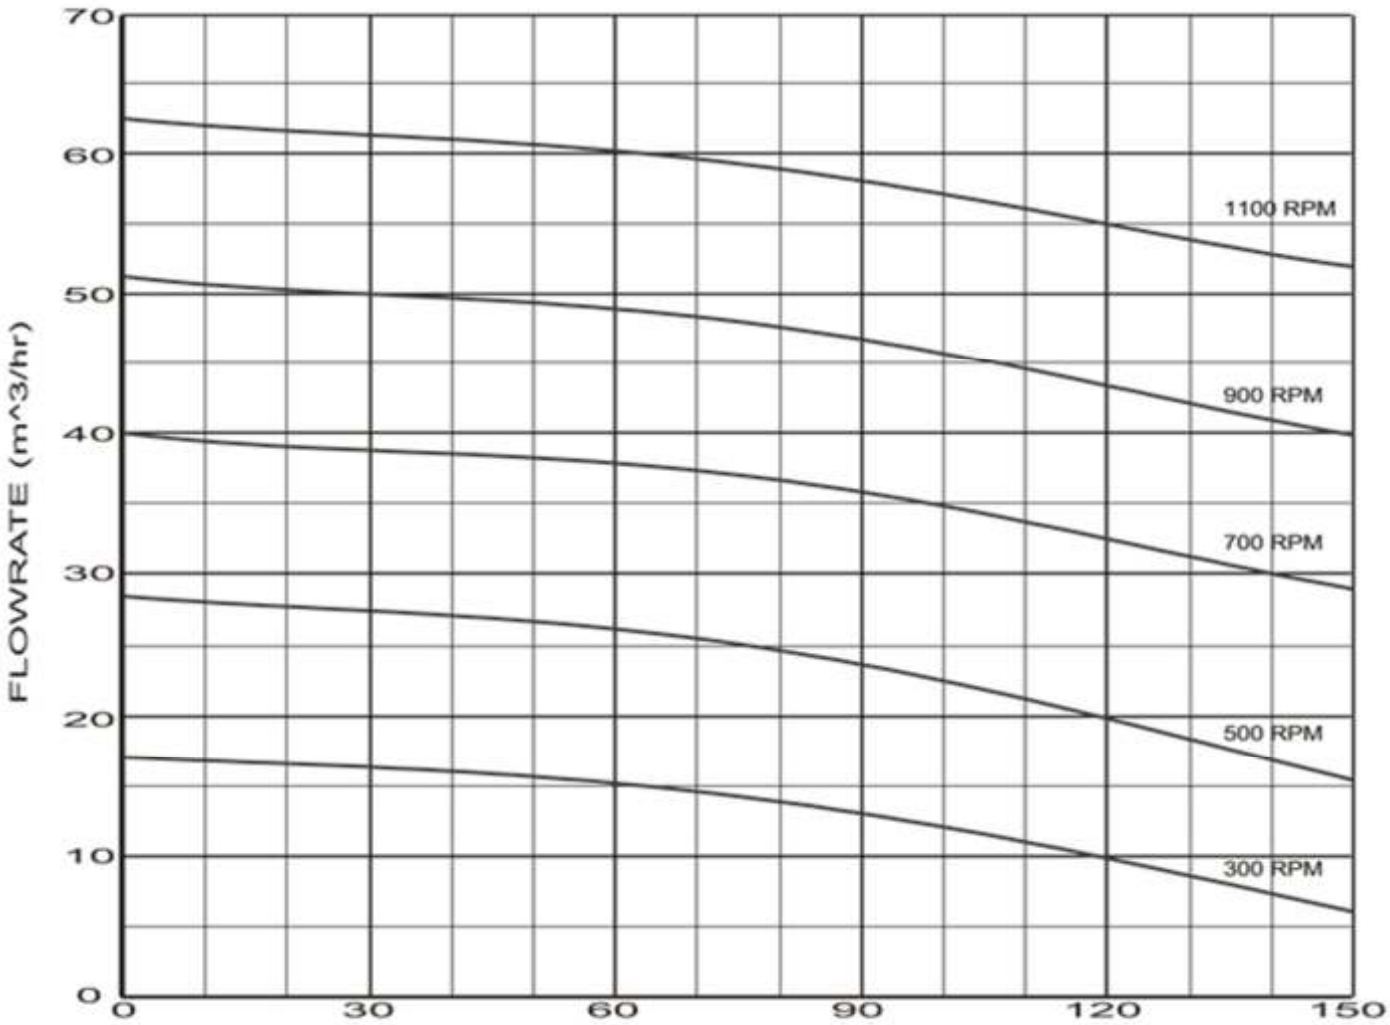


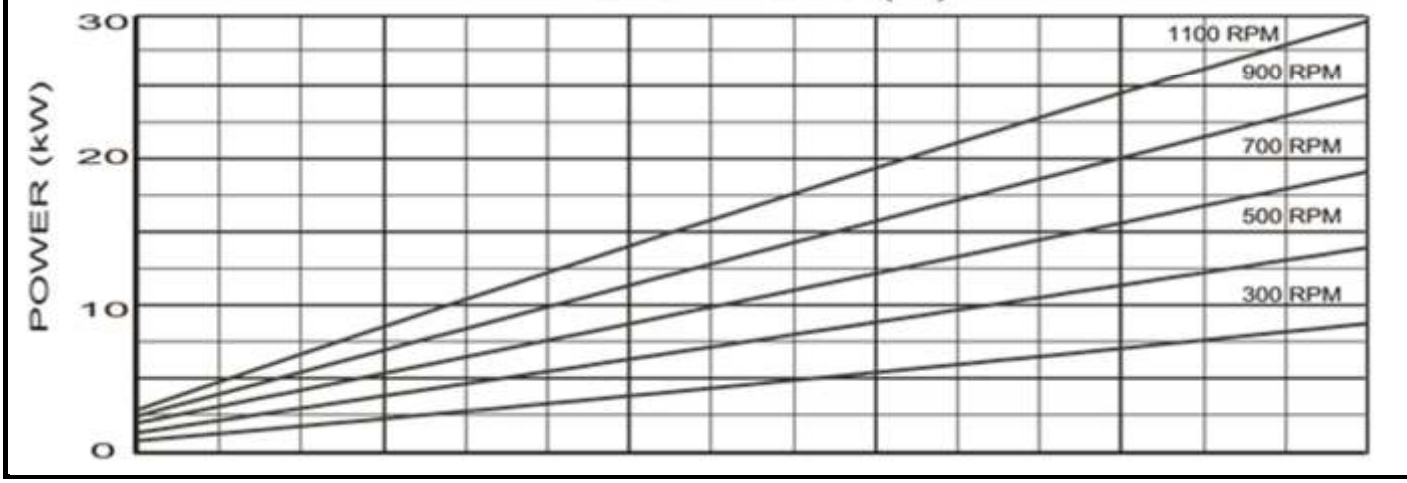

Typical Pump Performance Curve	
MAX. HEAD 150 METERS	
COLUMN 100MM	
HEAD 50M to 100M = 22MM SHAFT	
HEAD 100M to 150M - 25MM SHAFT	
MIN. STARTING TORQUE 23 N.M	
TESTED ON WATER AT 20°C	NITRILE RUBBER

WA 90-2

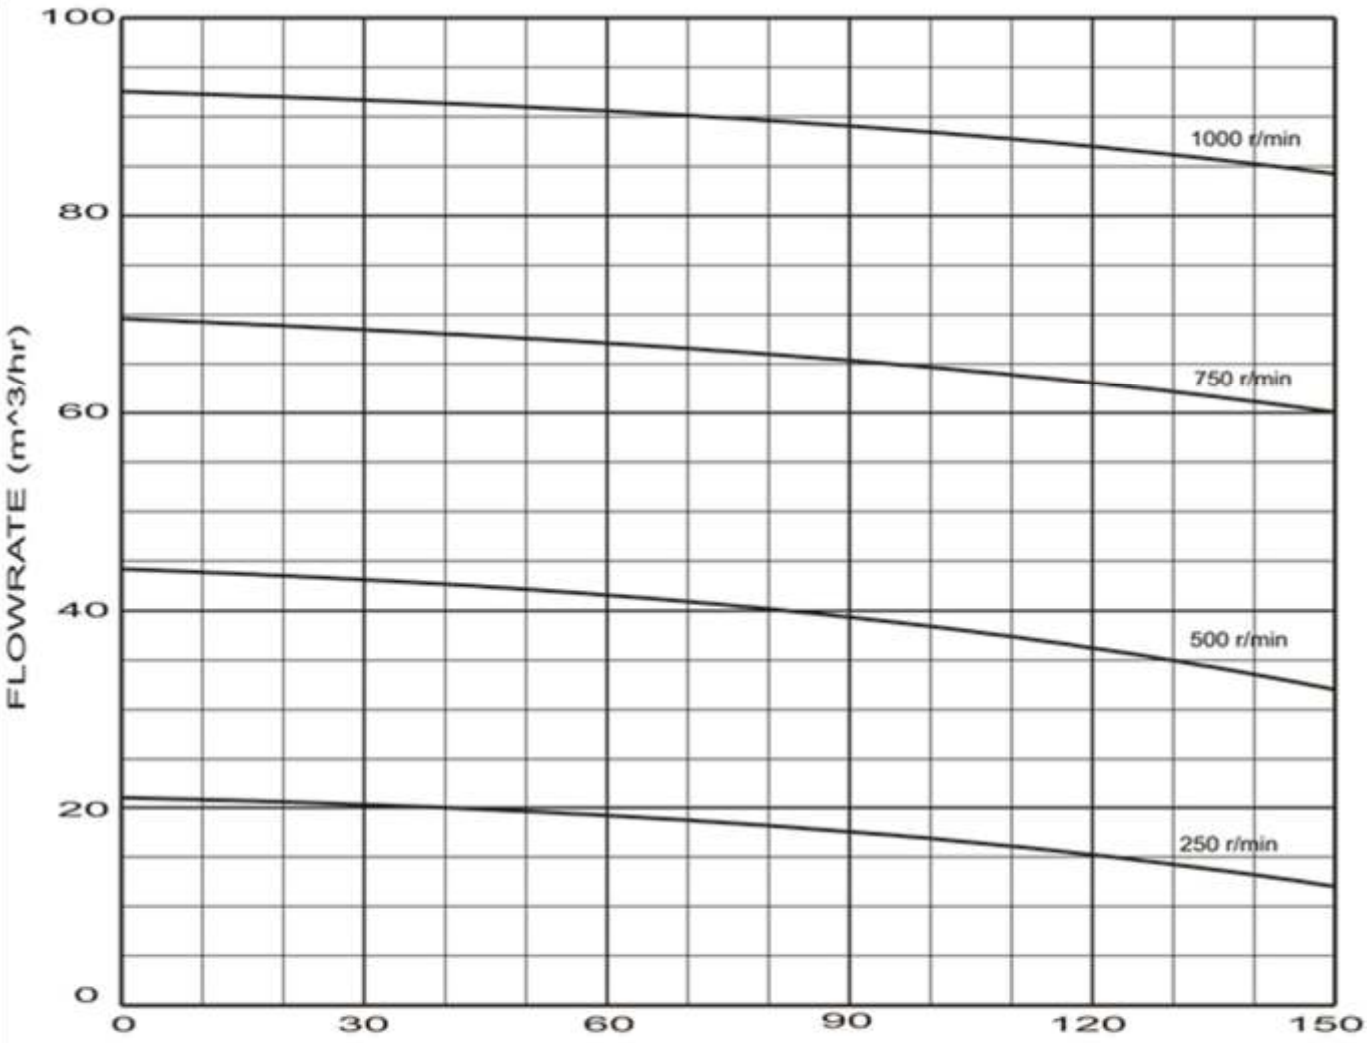

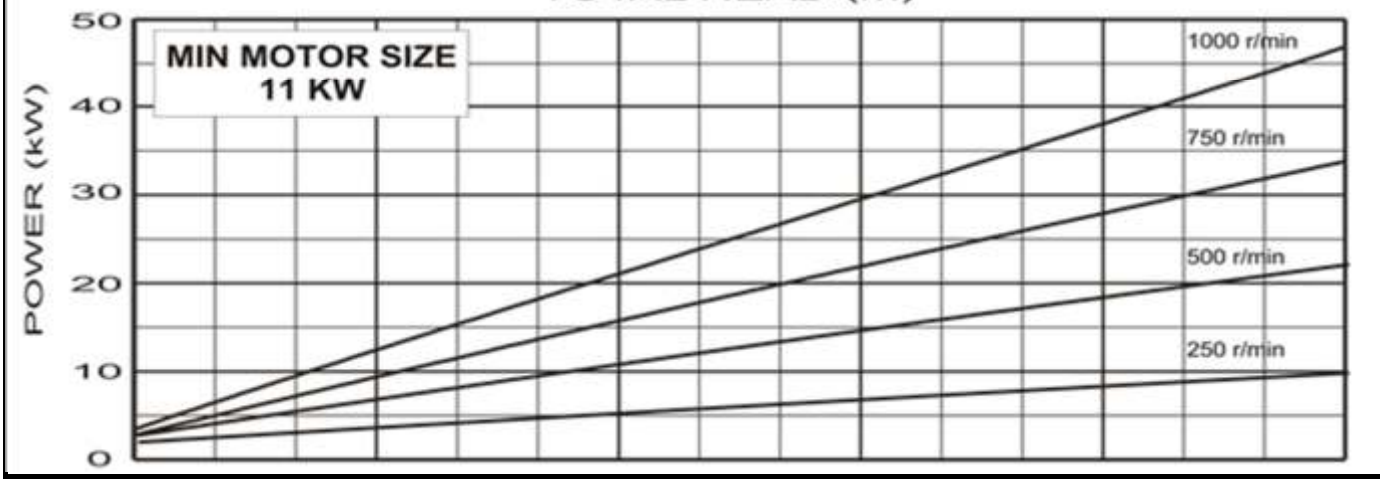

WASA	Typical Pump Performance Curve MAX. HEAD 150 METERS COLUMN 100MM HEAD 50M to 100M = 22MM SHAFT HEAD 100M to 150M - 25MM SHAFT MIN. STARTING TORQUE 23 N.M TESTED ON WATER AT 20°C	**WA 110-2** NITRILE RUBBER

