



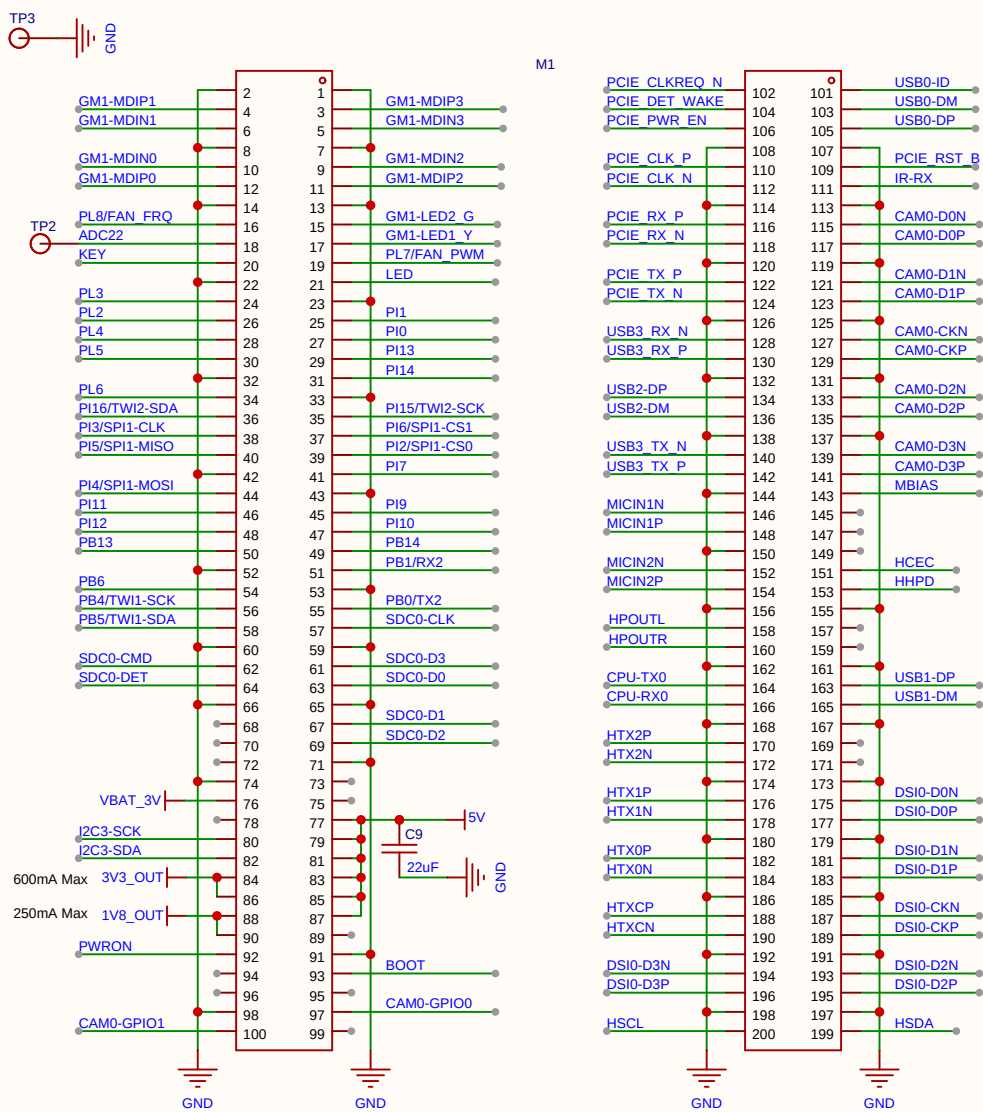


WalnutPi Compute Module 2 Connector

(3V3_OUT在系统正常启动才会输出，因此底板需要单独给SDCARD供电以便系统正常启动。)

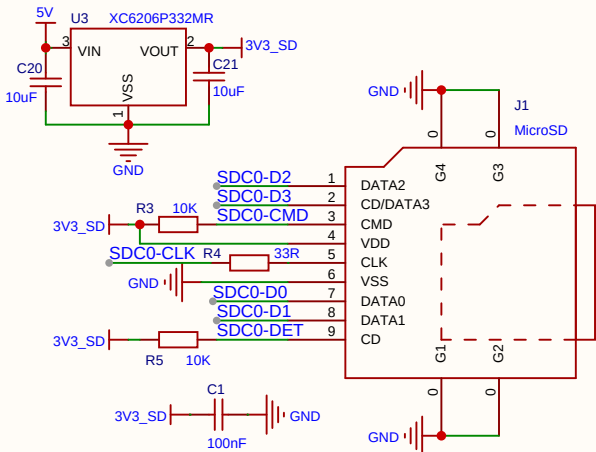


MicroSD


(保证SD卡有独立3.3V供电)

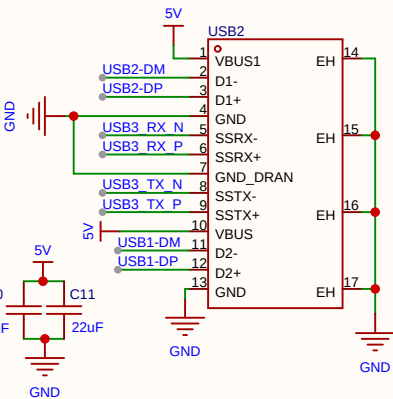


USB3.0 + USB 2.0

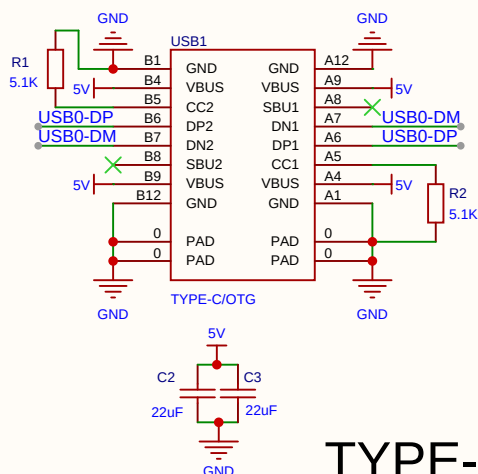


TYPE-C

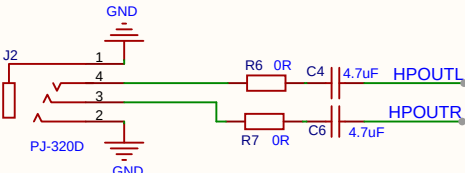


AUDIO

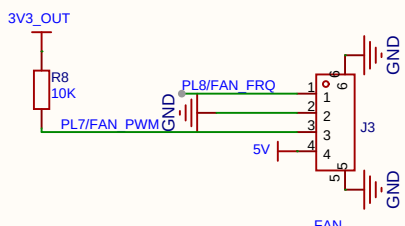


FAN

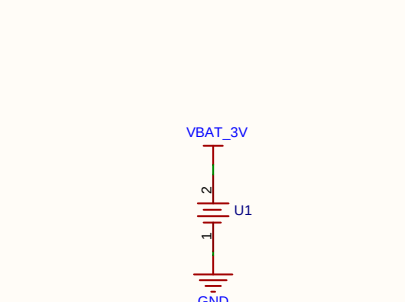


Backup BAT

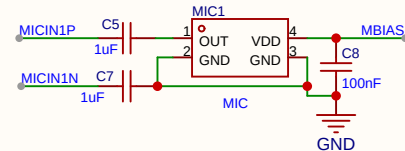


MIC




Debug

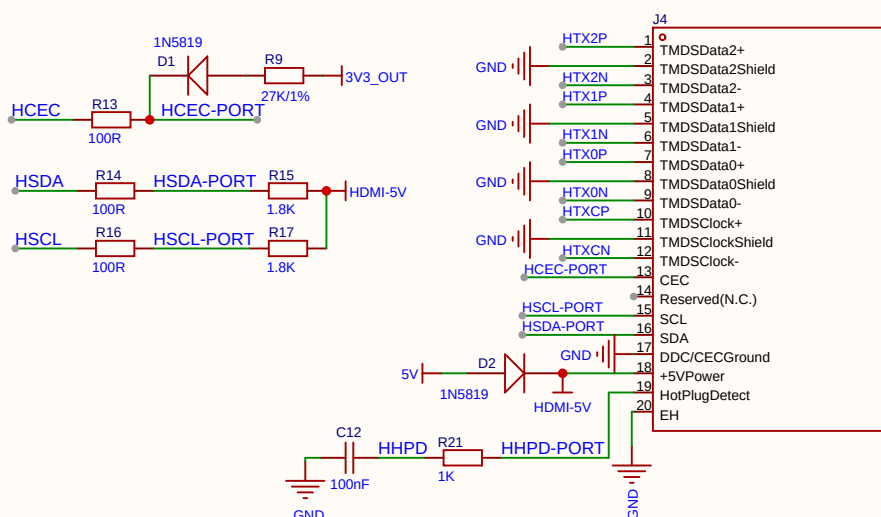


HDMI

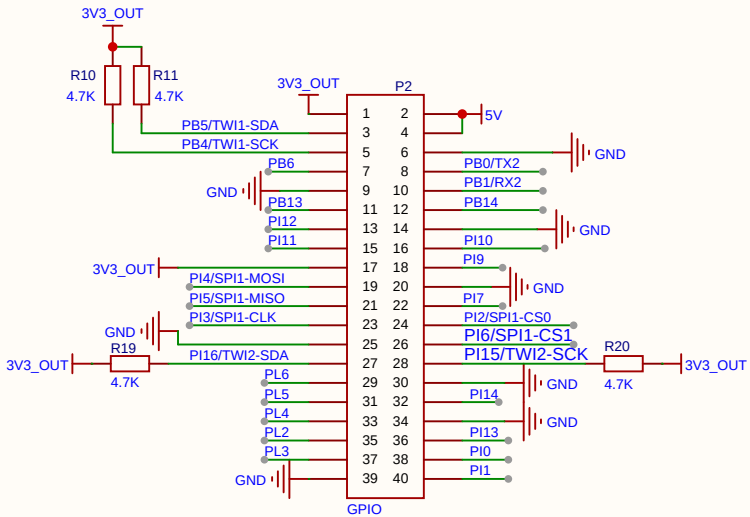


40Pin GPIO




Power ON



BOOT



LED



POWER

Title		核桃派(WalnutPi) CM2 IO BOARD	
Size	Number	Revision	
A3	www.walnutpi.com	v1.0	
Date:		Sheet	Of
File:		Drawn By:	

CAMERA0 (4Lane)

DISPLAY0 (4Lane)

Ethernet (100/1000M)

PCIe - M2

Title			核桃派(WalnutPi) CM2 IO BOARD		
Size	Number		Revision		
A3	www.walnutpi.com		v1.0		
Date:			Sheet	Of	
File:			Drawn By:		