

STORE.ARDUINO.CC/NANO

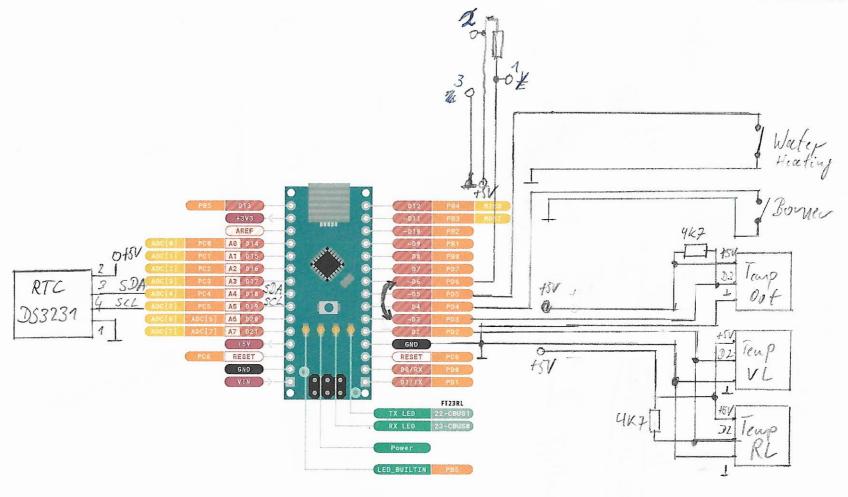



MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12 V input to the board.

ARDUXNO, CC

Last update: 21/12/2020



This work is licensed under the Creative Commons
Attribution-ShareAlike 4.0 International License. To view
a copy of this Kense, wish this //creativecommons.
org/(licenses/by-sal/C) or send a letter to Creative
Commons, FO Box 1866, Mountain View, CA 94042, USA.