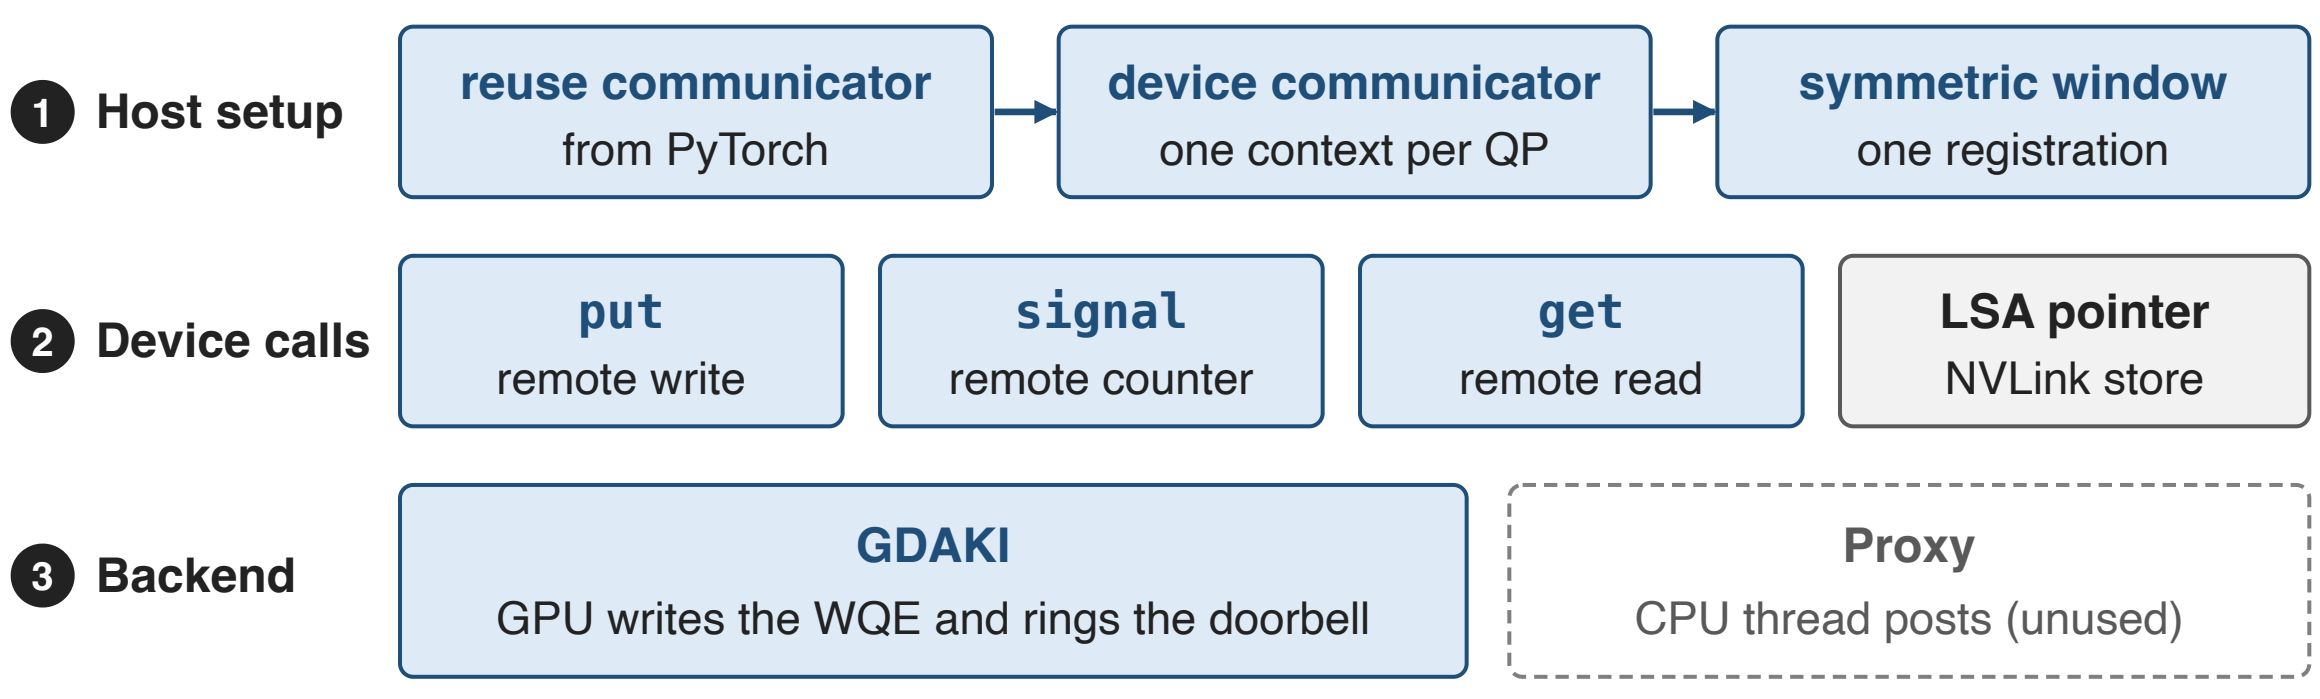
1 Host setup
reuse communicator
from PyTorch
device communicator
one context per QP
symmetric window
one registration
2 Device calls
put
remote write
signal
remote counter
get
remote read
LSA pointer
NVLink store
3 Backend
GDAKI
GPU writes the WQE and rings the doorbell
Proxy
CPU thread posts (unused)