CONTENTS ENM251 Notes

# ENM251 - Analytical Methods in Engineering Taught by Michael Carchidi Spring 2020 at UPenn Notes by Aaron Wang

These are the notes that I typed during the lectures/recitations. There's probably a lot of typo/mistakes since I haven't really gone through them after class, so keep an eye out for anything that doesn't make sense.

## Contents

1	Jan	anuary 22nd, 2020								
	1.1	•		3						
		1.1.1	1	3						
	1.2	Homos		4						
				5						
2	January 24th, 2020 6									
	2.1			6						
		2.1.1		6						
		2.1.2		6						
		2.1.3		7						
		2.1.4		7						
		2.1.5	Problem 3 Hints from Homework 1	8						
3	Jan	uary 2	$7\mathrm{th},2020$	9						
	3.1	•	·	9						
		3.1.1	,	.0						
		3.1.2		1						
		3.1.3		2						
4	Jan	uary 2	9th, 2020 1	3						
	4.1			.3						
	4.2			.3						
	4.3			4						
5	Jan	uary 3	1st, 2020	4						
	5.1	-	em $\overset{'}{1}$	4						
		5.1.1		.5						
	5.2	Proble	em 3	.5						

CONTENTS ENM251 Notes

6	February 3rd, 2020									
	6.1	Exact Equations								
	6.2	Inexact Equations								
7	February 5th, 2020									
	7.1	Applications								
		7.1.1 2nd-Order ODE								
8	February 10th, 2020									
	8.1	Review from MATH 240								
	8.2	Constant Coefficients								
	8.3	Cauchy-Euler/Equidimentional Equation								
	8.4	Other Stuff from Math 240								
	8.5	Non-Homogeneous Equations								
9	February 12th, 2020 24									
	9.1	Example Mass/Spring/Damper System								
	9.2	No Dampening $(\gamma = 0)$								
	9.3	Under Damping $(0 < \gamma < 1)$								
	9.4	Critical Damping $(\gamma = 1) \dots 27$								
	9.5	Over Damping $(\gamma > 1)$								
	9.6	Laplace Transforms								
10	Febi	ruary 14th, 2020 29								
	10.1	Problem 1 - Solution 1								
		Problem 1 - Solution 2								
	10.3	Problem 2								
In	$\operatorname{dex}$	33								

## 1 January 22nd, 2020

There are 5 types:

- Separable Differential Equation
- Homogeneous Differential Equation
- Linear Differential Equations
- Bernoulli Differential Equation
- ???

## 1.1 Separable Differential Equation

A general first-order ODE for a dependent variable y in the independent variable x can be written as:

$$\frac{dy}{dx} = F(x, y) \tag{1}$$

where F is some specified function of x and y. When F has the form

$$F(x,y) = f(x)g(y), (2)$$

then 1 is said to be *separable* and such equation can always be solved by:

$$\frac{dy}{g(y)}f(x)dx \implies \int \frac{dy}{g(y)} + C_1 = \int f(x)dx + C_2 \implies \int \frac{dx}{g(y)} = \int f(x)dx + C.$$

as one form for the solution of 1.

#### 1.1.1 Ideal Fluid Flow

We are concerned with a container that has a fluid with cross sectional area A with density  $\rho$  with a hole at the bottom of the container which causes it to flow out. We are concerned with the heigh x of the container. We also have a pipe that pumps in fluid with constant rate R.

This leads to following equation:

$$\frac{dx}{dt} = \alpha - \beta \sqrt{x}.$$

where

$$\alpha = \frac{R}{A}$$
  $\beta = \sqrt{\frac{2ga^2}{A^2 - a^2}}$   $g = 9.81 \text{m s}^{-2}$ .

Note that this is a separable differential equation:

$$\frac{dx}{\alpha - \beta \sqrt{x}} = dt.$$

If we have  $\alpha$ ,  $\beta$ , we can solve, e.g.  $\alpha = 60~\beta = 6$ , we have:

$$\frac{dx}{dt} = 60 - 6\sqrt{x} \implies \frac{dx}{10 - \sqrt{x}} = 6dt.$$

Integrating on both sides, we have:

$$\int \frac{dx}{10 - \sqrt{x}} = \int 6dt = 6t + C.$$

Solving this, we get:

$$20\tan^{-1}\left(\frac{\sqrt{x}}{10}\right) - 10\ln(100 - x) - 2\sqrt{x} = 6t + C.$$

If we have initial conditions, e.g. at t = 0, x = 0, we would have:

$$0 - 10\ln(100) = C$$

allowing us to solve for C. This would allow us to solve for a time t for certain values of x.

## 1.2 Homogeneous Differential Equation

Again remember that the general form a differential equation of one a dependent variable y in the independent variable x is:

$$\frac{dy}{dx} = F(x, y).$$

If F(x,y) = f(x)g(x) then this is separable. Remember that the goal is that we want to find G(x,y) = C, in other words, we want to get rid of the derivative and find the relationship between the two.

**Definition 1.1.** A function of form F(x,y) is called **homogeneous** of order N if  $F(tx,ty) = t^N F(x,y)$  for any scalar t.

#### Example 1.2

$$F(x,y) = x^3 + x^2y + 4xy^2 \implies F(tx,ty) = (tx)^3 + (tx)^2(ty) + 4(tx)(ty)^2$$
$$= t^3 (x^3 + x^2y + 4xy^2) = t^3 F(x,y).$$

Thus F(x,y) is homogeneous to the order 3.

#### Example 1.3

 $F(x,y) = x^3 + xy$  is not homogeneous.

#### Example 1.4

$$F(x,y) = \frac{xy}{x^2 + y^2}$$

$$F(tx,ty) = \frac{t^2xy}{t^2x^2 + t^2y^2} = t^2\left(\frac{xy}{x^2 + y^2}\right) = t^0F(x,y)$$

meaning that F(x, y) is homogeneous to order 0.

**Remark 1.5** — Typically if we say that a function is homogeneous but don't specify the order, it is assumed to be of order 0.

If a function in homogeneous to order 0, then it only depends on the ratio of  $\frac{y}{x}$ . In other words, rewrite  $F(x,y) = f(\frac{y}{x})$ .

#### Theorem 1.6

A function F(x,y) is homogeneous of order 0 if and only if it can be expressed as  $f(\frac{y}{x})$ .

If we have a homogeneous function of order 0, we will be able to introduce a new variable  $z = \frac{y}{x} \implies y = sz$ , giving us:

$$\frac{d(xz)}{dx} = F(x, xz) = F(x(1), x(z)) = F(1, z).$$

Using the product rule, we have:

$$\frac{d(xz)}{dx} = \frac{dx}{dx}z + x\frac{dz}{dx} = F(1, z).$$

$$z + x\frac{dz}{dx} = F(1, z) \implies \frac{dz}{F(1, z) - z} = \frac{dx}{x},$$

which is a separable differential equation.

**Remark 1.7** — The point is whenever you have a homogeneous equation, then introducing  $z = \frac{y}{x}$  will allow us to convert it to a separable equation. Note that this only works for order 0 homogeneous equations.

#### 1.2.1 Building an Radar Antenna

TL;DR the equation is:

$$\left(\frac{dy}{dx}\right)^2 - 2\frac{y - F}{x}\left(\frac{dy}{dx}\right) - 1 = 0.$$

If we use the quadratic formula, we get:

$$\frac{dy}{dx} = \frac{y-F}{x} + \sqrt{\left(\frac{y-F}{x}\right)^2 + 1}.$$

If we do the substitution,  $z = \frac{y-F}{x}$ , we get:

$$\frac{d(xz+F)}{dx} = z + \sqrt{z^2 + 1} \implies x\frac{dz}{dx} + z = z + \sqrt{z^2 + 1} \implies \frac{dz}{\sqrt{z^2 + 1}} = \frac{dx}{x}.$$

$$\int \frac{dz}{\sqrt{z^2 + 1}} = \ln x + C \implies \ln\left(z + \sqrt{z^2 + 1}\right) = \ln x + C.$$

$$\implies A^2x^2 - 2Axz = 1 \implies \frac{1}{2}Ax^2 + \left(F - \frac{1}{2A}\right),$$

which is the equation of a parabola. Thus the optimal shape of a radar dish is a parabola.

## 2 January 24th, 2020

#### 2.1 Recitation 1

#### 2.1.1 Homogeneous ODE

Recall that a homogeneous equation is

$$\frac{dy}{dx} = F(x, y), \text{ with } F(ax, ay) = a^n F(x, y).$$

What this typically means is that we won't have a constant.

#### Example 2.1

F(x,y) = xy is homogeneous, as  $F(ax,ay) = a^2xy$ , while F(x,y) = ax + 5 is not homogeneous, as  $F(ax,ay) = a^2xy + 5 \neq a^nF(x,y)$ .

For 1st order homogeneous ODE, we have n = 0, with this we can introduce  $z = \frac{y}{x}$  and convert this ODE into a separable differential equation.

#### 2.1.2 Problem 1

#### Example 2.2

Let's consider

$$F(x,y) = \frac{dy}{dx} = \frac{2y^2 - x^2}{3xy}.$$

$$F(ax, ay) = \frac{2a^2y^2 - a^2x^2}{3a^2xy} = F(x, y),$$

meaning that it is a first order homogeneous equation.

With this, we have:

$$\frac{d(zx)}{dx} = \frac{2(zx)^2 - x^2}{3x(zx)}$$

$$\implies z + x\frac{dz}{dx} = \frac{2x^2z^2 - x^2}{3x^2z} = \frac{2z^2 - 1}{3z}$$

$$\implies x\frac{dz}{dx} = \frac{2z^2 - 1 - 3z^2}{3z} = -\frac{z^2 + 1}{3z}.$$

Now we can separate, giving us:

$$\frac{z}{z^2+1}dz = -\frac{1}{3x}dx \implies \int \frac{z}{z^2+1}dz = \int -\frac{1}{3x}dx$$
$$\implies \frac{1}{2}\ln(z^2+1) = -\frac{1}{3}\ln(x) + C_1$$

Solving for  $C_1$ , we get:

$$3\ln(z^2+1) = -2\ln(x) + 6C \implies C = 3\ln(z^2+1) + 2\ln(x) = 6C_1$$
$$\implies \ln(x^2(z^2+1)^3) = 6C_1 \implies x^2(z^2+1)^3 = e^{6C_1}.$$

2.1 Recitation 1 ENM251 Notes

Remembering that  $z = \frac{y}{x}$ , we have:

$$x^{2} \left(\frac{y^{2}}{x^{2}} + 1\right)^{3} = e^{6C_{1}} \implies \frac{(y^{2} + x^{2})^{3}}{x^{4}} = e^{6C_{1}} \implies \frac{y^{2} + x^{2}}{x^{\frac{4}{3}}} = e^{2C_{1}} = C.$$
$$y = \pm x^{\frac{2}{3}} \sqrt{C - x^{\frac{3}{2}}}.$$

#### 2.1.3 Bernoulli Equation

**Definition 2.3.** A **Bernoulli Equation** is an equation of the form:

$$\frac{dy}{dx} + P(x)y = Q(x)y^n.$$

If n=0 or n=1, we separate this equation. If  $n\neq 0,1,$  defining  $y=z^{\lambda},$  we have:

$$\frac{dy}{dx} = \frac{d(z^{\lambda})}{dx} = \frac{dz}{d\lambda}\frac{dz}{dx} = \lambda z^{\lambda - 1}\frac{dz}{dx}$$

Substituting this back, we have:

$$\lambda z^{\lambda - 1} \frac{dz}{dx} + P(x)z^{\lambda} = Q(x)(z^{\lambda})^{n}.$$

Dividing both sides by  $\lambda z^{\lambda-1}$ , we have:

$$\frac{dz}{dx} + \frac{1}{\lambda}P(x)z = \frac{1}{\lambda}Q(x)z^{\lambda n - \lambda + 1}.$$

Setting  $\lambda$  such that  $\lambda n - \lambda + 1 = 0$ , i.e.  $\lambda = \frac{1}{1-n}$ , the equation becomes:

$$\frac{dz}{dx} + (1-n)P(x)z = (1-n)Q(x).$$

Which is a linear equation, which we can solve:

$$z(x) = \frac{1}{\mu_n} \left( \int \mu_n (1 - n) Q(x) dx + C \right), \quad \mu_n = \exp\{(1 - n) P(x) dx\}.$$

And substituting back into the original equation, we have:

$$y = z^{\lambda} = z^{\frac{1}{1-n}} = \left(\frac{1}{\mu_n} \left( \int \mu_n (1-n)Q(x)dx + C \right) \right)^{\frac{1}{1-n}}.$$

#### 2.1.4 Problem 2

Consider

$$vx\frac{dv}{dx} + v^2 + xg = \frac{FL}{m}.$$

Rearranging the equation, we get:

$$\frac{dv}{dx} + \frac{v}{x} + \frac{g}{v} = \frac{FL}{xvm} \implies \frac{dv}{dx} + \left(\frac{1}{x}\right)v = \left(\frac{FL}{mx} - g\right)v^{-1}.$$

Recitation 1 ENM251 Notes

which is the form of a Bernoulli equation. As such, we can just plug into the formula, and we get:

$$\mu = \exp\{\int (1 - (-1))\frac{1}{x}dx\} = e^{\int \frac{2}{x}dx} = x^{2\ln(x)} = x^2.$$

$$V(x) = \left(\frac{1}{\mu}\left(\int (1 - (-1))\mu Q(x)dx + C\right)\right) \frac{1}{(1 - (-1))}$$

$$= \left(\frac{1}{x^2}\left(\int 2x^2\left(\frac{FL}{mx} - g\right)dx + C\right)\right)^{\frac{1}{2}}$$

$$= \left(\frac{1}{x^2}\left(\frac{FLx^2}{m} - \frac{2}{3}gx^3\right) + C\right)^{\frac{1}{2}} = \left(\frac{FL}{m} - \frac{2}{3}gx + \frac{C}{x^2}\right)^{\frac{1}{2}}.$$

If we have an constraint where V is finite with x=0, we need C=0, as otherwise x=0will be infinite. Thus:

$$V = \sqrt{\frac{FL}{m} - \frac{2}{3}gx}.$$

#### Problem 3 Hints from Homework 1 2.1.5

In the first homework, we have:

$$\frac{dx}{dt} = K (\alpha - mx)^2 (\beta - nx),$$

for some positive constants  $\alpha, \beta, m, n$ . Here we want to determine:

$$\lim_{t \to \infty} x(t).$$

when  $\frac{\alpha}{m} < \frac{\beta}{n}$ ,  $\frac{\alpha}{m} = \frac{\beta}{n}$ ,  $\frac{\alpha}{m} > \frac{\beta}{n}$ . If we plug into the equation, we have:

$$\frac{dx}{dt} = Km^2n\left(\frac{\alpha}{m} - x\right)^2\left(\frac{\beta}{n} - x\right).$$

Note that these are all positive except for the last factor. Thus, for the first case, we have:

- 1. For  $x < \frac{\alpha}{m}, \frac{dx}{dt} > 0$
- 2. For  $x = \frac{\alpha}{m}$ ,  $\frac{dx}{dt} = 0$
- 3. For  $x > \frac{\alpha}{m}$  and  $x < \frac{\beta}{m}$ ,  $\frac{dx}{dt} > 0$
- 4. For  $x = \frac{\beta}{n}$ ,  $\frac{dx}{dt} = 0$
- 5. For  $x > \frac{\beta}{n}$ ,  $\frac{dx}{dt} < 0$

From 1 and 2, we have: if  $x_0 \leq \frac{\alpha}{m}$ ,  $\lim_{t\to\infty} x = \frac{\alpha}{m}$ , while from 3,4,5, we have: if  $x_0 >$  $\frac{\alpha}{m} \lim_{t \to \infty} x = \frac{\beta}{n}.$ 

## 3 January 27th, 2020

#### 3.1 Linear ODE

**Definition 3.1.** The basic form of first-order linear equation is:

$$a_1(x)\frac{dy}{dx} + a_0(x)y = b(x),$$

where  $a_1(x) \neq 0$ . The goal is given  $a_1(x), a_0(x)$  and b(x), solve for y(x).

#### Example 3.2

$$x^2y'(x) + 2y(x) = x$$

is a first order linear ODE, where  $a_1(x) = x^2$ ,  $a_0(x) = 2$ , b(x) = x.

To solve it, we first divide by  $a_1(x)$ , giving us:

$$\frac{dy}{dx} + \frac{a_0(x)}{a_1(x)}y = \frac{b(x)}{a_1(x)}.$$

which is of the standard form:

$$\frac{dy}{dx} + P(x)y = Q(x).$$

#### Example 3.3

From the previous example, we'd have:

$$y'(x) + \frac{2}{x^2}y(x) = \frac{1}{x},$$

where  $P(x) = \frac{2}{x^2}$  and  $Q(x) = \frac{1}{x}$ .

To solve this, we then multiply by  $e^{\int P(x)dx}$ , giving us:

$$e^{\int P(x)dx}\frac{dy}{dx} + P(x)e^{\int P(x)dx} = Q(x)e^{\int P(x)dx}.$$

Note that the second term is  $\frac{d}{dx} \left(e^{\int P(x)dx}\right)$ , thus by the product rule, this becomes:

$$\frac{d}{dx}\left(e^{\int P(x)dx}\right) = Q(x)e^{\int P(x)dx}.$$

If we call  $\mu(x) = e^{\int P(x)dx}$  the **integrating factor** for the ODE, we can express this as:

$$\frac{d(\mu y)}{dx} = \mu Q \implies \mu y = \int \mu Q dx + C \implies y = \frac{1}{\mu} \left( \int \mu Q dx + C \right).$$

3.1 Linear ODE ENM251 Notes

## **3.1.1** Steps for Solving $a_1(x)\frac{dy}{dx} + a_0(x)y = b(x)$

- 1. Change to standard form:  $P(x) = \frac{a_0(x)}{a_1(x)}$ ,  $Q(x) = \frac{b(x)}{a_1(x)}$ .
- 2. Compute the integrating factor:  $\mu(x) = e^{\int P(x)dx}$ .
- 3. Plug into formula:  $y(x) = \frac{1}{\mu(x)} \left( \int \mu(x) Q(x) dx + C \right)$ .

#### Example 3.4

Returning to the previous example, considering  $x^2y'(x) + 2y(x) = x$ , we have:

- $P(x) = \frac{a_0(x)}{a_1(x)} = \frac{2}{x^2}$
- $Q(x) = \frac{b(x)}{a_1(x)} = \frac{1}{x}$

We now calculate the integral factor:

$$\mu(x) = e^{\int P(x)dx} = e^{\int \frac{2}{x^2}dx} = e^{-\frac{2}{x}}.$$

Plugging into the formula, we get:

$$y(x) = \frac{1}{e^{-\frac{2}{x}}} \left( \int e^{-\frac{2}{x}} \frac{1}{x} dx + C_1 \right).$$

#### Example 3.5

Now consider  $x^2y'(x) + 2y(x) = 1$ , following the same steps, we get:

$$y(x) = \frac{1}{e^{-\frac{2}{x}}} \left( \int e^{-\frac{2}{x}} \frac{1}{x^2} dx + C_1 \right) = \frac{1}{e^{-\frac{2}{x}}} \left( \frac{1}{2} e^{-\frac{2}{x}} + C_1 \right).$$

#### Example 3.6

$$\frac{dT}{dt} = -h(T - T_R) \implies \frac{dT}{dt} + hT = hT_R,$$

which can solved with the linear method. P(t) = h,  $Q(t) = hT_R$ , giving us:

$$\mu(t) = e^{\int h dt} = e^{ht} \implies T(t) = \frac{1}{e^{ht}} \left( \int e^{ht} h T_R dt + C_1 \right)$$

$$T(t) = e^{-ht} (T_R e^{ht} + C_1) = T_R + C_1 e^{-ht}.$$

**Remark 3.7** — How to determine which method to use. Bring everything to one side:

$$\frac{dy}{dx} = F(x, y).$$

Linear ODE ENM251 Notes

- If F(x,y) = f(x)g(y), we can use the separable method.
- If F(tx, ty) = F(x, y), we can use the homogeneous method. If F(x, y) = -P(x)y + Q(x), then we can use the linear method.
- If  $F(x,y) = -P(x)y + Q(x)y^m$ , we can use the Bernoulli method.

#### 3.1.2 Bernoulli Equation

**Definition 3.8.** A Bernoulli Equation is an equation of the form:

$$\frac{dy}{dx} + P(x)y = Q(x)y^m,$$

for some number m.

#### Example 3.9

Giving initial condition v(0) = 0, solve v where:

$$\frac{dv}{dx} + \frac{1}{x}v = gv^{-1},$$

which is of the form of a Bernoulli Equation.

To solve the Bernoulli equation, we set  $y=z^{\lambda}$  and choose  $\lambda$  so that the ODE for z is easier to solve than the ODE for y. This is because we'd get:

$$\frac{dy}{dx} + P(x)y = Q(x)y^{m}$$

$$\implies \frac{dz^{\lambda}}{dx} + P(x)z^{\lambda} = Q(x)(z^{\lambda})^{m}$$

$$\implies \lambda z^{\lambda - 1} \frac{dz}{dx} + P(x)z^{\lambda} = Q(x)z^{m\lambda}.$$

Dividing by  $\lambda z^{\lambda}$ :

$$\implies \frac{dz}{dx} + \frac{1}{\lambda} P(x)z = \frac{1}{\lambda} Q(x) z^{m\lambda + 1 - \lambda}.$$

Thus we want to choose  $\lambda$  so that  $m\lambda + 1 - \lambda = 0 \implies \lambda = \frac{1}{1-m}$  where  $m \neq 1$ . If m = 1, then it is a separable equation, meaning that we have:

$$\frac{dy}{dx} = (Q(x) - P(x)) y.$$

$$\frac{dy}{dx} = (Q(x) - P(x)) dx \implies y(x) = Ae^{\int (Q(x) - P(x)) dx}.$$

3.1 Linear ODE ENM251 Notes

#### 3.1.3 Summary for Solving Bernoulli Equation

Consider

$$a_1(x)\frac{dy}{dx} + a_0(x)y = b(x)y^m.$$

- 1. First change to standard form with:  $P(x) = \frac{a_0(x)}{a_1(x)}$ ,  $Q(x) = \frac{b(x)}{a_1(1)}$
- 2. If m = 1, then, for some constant A, we have:

$$y(x) = Ae^{\int (Q(x) - P(x))dx}.$$

3. Otherwise, compute the integrating factor:

$$\mu(x) = e^{\int (1-m)p(x)dx}.$$

4. Giving us the equation:

$$y(x) = \left(\frac{1}{\mu(x)} \left( \int (1-m)\mu(x)Q(x) \ dx \right) + C \right)^{\frac{1}{1-m}}.$$

**Remark 3.10** — Note that the linear case is when m=0, which gives us the equation what we have before.

#### Example 3.11

Returning to our example earlier where we were considering  $\frac{dv}{dx} = \frac{1}{x}v = gv^{-1}$ , we have  $P(x) = \frac{1}{x}$ , Q(x) = g. Thus the integrating factor is:

$$\mu(x) = e^{\int (1 - (-1))\frac{1}{x} dx} = e^{\int \frac{2}{x} dx} = e^{2 \ln x} = x^2.$$

Thus we have:

$$v(x) = \left(\frac{1}{x^2} \left( \int (1 - (-1))x^2 g \, dx + C_1 \right) \right)^{\frac{1}{1 - (-1)}}$$
$$= \left(\frac{1}{x^2} \left( \frac{2}{3} g x^3 + C_1 \right) \right)^{\frac{1}{2}}$$
$$= \sqrt{\frac{2gx}{3} + \frac{C_1}{x^2}}.$$

Since  $v(x) = 0 \implies C_1 = 0$ , thus:

$$v(x) = \sqrt{\frac{2gx}{3}}.$$

## 4 January 29th, 2020

#### 4.1 Phase Plot

Let us consider ODE's of the form:

$$\frac{dx}{dt} = f(x) = \dot{x}.$$

If we graph x vs  $\dot{x}$  we can get a phase plot, for example:

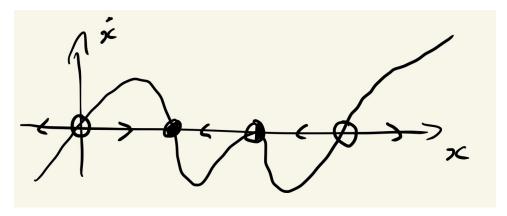


Figure 1: Phase plot of  $\dot{x} = x(x-1)(x-2)^2(x-3)^3$ 

**Definition 4.1.** A point where f(x) = 0 is called an **equilibrium point**. These equilibrium points can be unstable (empty circle), stable (filled circle), or left/right stable (half filled circle).

## 4.2 Computing Times

Since  $\dot{x} = f(x)$ , is separable, since  $dt = \frac{dx}{f(x)}$ , we have:

$$\int_{t_1}^{t_2} dt = \int_{x_1}^{x_2} \frac{dx}{f(x)} \implies t_2 - t_1 = \int_{x_1}^{x_2} \frac{dx}{f(x)}.$$

Which is the time interval between when  $x = x_1$  and  $x = x_2$ .

#### Example 4.2

Let us try to compute the period of an object with mass m to travel from one end of a bowl to the other with radius R. TL;DR we get:

$$\frac{d\theta}{dt} = \sqrt{\frac{2g}{R}\cos(\theta)}.$$

Rearranging gives us:

$$dt = \sqrt{\frac{R}{2g\cos\theta}}d\theta \implies \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \frac{d\theta}{\sqrt{\cos(\theta)}} \approx \sqrt{\frac{R}{2g}}5.244.$$

## 4.3 Exact Equations

Whenever you have a function of form  $\frac{dy}{dx} = F(x,y)$ , you can always rewrite it in the form:

$$M(x,y)dx + N(x,y)dy = 0.$$

This might look familiar, as if we have f(x,y) = C, we have:

$$df = \frac{\partial f}{\partial x}dx + \frac{\partial f}{\partial y}dy = 0.$$

As such, we'd like to ask when can M(x,y)dx+N(x,y)dy=0 be written as  $\frac{\partial f}{\partial x}dx+\frac{\partial f}{\partial y}dy=0$ . It would be great if  $M=\frac{\partial f}{\partial x}$  and  $N=\frac{\partial f}{\partial y}$ , so it's helpful to know when we can do this. Consider

$$\frac{\partial M}{\partial y} = \frac{\partial}{\partial y} \frac{\partial f}{\partial x} = \frac{\partial^2 f}{\partial y \partial x}$$
 and  $\frac{\partial N}{\partial x} = \frac{\partial^2 f}{\partial x \partial y}$ .

As such, if

$$\frac{\partial M}{\partial y} = \frac{\partial N}{\partial x},$$

then Mdx + ndy = 0 is called exact.

#### Example 4.3

 $2xydx + (x^2 - y^2)dy = 0 \text{ is exact.}$ 

#### Example 4.4

 $2x^2ydx + (x^3 - y^2)dy = 0 \text{ is not exact.}$ 

Note that the two examples differ by a factor x, meaning that we have a further condition to determine whether something is exact.

## 5 January 31st, 2020

#### 5.1 Problem 1

Find period of motion for the equation:

$$\dot{\theta} = \sqrt{\frac{g}{L}(3 + 2\cos\theta)} \quad 0 \le \theta \le 2\pi.$$

Since the RHS only has  $\theta$ , this is separable, thus:

$$\int dt = \sqrt{\frac{L}{g}} \int \frac{d\theta}{\sqrt{3 + 2\cos(\theta)}}$$

Note that the RHS gives us an elliptical equation. Since we want the period, we have:

$$T = \sqrt{\frac{L}{g}} \int_0^{2\pi} \frac{d\theta}{3 + 2\cos\theta} + C.$$

We can consider C to be the start time, and just set it to 0. This is as far as you can go analytically, so plug it into a calculator.

5.2 Problem 3 ENM251 Notes

#### 5.1.1 How to use in MATLAB

```
T = integral(@(theta)1./sqrCos(1,theta),2,2*pi)
tspan = [0 2.5];
y0 = 0;
data = ode45(@sqrCos,tspan,y0);

function res = sqrCos(t,theta)
    L = 2,4;
    g = 9,8;
    res = sqrt(g/L*(3+2*cos(theta)));
end(function)
```

#### 5.2 Problem 3

Consider the equation

$$v\frac{dv}{dx} + \frac{v^2}{x + \frac{m}{\rho}} = g.$$

With the initial condition:  $v_0 = v(x_0) = v(0) = 0$ . To solve for v(x), note that this is a Bernoulli equation:

$$\frac{dv}{dx} + \frac{1}{x + \frac{m}{\rho}}v = g^{v-1}.$$

with:

$$p(x) = \frac{1}{x + \frac{m}{\rho}}$$
  $Q(x) = g$   $n = -1$ .

Plugging into the formula, we have:

$$V(x) = \left(\frac{1}{\mu(x)} \left( \int (1-n)\mu(x)Q(x)dx + C \right) \right)^{\frac{1}{1-n}}.$$

Calculating the integrating factor, we have:

$$\mu(x) = e^{\int (1-n)P(x)dx} = e^{2\ln(x+\frac{m}{\rho})} = \left(x+\frac{m}{\rho}\right)^2.$$

Thus we have:

$$V(x) = \left(\frac{1}{\left(x + \frac{m}{\rho}\right)^2} \left(2 \int \left(x + \frac{m}{\rho}\right)^2 g \, dx + C\right)\right)^{\frac{1}{2}}$$

$$V(x) = \left(\frac{1}{\left(x + \frac{m}{\rho}\right)^2} \left(\frac{2}{3} \left(x + \frac{m}{\rho}\right)^3 + C\right)\right)^{\frac{1}{2}} = \frac{1}{x + \frac{m}{\rho}} \sqrt{\frac{2}{3} \left(x + \frac{m}{\rho}\right)^3 g + C}.$$

Plugging in the initial condition, we get:  $C = -\frac{2}{3} \frac{m^3}{\rho^3} g$ , giving us:

$$v(x) = \frac{1}{x + \frac{m}{\rho}} \sqrt{\frac{2}{3} \left(x + \frac{m}{\rho}\right)^3 g - \frac{2}{3} \left(\frac{m}{\rho}\right)^3 g}.$$

The acceleration is:

$$g - \frac{v^2}{x + \frac{m}{\rho}}.$$

## 6 February 3rd, 2020

## 6.1 Exact Equations

Remember that an exact equation is one where:

$$Mdx + Ndy = 0.$$

Where:

$$\frac{\partial M}{\partial y} = \frac{\partial N}{\partial x}.$$

Consider the exact equation:

$$(y^2 - x^2)dx + 2xydy = 0.$$

To solve this exact ODE, we set:

$$\frac{\partial f}{\partial x} = M = y^2 - x^2 \implies \int_x (y^2 - x^2) dx + c_1(y) \implies f(x, y) = y^2 x - \frac{x^3}{3} + c_1(y).$$

Now if we take the partial with respect to y, we get:

$$\frac{\partial f}{\partial y} = 2yx + c_1'(y) = N = 2xy \implies c_1'(y) = 0 \implies c_1(y) = c_2.$$

This tells:

$$f(x,y) = y^2x - \frac{1}{3}x^3 + c_2$$

satisfies both equations meaning that the solution to our ODE is of the form:

$$f(x,y) = xy^2 - \frac{1}{3}x^3 = C.$$

If we have an initial condition, then this will give us a unique solution.

#### Example 6.1

Consider the equation:  $2xy^2dx + (2x^2y - y^3)dy = 0$ . To solve this, we do the following:

$$\int_{T} 2xy^{2} dx = x^{2}y^{2} + c_{1}(y) \implies 2x^{2}y + c'_{1}(y) = 2x^{2}y - y^{3} \implies c_{1} = -\frac{y^{4}}{4}$$

Thus we have:

$$f(x,y) = 2x^2y^2 - \frac{1}{4}y^4 + C.$$

## 6.2 Inexact Equations

If Mdx + Ndy = 0 is not exact, then we try to introduce an integrating factor  $\mu(x, y)$  to turn make  $\mu Ndx + \mu Ndy = 0$ . Thus we want:

$$\frac{\partial \mu M}{\partial y} = \frac{\partial \mu N}{\partial x}.$$

However this is usually as difficult to solve as the original equation. There are some special cases though:

•  $\mu(x,y) = \mu(x)$ . If this is the case, we have:

$$\frac{\partial \mu M}{\partial y} = \frac{\partial \mu N}{\partial x} \implies \mu \frac{\partial M}{\partial y} = \frac{d\mu}{dx} N + \mu \frac{\partial N}{\partial x}$$

$$\implies \mu \left( \frac{\partial M}{\partial y} - \frac{\partial N}{\partial x} \right) = \mu'(x) N \implies \frac{\mu'(x)}{\mu(x)} = \frac{\frac{\partial M}{\partial y} - \frac{\partial N}{\partial x}}{N}$$

and if the RHS is a function of only x, we can integrate, giving us:

$$\mu(x) = \exp\left\{\int \frac{\left(\frac{\partial m}{\partial y} - \frac{\partial N}{\partial x}\right)}{N} dx\right\}.$$

With this, we will be able to solve the differential equation with  $\frac{\partial f}{\partial x} = \mu M$  and  $\frac{\partial f}{\partial y} = \mu N$ . This is true if:

$$\frac{\frac{\partial M}{\partial y} - \frac{\partial N}{\partial x}}{N} = k(x).$$

i.e. it's a function of only x

•  $\mu(x,y) = \mu(y)$ . Same thing but with y instead of x. We check if:  $\frac{\frac{\partial N}{\partial x} - \frac{\partial M}{\partial y}}{y}$  is a function of only y. We will have:

$$\mu(y) = \exp\left\{\frac{\frac{\partial N}{\partial x} - \frac{\partial M}{\partial y}}{m}\right\}.$$

#### Example 6.2

Consider the equation  $2xydx + (2x^2 - y^2)dy = 0$ . Note that this is not exact. As such, we check:

$$\frac{\frac{\partial M}{\partial y} - \frac{\partial N}{\partial x}}{N} = \frac{2x - 4x}{2x^2 - y^2} = \frac{2x}{2x^2 - y^2} \neq \text{ a function of only } x.$$

$$\frac{\frac{\partial N}{\partial x} - \frac{\partial M}{\partial y}}{M} = \frac{4x - 2x}{2xy} = \frac{1}{y}.$$

Thus we have:

$$\mu(y) = e^{\int \frac{1}{y} dy} = e^{\ln y} = y.$$

#### Example 6.3

Consider  $\frac{dy}{dx} = \frac{2x^2 - y^2}{3xy}$ , rearranging gives us:

$$(x^2 - 2y^2)dx + 3xydy = 0.$$

Note that  $\frac{\partial M}{\partial y} = -4y$  and  $\frac{\partial N}{\partial x} = 3y$ , thus it is not exact. Now we try:

$$\frac{\frac{\partial M}{\partial y} - \frac{\partial N}{\partial x}}{N} = \frac{-4y - 3y}{3xy} = \frac{-7}{3x}.$$

Which is a function of only x. As such, we have:

$$\mu(x) = e^{\int -\frac{7}{3x}dx} = x^{-\frac{7}{3}}.$$

Multiplying this in gives us:

$$(x^{-\frac{1}{3}} - 2x^{-\frac{7}{3}}y^2)dx + 3x^{-\frac{4}{3}}ydy = 0,$$

which is exact since:

$$\frac{\partial M}{\partial y} = -4x^{-\frac{7}{3}}y \quad \frac{\partial N}{\partial x} = -4x^{-\frac{7}{3}}y.$$

Solving this gives us:

$$f(x,y) = \int_{x} x^{-\frac{1}{3}} - 2x^{-\frac{7}{3}} y^{2} dx = \frac{3}{2} x^{\frac{2}{3}} + \frac{3}{2} x^{-\frac{4}{3}} y + c_{1}(y).$$
$$\frac{3}{2} x^{-\frac{4}{3}} y + c'_{1}(y) = \frac{3}{2} x^{-\frac{4}{3}} y \implies c_{1} = C.$$

Thus

$$f(x,y) = \frac{3}{2}x^{\frac{2}{3}} + \frac{3}{2}x^{-\frac{4}{3}}y^2 = C.$$

## 7 February 5th, 2020

## 7.1 Applications

Given the family of curves  $u(x,y) = c_1$ , the family of curves orthogonal to these are the solution to:

$$\frac{\partial u}{\partial x}dy = \frac{\partial u}{\partial y}dx.$$

#### 7.1.1 2nd-Order ODE

**Definition 7.1.** The general form of a 2nd order differential equation is:

$$y'' = F(x, y, y').$$

Where x is the independent variable and y is the dependent variable.

We want to consider a few special cases. The first one is when the dependent variable is missing, y'' = f(x, y'), for example y'' = x - y'. In this case, you can set v = y' v' = y'', giving us:

$$v' = f(x, v)$$

which is a first order equation. Thus we can solve the first order ODE and then integrate to get y.

#### Example 7.2

Consider the earlier equation y'' = x - y', we have:

$$v' = x - v \implies \frac{dv}{dx} + v = x$$

$$v = e^{-x}((x - 1)e^x + c_1) = x - 1 + c_1e^{-x} = \frac{dy}{dx}.$$

$$y = \frac{1}{2}x^2 + x + c_2e^{-x} + c_3.$$

for some constants  $c_2$  and  $c_3$ .

**Remark 7.3** — Note that for a first order ODE, there should be one arbitrary constant, but for second order, there should be 2.

The second case is where the independent variable is missing, meaning:

$$\frac{d^2y}{dx^2} = F(y, \frac{dy}{dx}) \implies \frac{dv}{dx} = \frac{dv}{dy}\frac{dy}{dx} = v\frac{dv}{dx} = F(y, v).$$

Where v is once again  $\frac{dy}{dx}$ . Using this, we can solve for v in terms of y and then integrate twice.

## 8 February 10th, 2020

#### 8.1 Review from MATH 240

Consider the homogenous equation:

$$a_2(x)y''(x) + a_1y'(x) + a_0(x)y(x) = 0.$$

Note that this is homogeneous since y(x) = 0 is a valid solution. A general solution to a 2nd order lienar homogeneous ODE can be expressed as

$$y(x) = c_1 y_1(x) + c_2 y_2(x),$$

where  $c_1$  and  $c_2$  are arbitrary constrants and  $y_1(x)$  and  $y_2(x)$  are any two solutions to the ODE for which:

$$\underbrace{y_1(x)y_2'(x) - y_1'(x)y_2(x)}_{\text{Wronskian of } y_1 \text{ and } y_2} \neq 0.$$

Note that the LHS can be experssed as a determinant:

$$\det \left( \begin{bmatrix} y_1(x) & y_2(x) \\ y_1'(x) & y_2'(x) \end{bmatrix} \right).$$

Which is known as the **Wronskian** of  $y_1$  and  $y_2$ .

#### Example 8.1

Consider y''(x) - 3y'(x) + 3y(x) = 0, we have:

$$y_1(x) = e^x$$
  $y_2(x) = e^{2x}$ .

and

$$\det\left(\begin{bmatrix} y_1 & y_2 \\ y_1' & y_2' \end{bmatrix}\right) = \det\left(\begin{bmatrix} e^x & e^{2x} \\ e^x & e^{2x} \end{bmatrix}\right) = 2e^{3x} - e^{3x} = e^{3x} \neq 0.$$

Meaning that the solution is of the form:

$$y(x) = c_1 e^x + c_2 e^{3x}.$$

**Remark 8.2** — Note that we only need the Wronskian to not be the 0 function, and that it's ok for certain values of x for the Wronkian to be 0.

#### Example 8.3

If we used  $y_1(x) = e^x$  and  $y_2(x) = 2e^x$ , then we'd get a Wronskian equal to 0, which would not work.

#### 8.2 Constant Coefficients

Consider:

$$ay''(x) + by'(x) + cy(x) = 0,$$

where a, b and c are constants.

#### Example 8.4

Example 8.1 is an example of a constant equation with a = 1, b = -3, and c = 2.

Let us create a table to help us solve this problem. First we contstruct the descriminant:  $D = b^2 - 4ac$ . Depending on what value D is, we have:

 $\begin{array}{c|cccc} D & y_1(x) & y_2(x) \\ \hline D < 0 & e^{\alpha x} \cos(\beta x) & e^{\alpha x} \sin(\beta x) & \alpha = -\frac{b}{2a} \ \beta = \sqrt{-D}/2a \\ \hline D = 0 & e^{\alpha x} & xe^{\alpha x} & \alpha = -\frac{b}{2a} \\ \hline D > 0 & e^{\alpha x} \cosh(\gamma x) & e^{\alpha x} \sinh(\gamma x) & \alpha = -\frac{b}{2a} \ \gamma = \sqrt{D}/2a \\ & e^{(\alpha - \gamma)x} & e^{(\alpha + \gamma)x} & \alpha = -\frac{b}{2a} \ \gamma = \sqrt{D}/2a \end{array}$ 

Table 1: Table to Compute ay'' + by' + cy = 0

#### Example 8.5

Consider 4y'' + y' + y = 0. The discriminant is  $D = b^2 - 4ac = -15 < 0$ . Using the first row of the previous table, we have:

$$\alpha = -\frac{1}{8} \quad \beta = \frac{\sqrt{15}}{8}.$$

This means that:

$$y(x) = c_1 e^{-\frac{1}{8}x} \cos\left(\frac{x\sqrt{15}}{8}\right) + c_2 e^{-\frac{1}{8}x} \sin\left(\frac{x\sqrt{15}}{8}\right).$$

#### Example 8.6

Consider 4y'' + 4y' + y = 0. Note that  $D = b^2 - 4ac = 16 - 16 = 0$ , thus using the second row, we have:

$$\alpha = -\frac{b}{2a} = -\frac{4}{8} = -\frac{1}{2}.$$

Thus we have:

$$y(x) = c_1 e^{-\frac{1}{2}x} + c_2 x e^{-\frac{1}{2}x}.$$

#### Example 8.7

Consider y'' - 3y' + 2y = 0, note that D > 0. We can either use the third or 4th row of the table. First we have:

$$\alpha = \frac{3}{2} \quad \gamma = \frac{1}{2}.$$

Thus we can write this as either:

$$y(x) = c_1 e^{\frac{3}{2}x} \cosh(\frac{1}{2}x) + c_2 e^{\frac{3}{2}x} \sinh(\frac{1}{2}x)$$

or

$$y(x) = c_1 e^{(\frac{3}{2} - \frac{1}{2})x} + c_2 e^{(\frac{3}{2} + \frac{1}{2})x} = c_1 e^x + c_2 e^{2x}$$

## 8.3 Cauchy-Euler/Equidimentional Equation

**Definition 8.8.** A **equidimensional** or **Cauchy-Euler** 2nd order linear homogenous ODE is a equation of the form:

$$ax^2y''(x) + bxy'(x) + cy(x) = 0.$$

for some constant a, b, c.

## **Remark 8.9** — Note that the exponent of the x matches the derivative of y.

Again, we can just use a table to solve these equations by checking the value of

$$D = (b-a)^2 - 4ac.$$

Table 2: Table to solve Cauchy-Euler Equations

D	$y_1(x)$	$y_2(x)$	
D < 0	$ x ^{\alpha}\cos(\beta \ln x )$	$ x ^{\alpha}\sin(\beta\ln x )$	$\alpha = -\frac{b-a}{2a} \beta = \sqrt{-D/2a}$
D=0	$ x ^{\alpha}$	$ x ^{\alpha} \ln  x $	$\alpha = -\frac{b-a}{2a}$
D > 0	$ x ^{\alpha} \cosh(\gamma \ln  x )$	$ x ^{\alpha} \sinh(\gamma \ln  x )$	$\alpha = -\frac{b-a}{2a} \ \gamma = \sqrt{D/2a}$
	$ x ^{\alpha-\gamma}$	$ x ^{\alpha+\gamma}$	$\alpha = -\frac{b-a}{2a} \gamma = \sqrt{D}/2a$

#### Example 8.10

Consider  $3x^2y'' + 2xy' + 5y = 0$ , where a = 3, b = 2, c = 5. Note that:

$$d = (b-a)^2 - 4ac = (2-3)^2 - 4(3)(5) = -59 < 0.$$

Thus we have:

$$\alpha = -\frac{b-a}{2a} = \frac{1}{6}, \quad \beta = \frac{\sqrt{59}}{6}.$$

Thus we have:

$$y(x) = c_1 x^{\frac{1}{6}} \cos(\frac{\sqrt{59}}{6} \ln x) + c_2 x^{\frac{1}{6}} \sin(\frac{\sqrt{59}}{6} \ln x).$$

for x > 0.

#### Example 8.11

Consider  $x^2y'' + 2xy' - 2y = 0$ , x > 0, i.e. a = 1, b = 2, c = -2. Note that  $D = (b-a)^2 - 4ac = 9 > 0$ , thus we have:

$$\alpha = \frac{-(2-1)}{2(1)} = -\frac{1}{2}$$
  $\gamma = \frac{\sqrt{9}}{2(1)} = \frac{3}{2}$ .

With the general solution being:

$$y(x) = c_1 x^{-\frac{1}{2}} \cosh(\frac{3}{2} \ln x) + c_2 x^{-\frac{1}{2}} \sinh(\frac{3}{2} \ln x).$$

or

$$y(x) = c_1 x^{-2} + c_2 x.$$

#### 8.4 Other Stuff from Math 240

If we once again consider the equation  $a_2(x)y''(x) + a_1(x)y'(x) + a_0y(x) = 0$ . Note that as we mentioned earlier, we need two linearly independent non-zero solutions to get the general solution. If we only have one, say  $y_1(x)$ , a second linearly independent solution  $y_2(x)$  can be constructed using **Abel's equation**:

$$y_2(x) = Ay_1(x) \int \frac{e^{-\int \frac{a_1(x)}{a_2(x)} dx}}{y_1^2(x)} dx.$$

For any non-zero constant A.

**Remark 8.12** — Derivation is in the notes.

#### Example 8.13

Consider xy'' + (1-x)y' - y = 0. Suppose we're told that one solution is  $y_1(x) = e^x$ . A second solution would be:

$$y_2(x) = Ae^x \int \frac{e^{-\int \frac{1-x}{x}} dx}{(e^x)^2} dx.$$

$$= Ae^x \int \frac{e^{\int 1 - \frac{1}{x} dx}}{e^{2x}} dx = Ae^x \int \frac{e^{x - \ln x}}{e^{2x}} dx = Ae^x \int \frac{e^{-x}}{x} dx.$$

Which doesn't have a nice answer (oops)

**Remark 8.14** — Note that whenever  $a_2(x) + a_1(x) + a_0(x) = 0$ , one solution is always  $y_1(x) = e^x$ , since we'd have  $y'' = y' = y = e^x$ .

#### Example 8.15

Consider (1-x)y'' + xy' - y = 0. Since we have  $y_1(x) = e^x$ , we have:

$$y_2(x) = Ae^x \int \frac{e^{-\int \frac{x}{1-x} dx}}{(e^x)^2} dx.$$

$$y_2(x) = Ae^x \int \frac{e^{x+\ln(x-1)}}{e^{2x}} dx = Ae^x \int \frac{x-1}{e^x} dx = Ae^x(-xe^{-x}) = -Ax.$$

Picking A = -1, we have:  $y_2(x) = x$ , thus the general solution would be:

$$y(x) = c_1 e^x + c_2 x.$$

## 8.5 Non-Homogeneous Equations

Now let's consider non-homogeneous equations:

$$a_2(x)y''(x) + a_1(x)y'(x) + a_0y(x) = b(x).$$

A general solution is given by:

$$y(x) = c_1 y_1(x) + c_2 y_2(x) + y_p(x).$$

Where  $c_1, c_2$  are arbitrary constants,  $y_1, y_2$  are two linearly independent solutions to the homogeneous equation (where b(x) = 0), and  $y_p$  is any **particular solution** to the non-homogeneous equation.

When  $\frac{b(x)}{a_0(x)}$  = a constant, then  $y_p(x) = \frac{b(x)}{a_0(x)}$  works, otherwise:

$$y_p(x) = \int^x G(t, x) \frac{b(t)}{a_2(t)} dt.$$

Where:

$$G(t,x) = \frac{y_1(t)y_2(x) - y_1(x)y_2(t)}{y_1(t)y_2'(y) - y_1'(t)y_2(t)}.$$

**Remark 8.16** — G(t,x) is known as the **Green's function** associated with the ODE.

**Remark 8.17** — When solving the integral, treat all x's as constant, then afterwards, replace all t 's with x 's.

#### Example 8.18

Consider the equation solved in 8.15 but with  $b(x) = (x-1)^2$ , i.e.:

$$(1-x)y'' + xy' - y = (x-1)^2.$$

We have:

$$y_1(x) = e^x \quad y_2(x) = x.$$

$$y_1'(x) = e^x \quad y_2(x) = 1.$$

Thus we have:

$$G(t,x) = \frac{e^t x - e^x t}{e^t(1) - e^t t} = \frac{x - te^{x-t}}{1 - t}.$$

Thus we have:

$$y_p(x) = \int_0^x \frac{x - te^{x - t}}{1 - t} \frac{(t - 1)^2}{1 - t} dt = \int_0^x x - te^{x - t} dt = xt - e^x (t - 1)e^{-t} \Big|_0^x = x^2 - x + 1.$$

## 9 February 12th, 2020

## 9.1 Example Mass/Spring/Damper System

We have a mass m > 0 attached to a spring with spring coefficient k > 0 and a dampener with coefficient  $b \ge 0$ . If we assume no coefficient of friction, we get

$$-k - x - b\dot{x} = m\ddot{x}.$$

Which can be rearranged to:

$$m\ddot{x} + b\dot{x} + kx = 0.$$

Which is a 2nd-order linear homogeneous ODE with constant coefficients, which we can use the table from earlier to solve. If we include an external force acting on the mass, we would have:

$$m\ddot{x} + b\dot{x} + kx = F(t) \tag{3}$$

Which would make it non homogeneous. There is an analog circuit equivalent called the LCR circuit, which would have an equation:

$$L\ddot{Q} + R\dot{Q} + \frac{1}{C}Q = \Delta V.$$

Which is of the same form as Equation 3.

Let us consider the case without a driving force F(t):

$$\ddot{x} + \frac{b}{m}\dot{x} + \frac{k}{m}x = 0.$$

First, we will denote  $\omega = \sqrt{\frac{k}{m}}$  which represents the **angular frequency** of the system, with units rad per sec, and  $\gamma = \frac{b}{2\sqrt{mk}}$  be a **dampening ratio** (which represents how much dampening is in the system), making the equation:

$$\ddot{x} + 2\gamma\omega\dot{x} + \omega^2 x = 0.$$

Note that discriminant of this equation is:

$$D = \frac{b^2}{m^2} - 4\frac{k}{m} = \frac{4k}{m} \left( \frac{b^2}{4\sqrt{mk}} - 1 \right) = 4\omega^2(\gamma^2 - 1).$$

Now depending on what  $\gamma$  and  $\omega$  are, we can analyze the behaviour of the system.

## 9.2 No Dampening $(\gamma = 0)$

In this case, we would have:

$$\ddot{x} + \omega^2 x = 0.$$

The discriminant is thus:

$$D = 0^2 - 4(1)(\omega^2) = -4\omega^2 < 0.$$

Using the table, we have:

$$\alpha = -\frac{0}{2(1)} = 0, \quad \beta = \frac{\sqrt{-(-4\omega^2)}}{2(1)} = \omega.$$

Thus the solution will just be:

$$x(t) = c_1 \cos(\omega t) + c_2 \sin(\omega t).$$

If we want to find the constants, note that  $x(0) = x_0 = c_1$ . Meanwhile, differentiating the equation, we have:

$$v(t) = -c_1 \omega \sin(\omega t) + \omega c_2(\omega t).$$

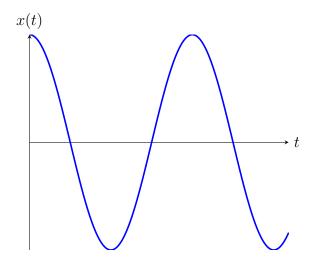


Figure 2: Example of Underdamped Motion

$$v(0) = v_0 = \omega c_2.$$

Thus the complete solution is:

$$x(t) = x_0 \cos(\omega t) + \frac{v_0}{\omega} \sin(\omega t).$$

This is just a sin curve with amplitude:  $A = \sqrt{x_0^2 + \left(\frac{v_0}{\omega}\right)^2}$  and period:  $T = \frac{2\pi}{\omega}$ .

**Remark 9.1** — Note that the period does not depend on  $x_0$  or  $v_0$ , i.e. it doesn't depend on how it starts. This is different from SHM.

## 9.3 Under Damping $(0 < \gamma < 1)$

Returning to our equation, we have:

$$\ddot{x} + 2\gamma\omega\dot{x} + \omega^2 x = 0.$$

Thus the determinant is:

$$D = (2\gamma\omega)^2 - 4(1)(\omega^2) = 4w^2(\gamma^2 - 1).$$

If  $0 < \gamma < 1$ , we have D < 0, giving us:

$$\alpha = \frac{-(2\gamma\omega)}{2(1)} = -\gamma\omega, \quad \beta = \frac{\sqrt{-D}}{2(1)} = \omega\sqrt{1-\gamma^2}.$$

Plugging this into the equation, we get:

$$x(t) = c_1 e^{-\gamma \omega t} \cos(\omega t \sqrt{1 - \gamma^2}) + c_2 e^{-\gamma \omega t} \sin(\omega t \sqrt{1 - \gamma^2}).$$

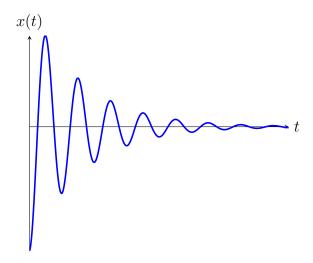


Figure 3: Example of Underdamped Motion

**Remark 9.2** — Note that there will be infinite oscillations where the amplitude is decreasing to 0.

## 9.4 Critical Damping ( $\gamma = 1$ )

Notice in the case of  $\gamma = 1$ , we have D = 0, thus the solution is:

$$x(t) = c_1 e^{-\gamma \omega t} + c_2 t e^{-\gamma \omega t}.$$

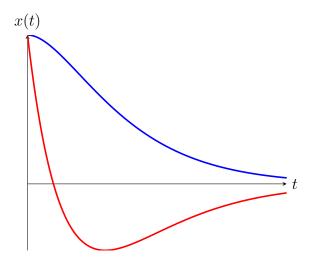


Figure 4: Example of Critical Damped / Over Damped Motion

**Remark 9.3** — Note that in this case, there are no oscillations. There will never be two dips. This is because we have:

$$x(t) = c_1 e^{-\gamma \omega t} + c_2 t e^{-\gamma \omega t} = (c_1 + c_2 t) e^{-\gamma \omega t}.$$

Thus by looking at the sign of  $c_1$  and  $c_2$ , it will either never cross the x axis (if same

sign) or only cross it once (if signs are different). This can be shown by looking at the roots of the equation above.

## 9.5 Over Damping $(\gamma > 1)$

This yields D > 0, thus:

$$x(t) = c_1 e^{-\gamma \omega t} \cosh(\gamma t \sqrt{\gamma - 1}) + c_2 e^{-\gamma \omega t} \sinh(\omega t \sqrt{\gamma^2 - 1}).$$

**Remark 9.4** — This is the case where we are taking away the energy a lot, which is useful in many cases. This will make it go to 0 a lot faster than critical damping. Thus for car suspension, we would rather it be critically damped than over damped.

**Remark 9.5** — In circuits, this is analogous to using resistors to take away heat from the circuit.

## 9.6 Laplace Transforms

Laplace transforms are a special case of integral transforms. One way to think of an integral transform is that it's a function where the input is a function of t and output a function of s.

**Definition 9.6.** More specifically, a **integral transform** is of form:

$$\int_{\alpha(s)}^{\beta(s)} f(t)K(s,t) dt.$$

Where K(s,t) is the **kernel** of the transform, and  $\alpha(s)$  and  $\beta(s)$  are the upper and lower limit.

#### Example 9.7

Consider the case where  $\alpha(s) = s$ ,  $\beta(s) = s^2$ , K(s,t) = st, and an input  $f(t) = t^3$ . Then the output would be:

$$\int_{s}^{s^{2}} t^{3}(st) dt = \frac{st^{5}}{5} \Big|_{t=s}^{t=s^{2}} = \frac{1}{5} (s^{11} - s^{6}) = F(s).$$

**Definition 9.8.** Typically, we represent this integral transform as  $T\{f(t)\} = F(s)$ .

**Definition 9.9.** The **Laplace Transform** is a special case where:

$$\alpha(s) = 0$$
  $\beta(s) = \infty$   $K(s,t) = e^{-st}$ ,

in other words:

$$\mathcal{L}{f(t)} = \int_0^\infty f(t)e^{-st} dt = F(s).$$

**Remark 9.10** — Note that st must be unitless, and if t represents time, then s represents frequency, thus making the Laplace transform a transformation from time space into frequency space.

#### Example 9.11

We have

$$\mathcal{L}\{1\} = \int_0^\infty e^{-st} dt = \frac{e^{-st}}{-s} \Big|_0^\infty = \frac{1}{s}.$$

Note that s > 0

In order to go from s-space back to t-space, we take the inverse Laplace transform. This will be unique as long as we don't consider null functions.

**Definition 9.12.** A **null function** is a function that is zero except for finitely many points.

#### Example 9.13

An example of a null function is:

$$N(t) = \begin{cases} 1, & t = 0 \\ 2, & t = 1 \\ 0, & \text{otherwise} \end{cases}.$$

These null functions do not appear often for our situation, so we can have a Laplace transform table:

Table 3: Laplace Transform Table

$$\begin{array}{c|cc}
1 & \frac{1}{s} & s > 0 \\
e^{at} & \frac{1}{s-a} & s > a \\
\hline
sin(\omega t) & \frac{\omega}{s^2 + \omega^2} & s > 0 \\
\hline
cos(\omega t) & \frac{s}{s^2 + \omega^2} & s > 0 \\
\hline
\vdots & \vdots$$

**Remark 9.14** — Using the table, one example is:  $\mathcal{L}^{-1}\left\{\frac{s}{s^2+\omega^2}\right\}$ 

## 10 February 14th, 2020

#### 10.1 Problem 1 - Solution 1

Consider

$$u''(r) + \frac{1}{r}u'(r) = -H.$$

With constraints:

$$u(a) = T_e \quad |u(0)| < \infty.$$

Let us take v = u'(r), which gives us:

$$v'(r) + \frac{1}{r}v = -H.$$

which is a linear first order ODE, giving us:

$$v(r) = \frac{1}{\mu(r)} \left( \int \mu(r)(-H)dr + C_1 \right), \quad \mu(r) = e^{\int \frac{1}{r}dr} = r.$$

Thus:

$$v(r) = \frac{1}{r} \left( \int -rH \ dr + C_1 \right) = \frac{1}{r} \left( -\frac{1}{2} r^2 H + C_1 \right).$$

$$v(r) = -\frac{1}{2} r H + \frac{1}{r} C_1 = u'(r).$$

$$\implies u(r) = \int -\frac{1}{2} r H + \frac{1}{r} C_1 \ dr = -\frac{1}{4} r^2 H + \ln(r) C_1 + C_2.$$

To solve for constants, we apply initial conditions:

$$|u(0)| = |-\frac{1}{4}(0)^2 H + \ln(0)C_1 + C_2| < \infty \implies C_1 = 0.$$

$$\implies u(a) = -\frac{1}{4}Ha^2 + C_2 = T_e \implies C_2 = T_e + \frac{1}{4}Ha^2.$$

Thus we have:

$$u(r) = T_e + \frac{1}{4}H(a^2 - r^2).$$

### 10.2 Problem 1 - Solution 2

We once again consider  $u''(r) + \frac{1}{r}u'(r) = -H$ . First we will solve the homogeneous equation:

$$u_h''(r) + \frac{1}{r}u_h'(r) = 0 \implies r^2u_h''(r) + ru_h'(r) = 0.$$

which is equidimensional. As such we just need to find the discriminant with a=1,b=1,c=0:

$$D = (b-a)^2 - 4ac = (1-1)^2 - 0 = 0.$$

Using the table, we have:

$$u_1(r) = |r|^{\alpha} \ln(r) \quad u_2(r) = |r|^{\alpha}.$$

with

$$\alpha = -\frac{b-a}{2a} = 0.$$

Thus:

$$u_1(r) = \ln(r)$$
  $u_2(r) = 1$ .

Thus the overall homogeneous solution is:

$$u_h = C_1 \ln(r) + C_2.$$

10.3 Problem 2 ENM251 Notes

Now we need to find the particular solution using Green's Function:

$$G(t,r) = \frac{u_1(t)u_2(r) - u_1(r)u_2(t)}{u_1(t)u_2'(t) - u_1'(t)u_2(t)} = \frac{\ln(t) - \ln(r)}{-\frac{1}{t}} = t\ln(r) - t\ln(t).$$

Using this, we have:

$$u_p(r) = \int_{-r}^{r} G(t, r)g(t)dt = \int_{-r}^{r} (t \ln(r) - t \ln(t))(-H) dt.$$

$$= -H \ln(r) \int_{-r}^{r} t \, dt + H \int_{-r}^{r} t \ln(t) \, dt = \frac{1}{2} r^{2} H \ln(r).$$

Integrating by parts, with:

$$u = \ln(t)$$
  $dv = t dt$ 

$$du = \frac{1}{t} dt \quad v = \frac{1}{2}t^2.$$

we have:

$$\int_{-\tau}^{\tau} t \ln(t) dt = \frac{1}{2} t^2 \ln(t) - \int_{-\tau}^{\tau} \frac{1}{2} t dt = \frac{1}{2} t^2 \ln(t) - \frac{1}{4} t^2 \bigg|_{t=\tau}.$$

Giving us  $u_p(r) = -\frac{1}{4}r^2H$ , thus giving us:

$$u_h + u_p = C_1 \ln(r) + C_2 - \frac{1}{4}r^2H.$$

Which is the same as the other solution before plugging in the initial conditions.

#### 10.3 Problem 2

Consider the equation:

$$\ddot{x} + \omega^2 x = \ddot{x} + \frac{g}{L}x = g.$$

where  $\omega = \sqrt{\frac{g}{L}}$  and initial conditions:

$$x(0) = 0$$
  $\dot{x}(0) = 0$ .

This has constant coefficients, with  $a=1,b=0,c=\omega^2$ , thus the discriminant is:

$$D = b^2 - 4ac = -4\omega^2 < 0.$$

Thus we have:

$$x_1 = e^{\alpha t} \cos(\gamma t)$$
  $x_2 = e^{\alpha t} \sin(\gamma t)$ .

with:

$$\gamma = \frac{\sqrt{-D}}{2a} = \omega \quad \alpha = -\frac{b}{2a} = 0.$$

Thus:

$$x_h = C_1 \cos(\omega t) + C_2 \sin(\omega t).$$

Now we need a particular solution. Looking back at the original equation, we can guess  $x_p = L$ . Since:

$$0 + \frac{g}{L}L = g.$$

10.3 Problem 2 ENM251 Notes

Because of the existence-uniqueness theorem, this is the only solution that will work, meaning that overall solution before initial conditions is:

$$x(t) = C_1 \cos(\omega t) + C_2 \sin(\omega t) + L.$$

Applying initial conditions, we have:

$$x(0) = C_1(1) + C_2(0) + L = 0 \implies C_1 = -L.$$

$$\dot{x}(0) = -L\omega \sin(0) + C_2\omega \cos(0) = 0 \implies C_2 = 0.$$

Thus we have:

$$x(t) = -L\cos(\omega t) + L = L(1 - \cos(\omega t)).$$

With this we can solve for some stuff, for example:

$$x(t_{\frac{1}{2}}) = \frac{L}{2} \implies t_{\frac{1}{2}} = \frac{\pi}{3\omega}.$$

$$x(T) = L \implies T = \frac{\pi}{2\omega}.$$

# Index

Abel's Equation, 23 angular frequency, 25

Cauchy-Euler Equation, 21 critical dampening, 27

dampening ratio, 25

equidimensional equations, 21

Green's function, 24

integral transform, 28

kernel, 28

Laplace transform, 28

null function, 29

over damping, 28

Wronskian, 20