


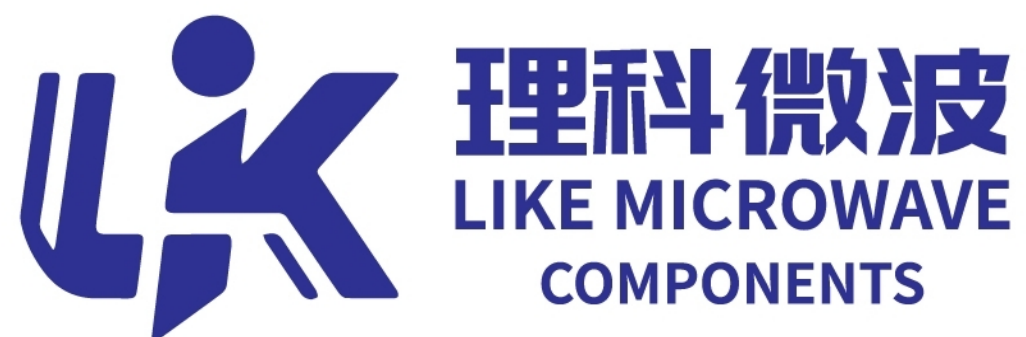

懂设计懂工艺

贵州理科微波科技有限公司 功分器产品手册

贵州理科微波科技有限公司

联系人：孙经理

联系方式：17785663396(微信同号)

邮箱：technology@likemicrowave.com.cn

网址：www.likemicrowave.com




地址：贵州省遵义市汇川区上海路街道上海路新长征尊城
8号楼1203厂房

产品

- ❖ 滤波器
- ❖ 天线
- ❖ 功分器
- ❖ 电桥
- ❖ 封装



工艺

- ❖ PCB
- ❖ LTCC
- ❖ GaAs
- ❖ 薄膜
- ❖ 厚膜

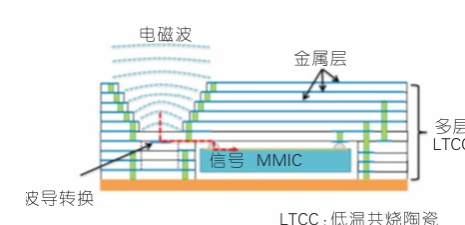

功分器选型指南

提供基于LTCC（低温共烧陶瓷）的功分器系列产品，在性能与可靠性上直接对标Mini-Circuits等国际领先品牌。致力于为高频、高速应用提供小型化、高抑制、低插损的优质选择。

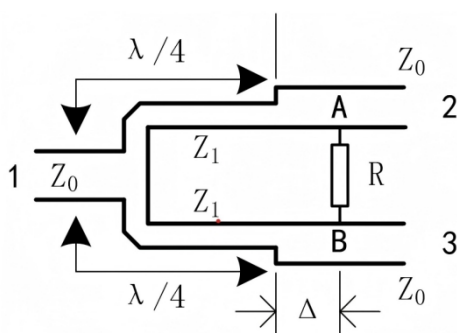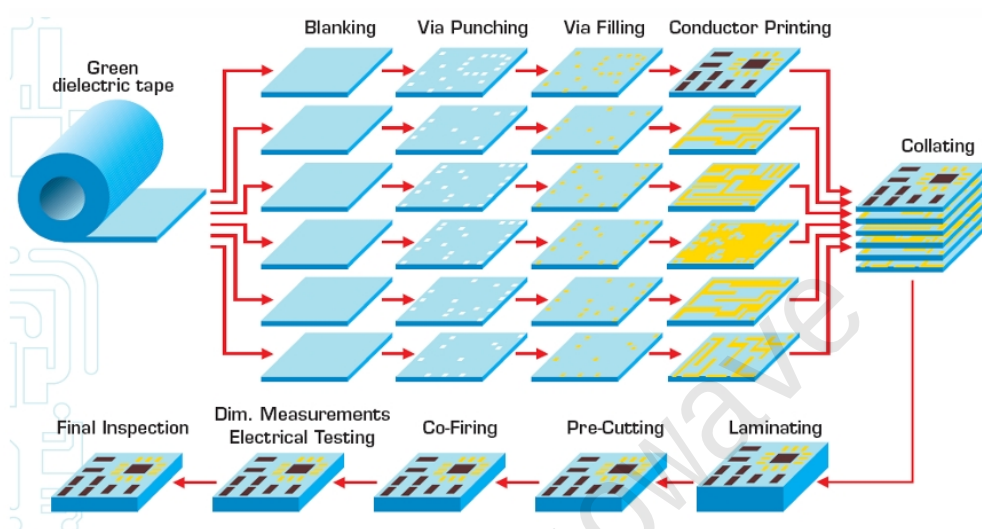

LTCC功分器

序号	型号	频率/MHz	尺寸/mm	对标Mini型号
1	GLPD-900-1200-32-16	900-1200	3.2×1.6	SCN-2-11
2	GLPD-1100-1500-32-16	1100-1500	3.2×1.6	SCN-2-15
3	GLPD-1400-1900-32-16	1400-1900	3.2×1.6	SCN-2-19
4	GLPD-1800-2300-32-16	1800-2300	3.2×1.6	SCN-2-22
5	GLPD-2200-2800-32-16	2200-2800	3.2×1.6	SCN-2-27
6	GLPD-2700-3800-32-16	2700-3800	3.2×1.6	SCN-2-35
7	GLPD-3700-4300-32-16	3700-4300	3.2×1.6	SCN-2-45
8	GLPD-5500-6500-32-16	5500-6500	3.2×1.6	SCN-2-65
9	GLPD-100-3000-80-60	100-3000	8.0×6.0	宽带

命名规则：以GLPD-900-1200-32-16为例。


序号	类别	含义
1	G	公司代号
2	L	LTCC工艺
3	PD	功分器
4	900-1200	通带频率900MHz-1200MHz
5	32-16	3.2mm×1.6mm

GLPD-900-1200-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

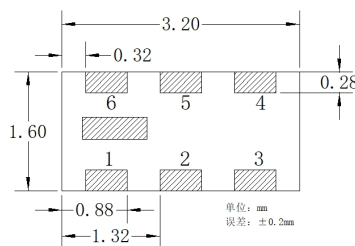


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	900~1200		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	15

3.Electrical Performance Specifications

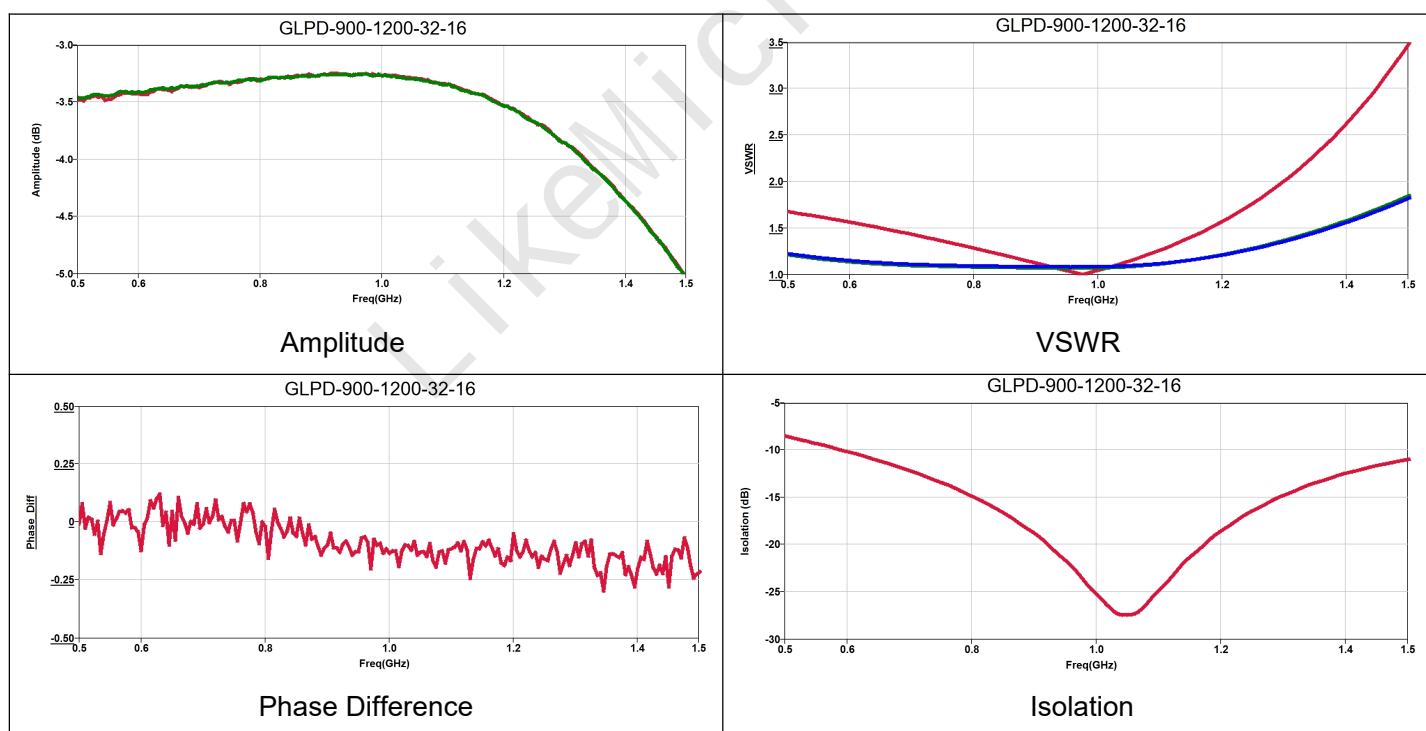


GLPD-1100-1500-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

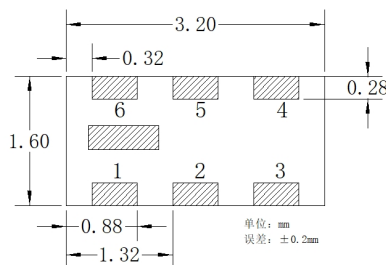


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	1100~1500		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	17

3.Electrical Performance Specifications

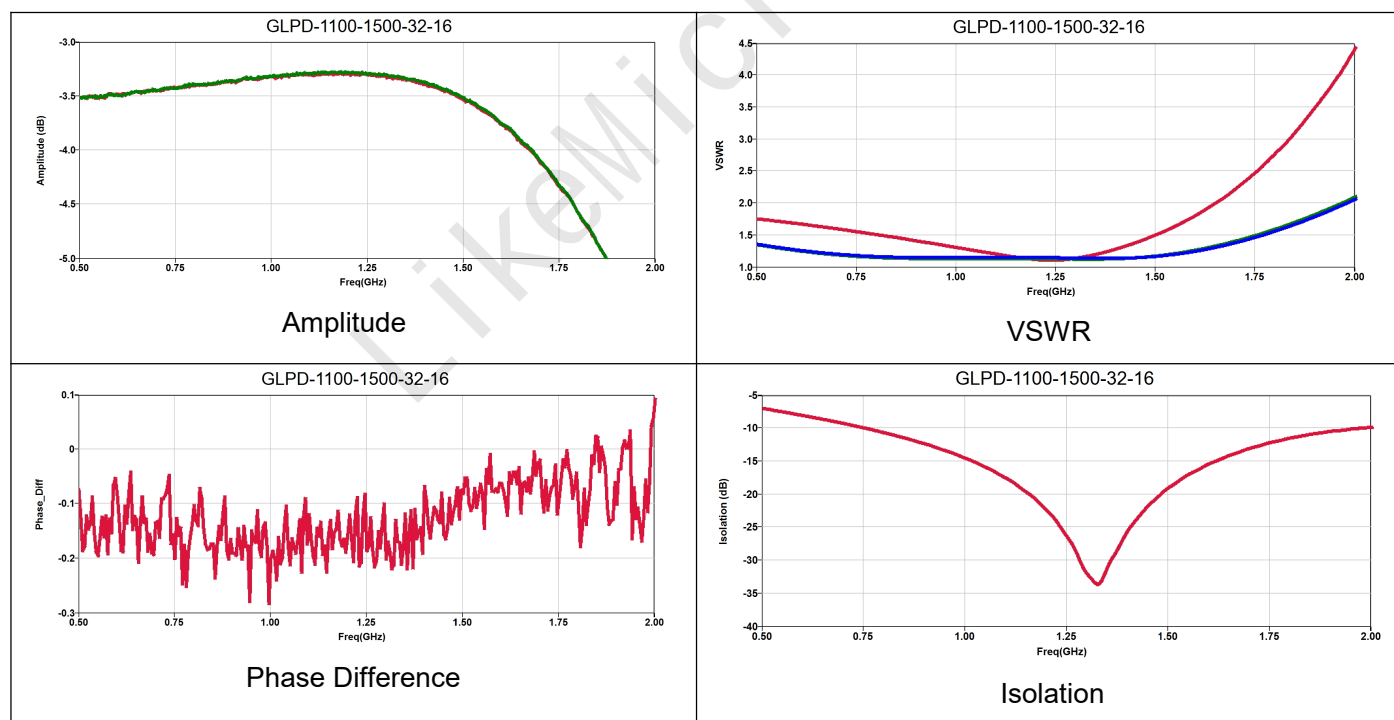


GLPD-1400-1900-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

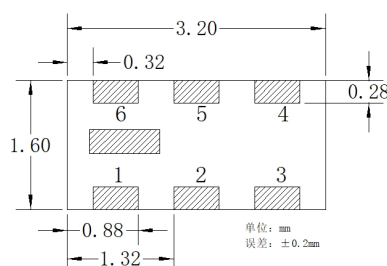


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	1400~1900		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			15	12

3.Electrical Performance Specifications

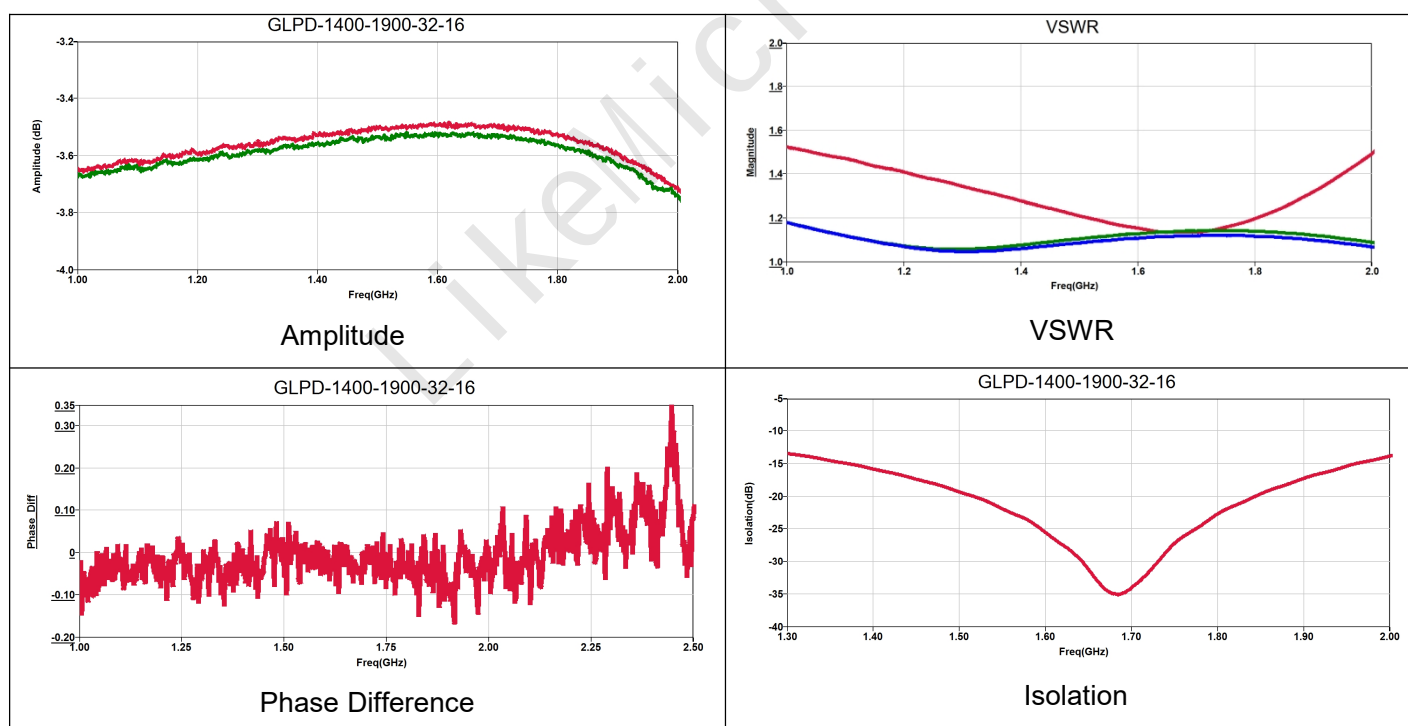


GLPD-1800-2300-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

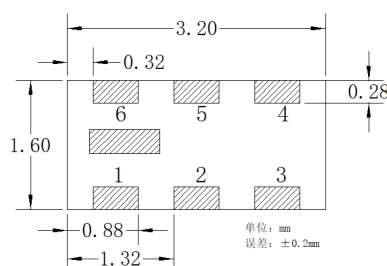


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	1800~2300		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	17

3.Electrical Performance Specifications

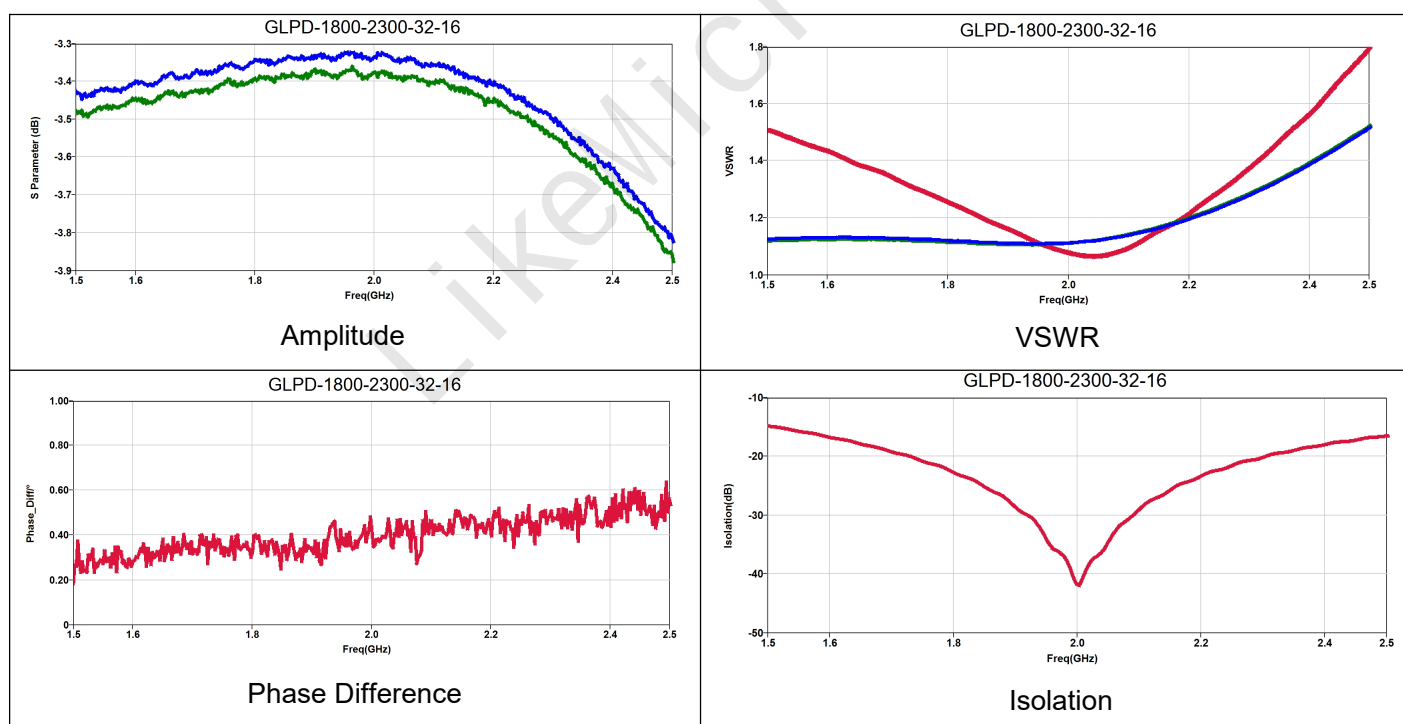


GLPD-2200-2800-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

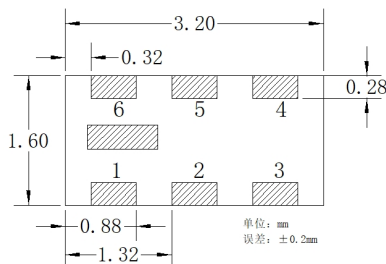


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	2200~2800		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	17

3.Electrical Performance Specifications

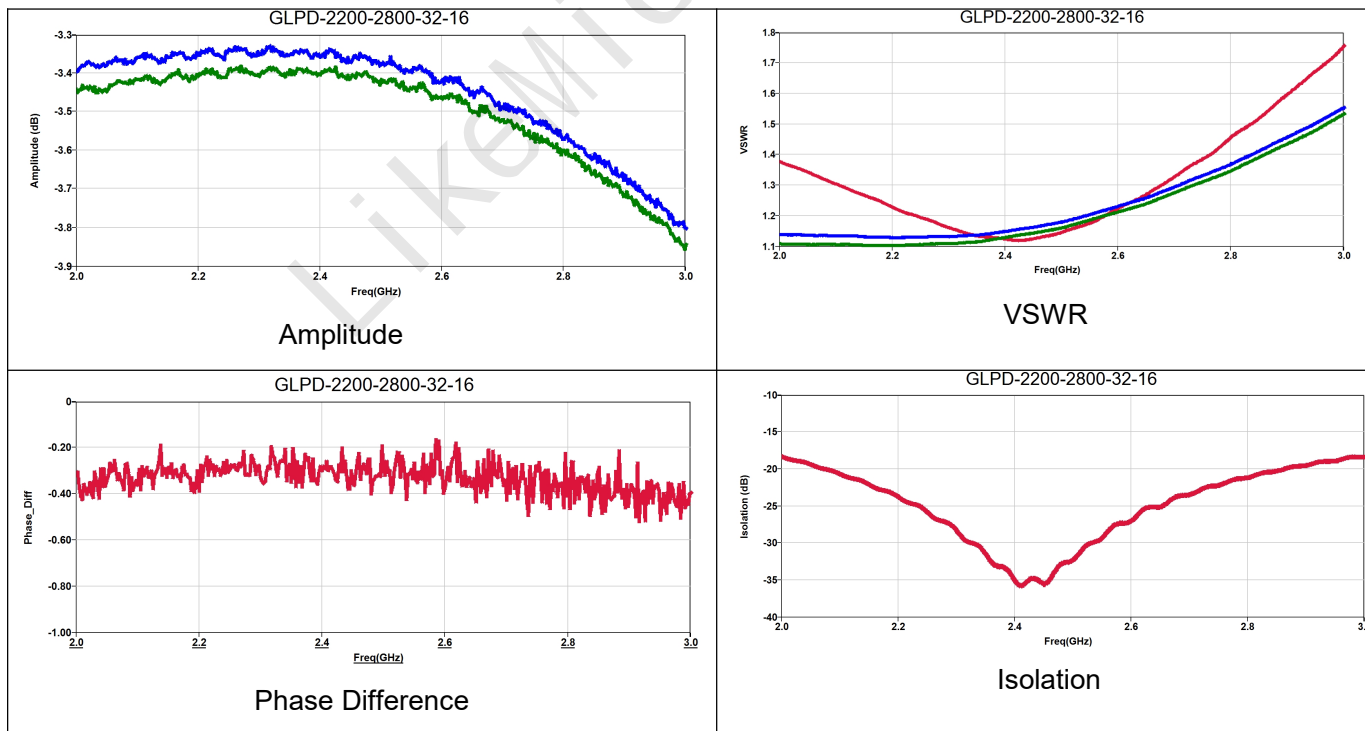


GLPD-2700-3800-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

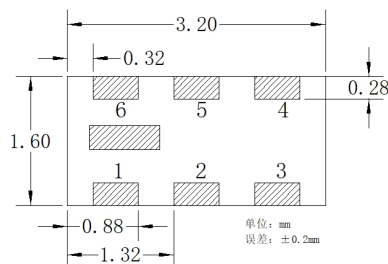


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	2700~3800		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	15

3.Electrical Performance Specifications

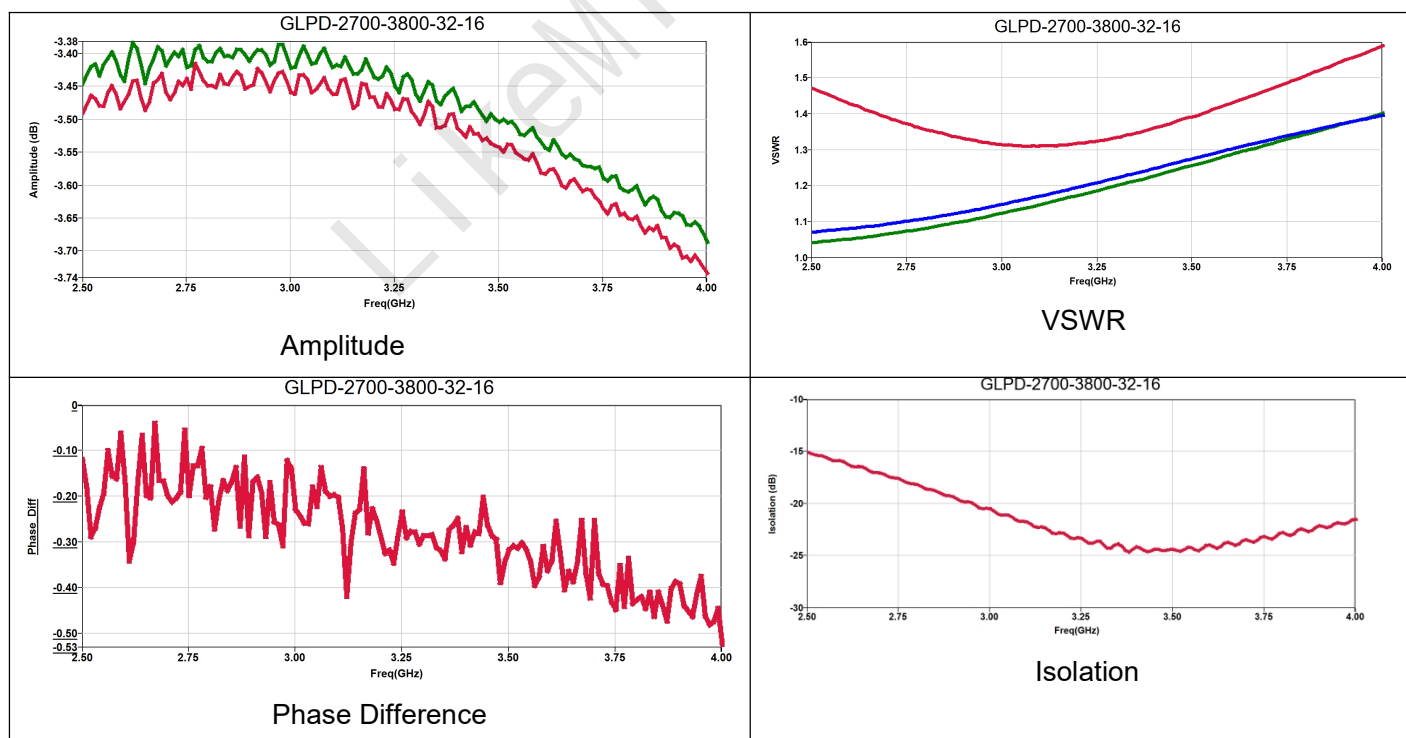


GLPD-3700-4300-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

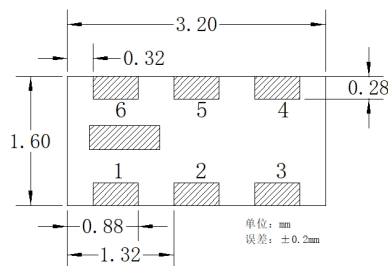


Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm


2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	3700~4300		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	17


3.Electrical Performance Specifications

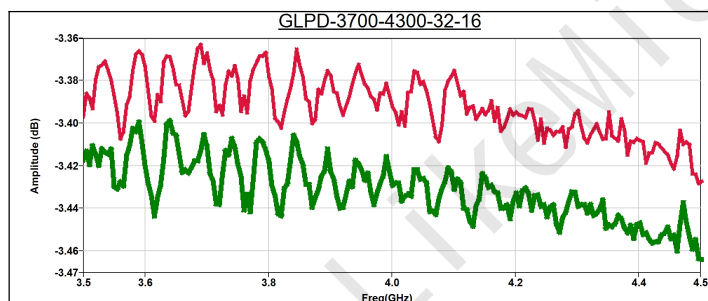


Amplitude

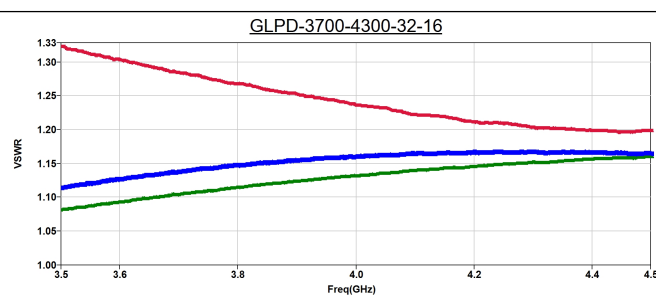

VSWR

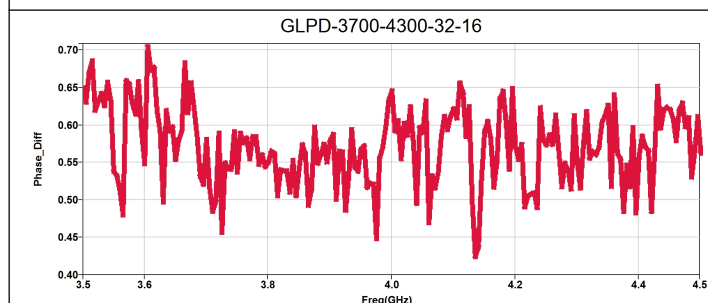

Phase Difference

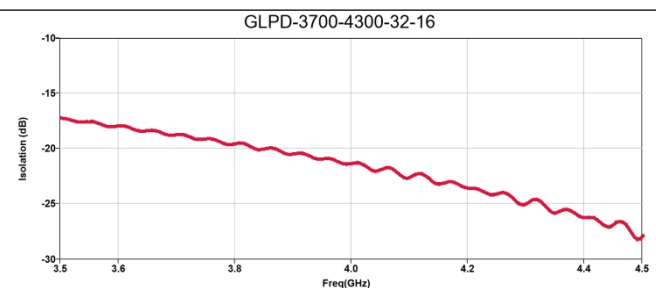


Isolation

GLPD-5500-6500-32-16

LTCC Power Divider

1.Features

- 1206 (3.2×1.6mm) Stand Package
- Continuous wave 2W
- Operating temperature: -55℃ to +125℃

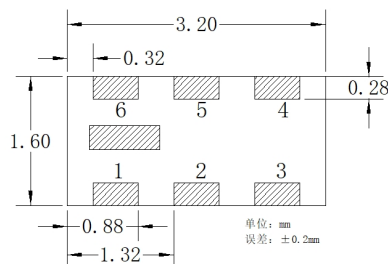

Function	Terminal
Sum Port	2
Port 1	4
Port 2	6
GND	1,3,5
Port 1-2	Resistor 100 Ohm

2.Typical Specifications

Parameter	Frequency (MHz)	SPEC		
		Min.	TYP	Max.
Insertion Loss (dB)	5500~6500		0.6	0.9
VSWR			1.4	1.8
Amplitude Unbalance(dB)			0.2	0.6
Phase Unbalance (Degrees)			1	3
Isolation			20	17

3.Electrical Performance Specifications

