






NOTES. (UNLESS OTHERWISE SPECIFIED)



1. GEOMETRIC DATA FILES PROVIDED BY INC. SHALL BE USED FOR MASTER DATA. A DRAWING OF EQUAL FILENAME AND REVISION TO THE GEOMETRIC DATA SHALL BE USED TO DETERMINE GEOMETRIC CHARACTERISTICS AND TOLERANCES. DRAWING DIMENSIONS ARE SUBORDINATE TO GEOMETRIC DATA UNLESS SPECIFIED ON DRAWING TO BE MASTER, AS MAY BE THE CASE OF CABLE LENGTHS OR TABULATED VARIABLE DIMENSIONS. THE SUPPLIER MUST COMPLY WITH THE STANDARDS PERTAINING TO THE TOLERANCE METHOD APPLIED.
2. GD&T - GEOMETRIC TOLERANCE METHODS IN ACCORDANCE TO ASME Y14.5-2009. DATUM REFERENCE FRAMES RANK AS DATUM A PRIMARY, B SECONDARY AND C TERTIARY. FEATURE CONTROL FRAMES MAY RE-ORDER DATUMS PER THE FEATURES DATUM DEPENDENCE. DIMENSIONS THAT LOCATE GEOMETRIC TOLERANCE CHARACTERISTICS ARE BASIC (EXACT). NO TOLERANCES APPLY TO BASIC DIMENSIONS.
3. DIRECT TOLERANCE DIMENSIONING - INTERPRET DIMENSIONS THAT DO NOT LOCATE GD&T CHARACTERISTICS OR GD&T CONTROLLED FEATURES AS THE DIRECT TOLERANCE DIMENSION SYSTEM. THE LOCAL PLUS/MINUS, LOCAL LIMIT AND TITLE BLOCK TOLERANCES APPLY.
4. IN THE ABSENCE OF DRAWING DIMENSIONS AND DATUMS, THE GEOMETRIC DATA IS BASIC. THE PLANES OF THE ABSOLUTE COORDINATE SYSTEM DENOTE THE DATUM REFERENCE PLANES AS X-Y = DATUM A, Y-Z = B AND X-Z = C. ALL GEOMETRIC DATA SURFACES $\boxed{\text{0.2} \text{A} \text{B} \text{C}}$.
5. PERFECT ORIENTATION AND/OR PERFECT LOCATION AT MMC AS REQUIRED FOR THE INTERRELATIONSHIP OF ALL DATUM FEATURES OF SIZE.
6. ON PARTS SUBJECT TO FREE STATE VARIATION, ALL TOLERANCES APPLY WHEN THE PART IS RESTRAINED ACCORDING TO FUNCTIONAL MATING CONDITIONS AS DEFINED BY THE DATUM REFERENCE FRAME RANK OR FEATURE CONTROL FRAME DATUM RANK PER THE FEATURE INSPECTED. CONSULT PROPER INC. MANUFACTURING QUALITY ENGINEER (MQE) FOR APPROVAL/CLARIFICATION ON INDIVIDUAL PARTS.
7. DIMENSIONS DESIGNATED WITH THE SYMBOL SPC SHALL BE PRODUCED WITH STATISTICAL TOLERANCE PROCESS CONTROLS. IN ORDER TO USE THE TOLERANCE ON A FEATURE, THE STATISTICAL PROCESS (CP, CPK, ETC) OF THE PART MUST BE VALIDATED AND APPROVED BY AN INC. MQE.
8. DIMENSIONS DESIGNATED WITH THE FAI SYMBOL SHALL BE FIRST ARTICLE INSPECTION DIMENSIONS. THREE SAMPLE PARTS MUST BE FULLY INSPECTED. FAI REPORT MUST BE VALIDATED AND APPROVED BY INC. MQE.
9. ALL TOOLING, FIXTURING AND OTHER UNIQUE ITEMS THAT ARE USED TO CREATE THIS PART ARE THE PROPERTY OF INC. AND SHALL BE PERMANENTLY MARKED IN ACCORDANCE WITH DOCUMENT SRAS-2024.
THE DESIGN OF ALL TOOLING OR FIXTURING REQUIRED FOR THE MANUFACTURING OR VERIFICATION OF THE PART SHALL BE APPROVED BY THE APPROPRIATE INC. ENGINEER PRIOR TO TOOL OR FIXTURE FABRICATION.
10. ALL HOMOGENEOUS MATERIALS MUST COMPLY WITH THE FOLLOWING ENVIRONMENTAL SPECIFICATIONS:
 - REGULATED SUBSTANCES SPECIFICATION (RSS) - 069-0135
 - ALL ADHESIVES, COATINGS AND PAINTS, PRINTING INKS, AND CLEANING AGENTS USED IN THE MANUFACTURING OF THIS PART MUST COMPLY WITH THE VOC SPECIFICATION, 099-22549
 - ALL MATERIALS WITH RECYCLED OR RENEWABLE CONTENT MUST COMPLY WITH THE RECYCLED & RENEWABLE MATERIAL SPECIFICATION, 099-15583
11. MAGNETIC MATERIAL: NdFeB N48SH-100RC (REE) - TO BE INC. PD/MQE/MQE/GSM APPROVED MATERIAL SUPPLIER.
MATERIAL PROPERTIES (REPORT PER BLOCK):
 - RESIDUAL MAGNETIC FLUX (Br): 13.7 - 14.2 kGs
 - B-COERCIVITY FORCE (Hcb): 13.20 kOe MIN
 - J-COERCIVITY FORCE (Hcj): 19 kOe MIN
 - MAX ENERGY PRODUCT: 45-49 MGOe
 - BLOCK NdFeB HARDNESS: 600 ± 100 HV
12. MAGNET FINISH: 4.5-9.0 µm CUEN PLATING - FOLLOW INC. CUEN OK2PLATE REQUIREMENTS:
 - CU 2.5-5.0 µm, EN 2.0-4.0 µm
 - EN PHOS CONTENT 9-14% BY WEIGHT
 - NO VISIBLE GRAIN OR MACHINING MARKS AFTER PLATING
 - GLOSS AT 60°: 177.5 ± 87.5 GU
 - ROUGHNESS X: 0.35 ± 0.20 µm Ra
 - ROUGHNESS Y: 0.35 ± 0.20 µm Ra
 - COLOR:
 - L*: 60-75
 - a*: 1.2-2.7
 - b*: 4.5-10
13. NO CRACKS OR CHIPPING AFTER PLATING - CLASS C PER 069-8198 INC. PD/MQE APPROVED COSMETIC LIMITS
14. PART MUST SURVIVE 24HR SALT SPRAY PER ASTM B117-11. MEASURE AND REPORT 32PCS PER BATCH. NO SIGNS OF CORROSION OR PITTING AFTER PLATING.
15. MAGNETS TO BE SHIPPED MAGNETIZED IN INC. PD/AME/MQE APPROVED PACKAGING
16. DIMENSIONS AFTER PLATING, MAGNET SPECIFIC DIMENSIONS BEFORE PLATING LISTED
17. MAGNETIC MOMENT: 3.05 ± 0.24 µWb*cm MEASURE ON LE FLUXMETER WITH HELMHOLTZ COIL OR OTHER INC. PD/MQE APPROVED TEST SETUP
18. PARTS TO SURVIVE 72HR 85 C / 85% RH HEAT SOAK (080-1654-K) AND 65 C / 90% RH TO -20 C / UNC TEMPERATURE HUMIDITY CYCLING (080-1656-H) WITH LESS THAN 5.0% DECREASE IN MAGNETIC MOMENT. MEASURE AND REPORT 10 PCS PER BATCH USING INC. PD/MQE TEST SETUP.
19. MEASURE SURFACE ENERGY USING DYNE PEN ON INDICATED SURFACE. ACCEPTABLE SURFACE CONDITION TO BE 32mN/m OR HIGHER USING CONTINUOUS LINE ACROSS PART. DYNE: #32 MIN AT 00C, #30 MIN AT DOWNSTREAM 10C.
20. FOLLOW INC. MAGNET ERS 080-02981
21. DIMENSIONS LABELED AS REQUIRE 100% INSPECTION PER INC. PD AND MQE APPROVED METHOD.



SECTION A-A

SECTION B-B

SECTION C-C

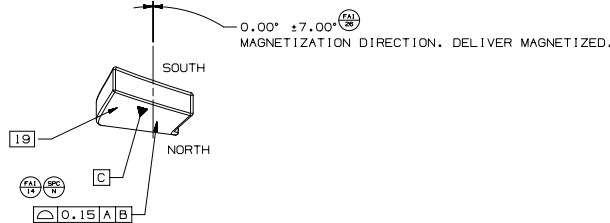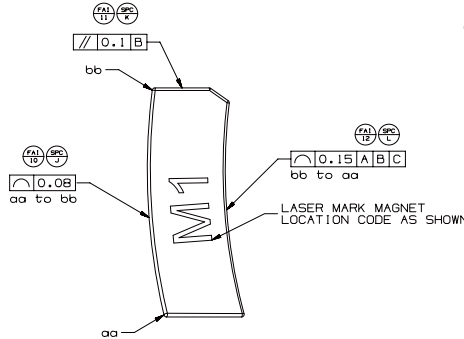

DRAWER	PD	DATE	07/08/25	NOTICE OF PROPRIETARY PROPERTY		
DESIGNER	PD	DATE	07/08/25	THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF (INC). THE PROPRIETOR AGREES TO THE FOLLOWING: (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE (2) NOT TO REPRODUCE OR COPY IT (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART (4) ALL RIGHTS RESERVED		
DIMENSIONS ARE IN MILLIMETERS				TITLE		
TOLERANCES				MAGNET, RADIAL, MI MAGNETIZED, TE, B747		
X.X ±0.2				DRAWING NUMBER		
X.XX ±0.10				160-05689		
X.XXX ±0.050				REV.		
ANGLES ±0.5°				A		
DO NOT SCALE DRAWINGS				SCALE		
THIRD ANGLE PROJECTION				NONE		
SIZE				SHT 1 OF 1		
D						