
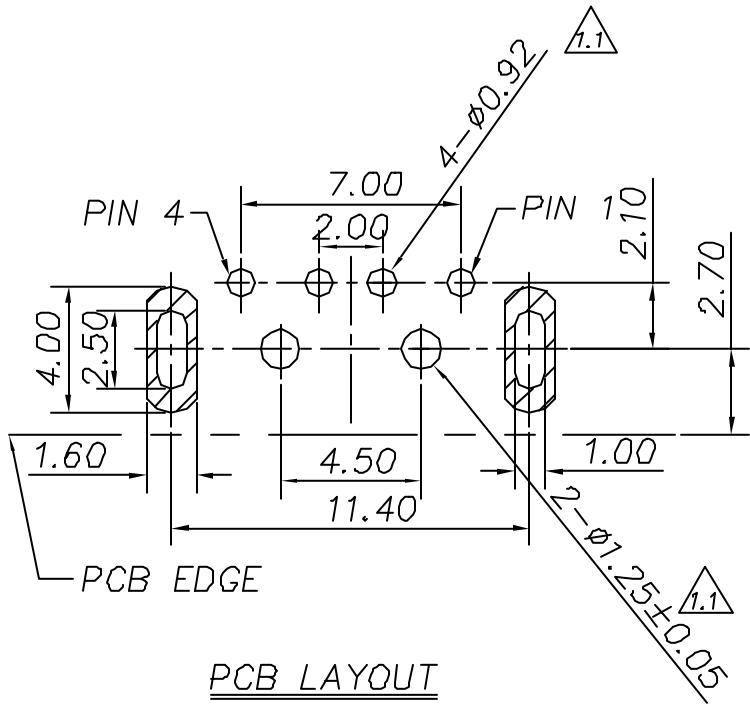
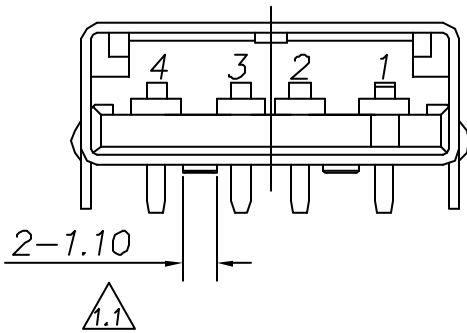
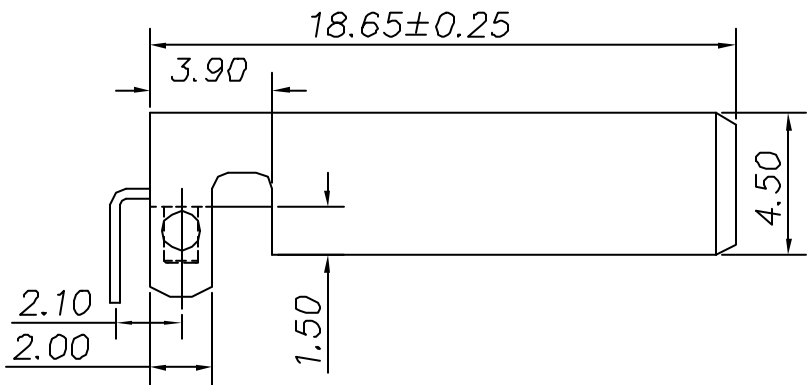
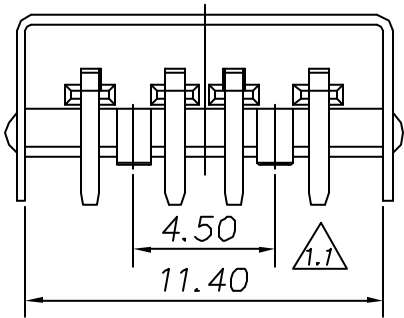


CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	09/10/02'		
1.1	R-0194	Frank/Sep,22,03'		

Notes:

- 1) Material
- Shell : Steel
- Contacts : Copper Alloy
- Insulator : PBT,G.F UL94-V0
- 2) Environmental
- 55°C~+105°C
- 3) Electrical
- Current Rating : 1.0 Amp
- Dielectric Strength : 500Vac for 1 minute
- Insulation Resistance : 500MΩ min. at 500VDC
- 4) Finish
- Refer to Order Information

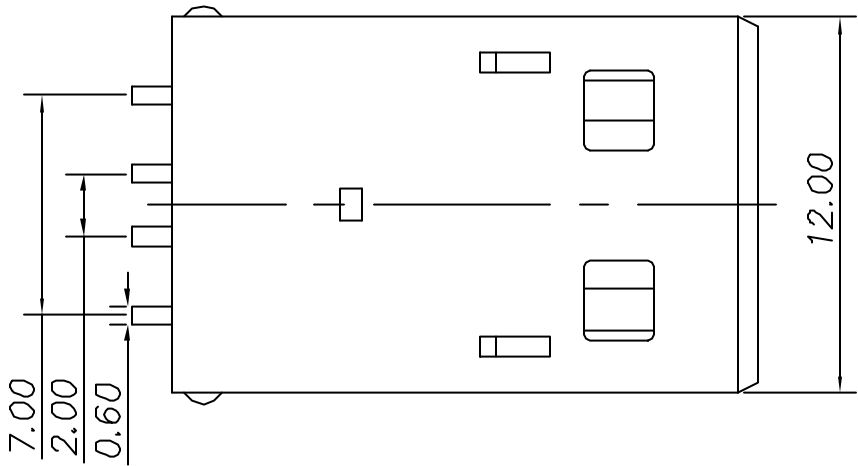

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X ±0.25	.X' ±1.0°	Frank	Sep,22,03'		
.XX ±0.15	.XX' ±0.5°	Design	Date		
.XXX ±0.05	.XXX' ±0.2°	Frank	Sep,22,03'	Item	
SHEET 1/1		CHK	Date	USB CONNECTOR	
FINISH See Notes				STD A/Male PCB END RIGHT ANGLE DIP	
Scale N/A	Unit: mm	APPR	Date	Dwg. No. A0207	SIZE A3
				Part No. USB-4MARSXXXX	REV 1.1