

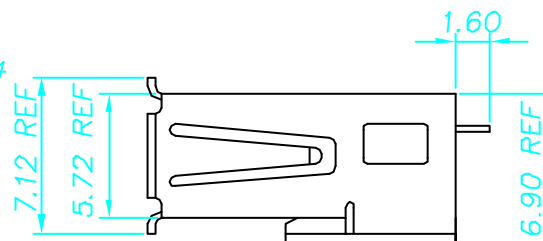


CUSTOMER COPY

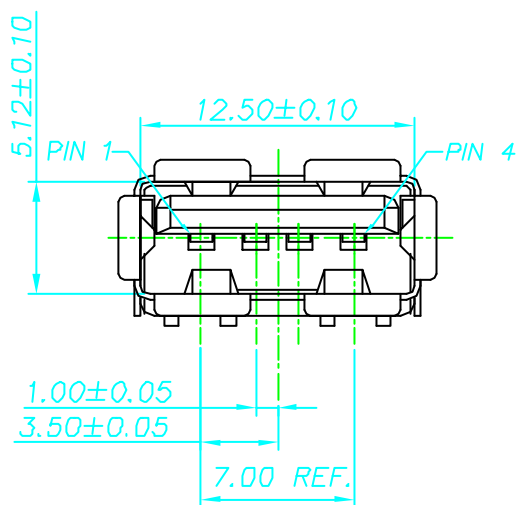

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Original Design			
1.1	Change Order Information	Gery-Huong 29/SEP/01		
1.2	Add Notes And Remove Order Information	Fred 17/SEP/02		

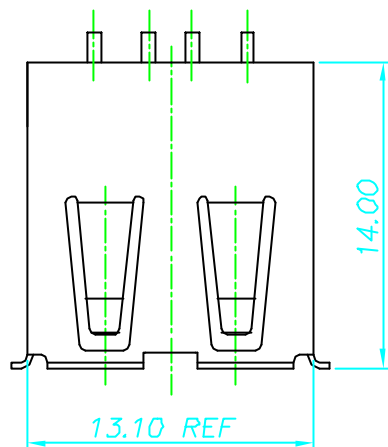

NOTES:

1.0. MATERIAL:

1.1. HOUSING: PBT G.F. UL 94V-0

1.2. CONTACT: COPPER ALLOY

1.3. SHELL: STEEL

2.0. RATING:

2.1. VOLTAGE: 30VAC(R.M.S.)

2.2. CURRENT: 1.0 AMPERE MIN.


2.3. TEMPERATURE: -55°C TO +105°C

3.0. ELECTRIC CHARACTERISTIC:

3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.

3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.

3.3. DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC

General Tolerance		Angle Tolerance		Dwg		Date		<div>COMOSS[®]</div> <div>COMOSS ELECTRONIC CO., LTD.</div> <div>4F., No. 11, Chung-Hsin St., Shu-Lin 226, Taipei, Taiwan R.O.C.</div>	
.X	±0.15	.X°	±1.0°	James	20/Apr/00°	Design	Date		
.XX	±0.10	.XX°	±0.5°	James	20/Apr/00°	CHK	Date	Item	USB CONNECTOR
.XXX	±0.05	.XXX°	±0.2°						USB A FEMALE PANEL TYPE
SHEET: 1/1				FINISH SEE ORDER INFORMATION				Dwg. No.	A0018
Scale 4:1		Unit: mm		APPR		Date		Part No.	USB-4FAPSxxxx
								SIZE	A3
								REV	1.2