

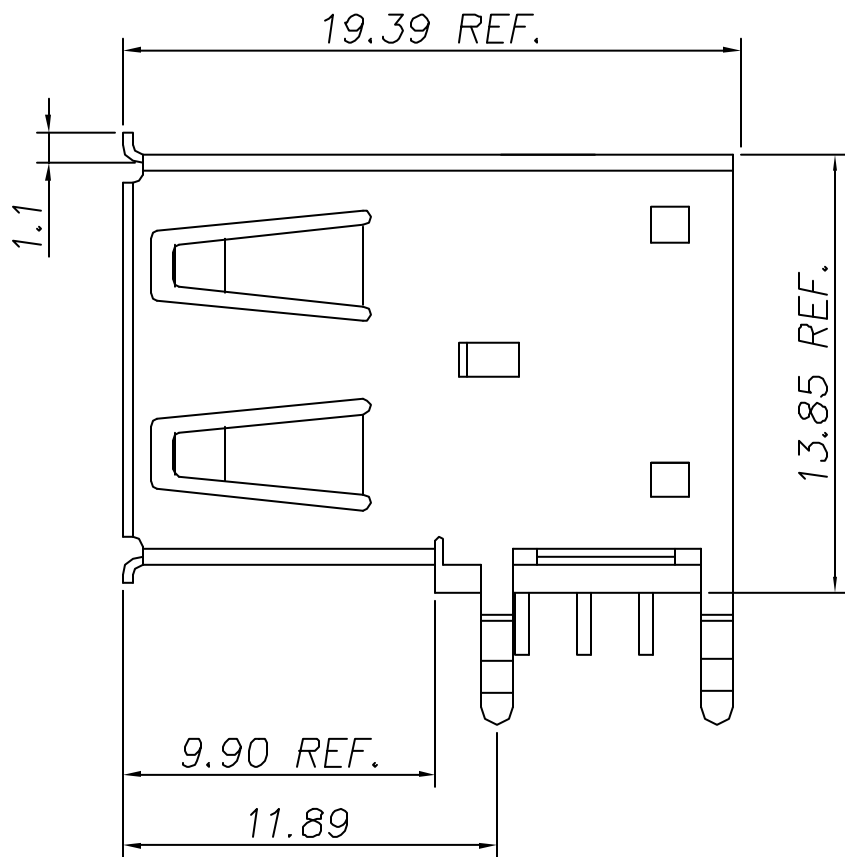
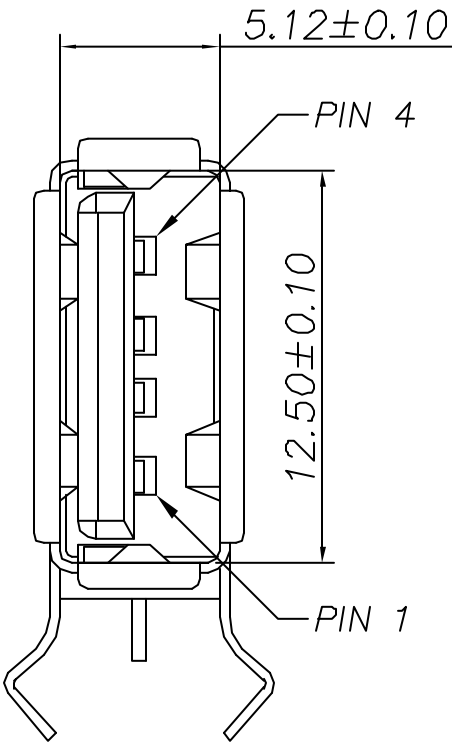


CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Original Design			
1.1	Change Order Information	Gary-Huang 25/SEP/01		
1.2	Add Notes And Remove Order Information	Fred 17/SEP/02		

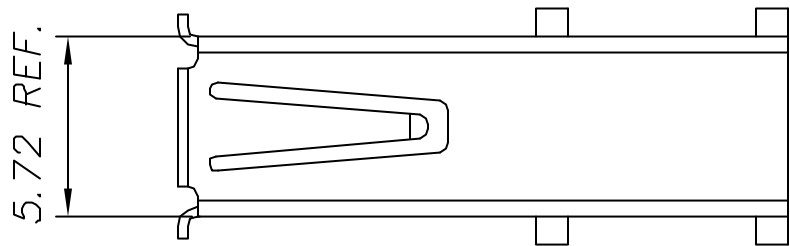

- 1.2 NOTES:
- 1.0. MATERIAL:
 - 1.1. HOUSING: PBT G.F. UL 94V-0
 - 1.2. CONTACT: COPPER ALLOY
 - 1.3. SHELL: STEEL
 - 2.0. RATING:
 - 2.1. VOLTAGE: 30VAC(R.M.S.)
 - 2.2. CURRENT: 1.0 AMPERE MIN.
 - 2.3. TEMPERATURE: -55°C TO +105°C
 - 3.0. ELECTRIC CHARACTERISTIC:
 - 3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - 3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
 - 3.3. DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC

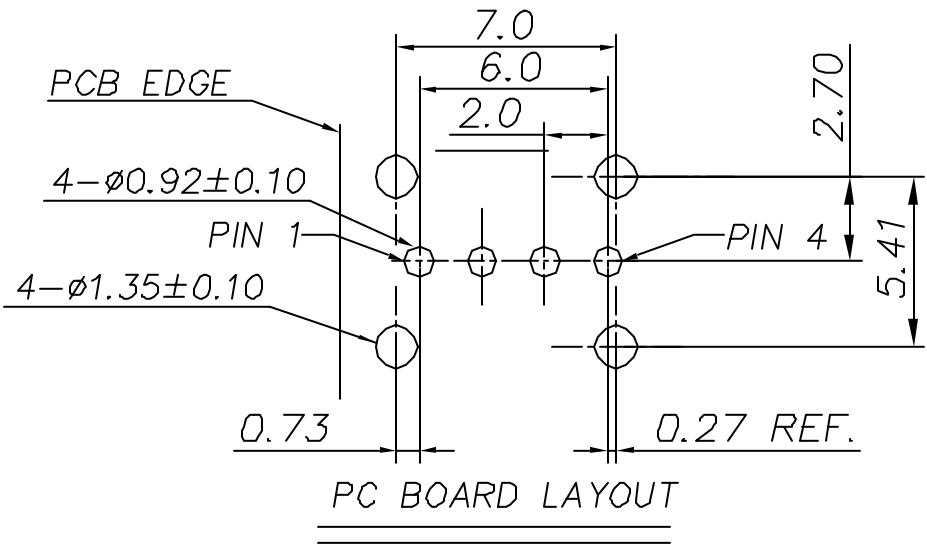

General Tolerance		Angle Tolerance		Dwg Date		<div>COMOSS®</div> <div>COMOSS ELECTRONIC CO., LTD.</div> <div>4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.</div> <div>Item USB CONNECTOR</div> <div>USB A FEMALE UPPER RIGHT TYPE</div>	
.X	±0.15	.X°	±1.0°	Kelly	29/Mar/00'		
.XX	±0.10	.XX°	±0.5°	Design	Date		
.XXX	±0.05	.XXX°	±0.2°	Kelly	29/Mar/00'	CHK Date	
SHEET: 1/1		FINISH SEE ORDER INFORMATION		APPR Date		Dwg. No. A0015	
Scale 4:1		Unit: mm				Part No. USB-4FATSxxxx	
						SIZE A3	
						REV 1.2	