

CUSTOMER COPY

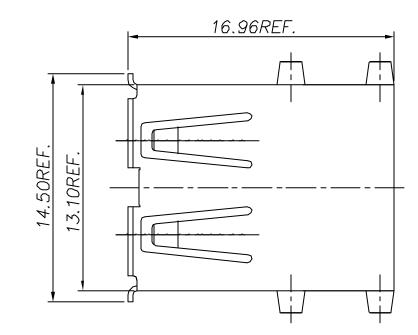

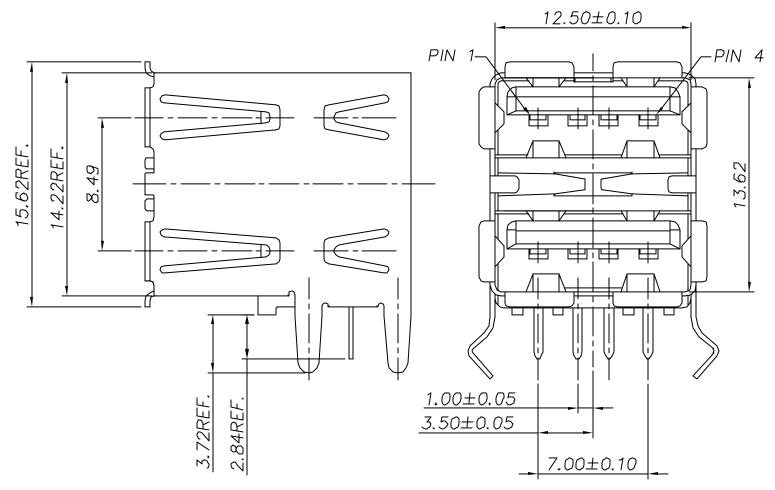

| REV. | DESCRIPTION | BY/DATE | CHECK/DATE | APPROVED/DATE |
|------|---|----------------------|------------|---------------|
| 1.0 | Original Design | | | |
| 1.7 | Change Order Informatiom | Gary—Huang 25/SEP/01 | | |
| 1.2 | Add Notes And Remove Order Information | Fred 17/SEP/02' | | |
| 1.3 | R-0194 | Ducky Sep,25,03' | | |
| | | | | |

Notes:

1.3

1) Material

Shell : Steel

Contacts : Copper Alloy

Insulator: Thermoplastic, G.F UL94-VO

2) Environmental

-55°C~+105°C


3) Electrical

Current Rating: 1.0 Amp

Dielectric Strength : 750Vac for 1 minute Insulation Resistance : $500\text{M}\Omega$ min. at 500VDC

4) Finish

Refer to Order Information

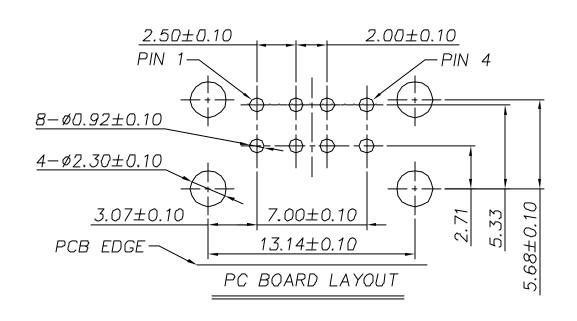

| General Tolerance .X ±0.25 | | Dwg Ducky | Date Sep, 25, 03' | COMOSS © COMOSS ELECTRONIC CO., LTD. |
|----------------------------|-----------------|---------------------|-----------------------------|--|
| .XX ±0.15 .XXX ±0.05 | .XXX* ±0.5* | Design | Date Sep, 25, 03' | 4F., No. 11, Chung-Hain St., ShuLin 238, Taipei, Taiwen R.O.C. |
| SHEET: 1/1 | 20.2 | <i>С</i> НК | <u> </u> | Item USB CONNECTOR |
| FINISH See | Notes | | | USB A FEMALE PCB END RIGHT ANGLE DIP |
| Scale N/A | Unit: mm | APPR | Date | Dwg. No. A0002 SIZE A3 |
| | * | | | Part No. USB-4FARDXXXX |