


CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	08/21/02'		

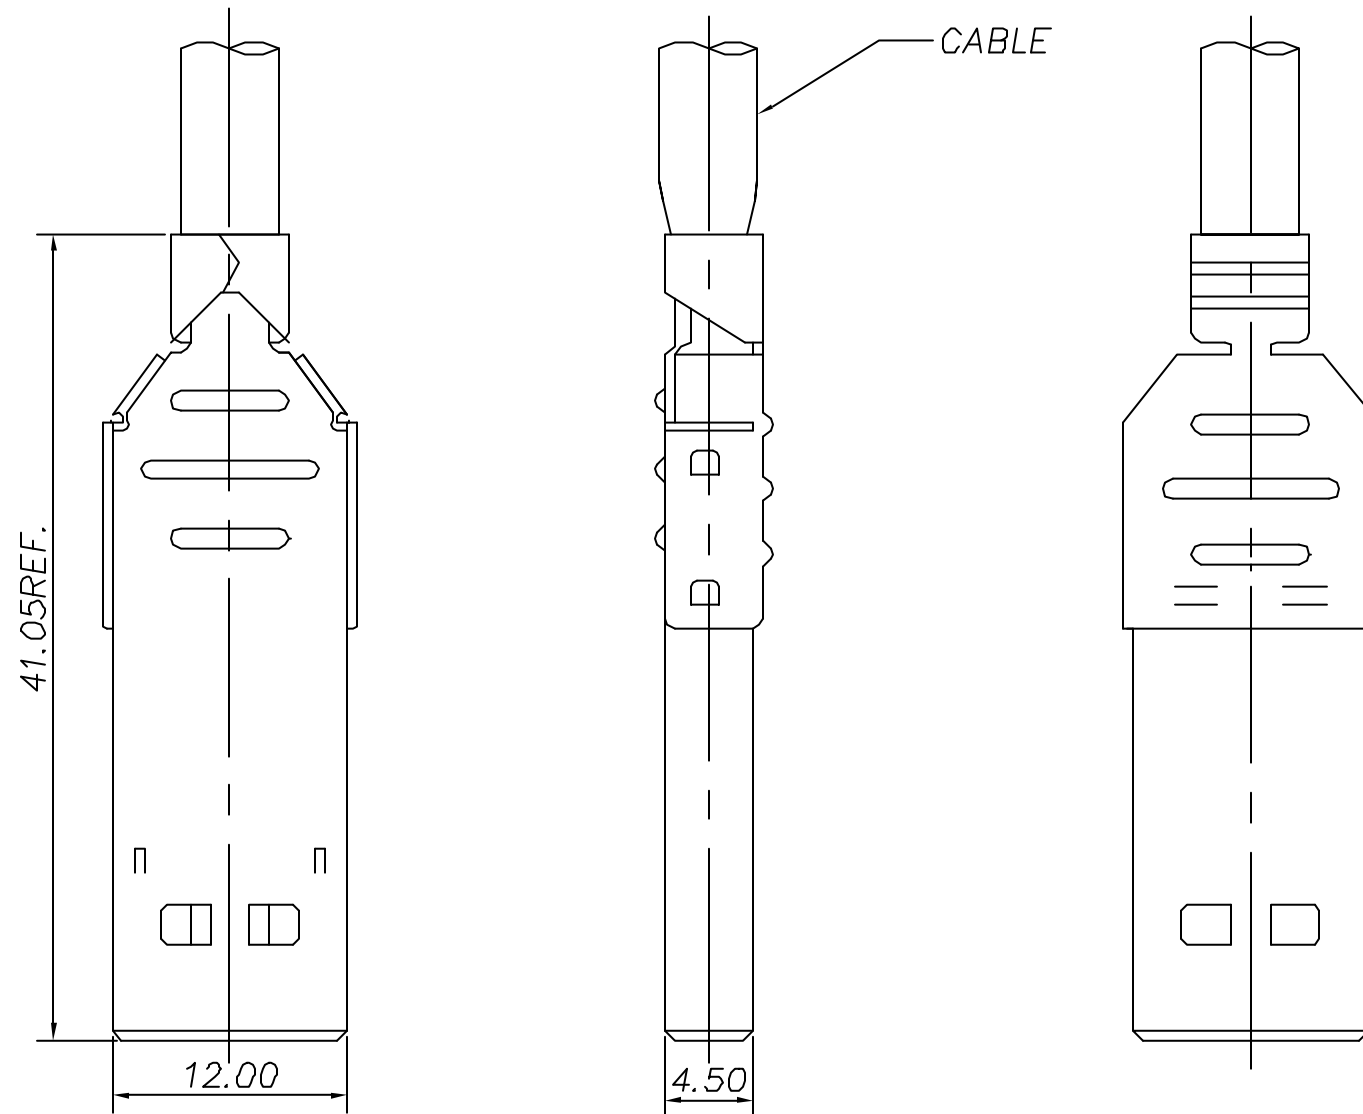

NOTES:

1.0. MATERIAL:

1.1. HOUSING: PBT G.F. UL 94V-0

1.2. CONTACT: COPPER ALLOY

1.3. SHELL: STEEL

2.0. RATING:

2.1. VOLTAGE: 30VAC(R.M.S.)

2.2. CURRENT: 1.0 AMPERE MIN.


2.3. TEMPERATURE: -55°C TO +105°C

3.0. ELECTRIC CHARACTERISTIC:

3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.

3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.

3.3. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC




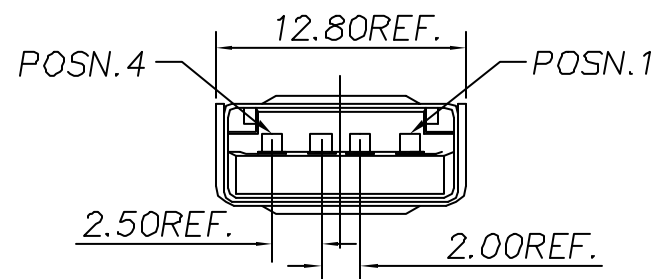


General Tolerance		Angle Tolerance		Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X	±0.15	.X°	±1.0°	Bing	08/21/02'	Item USB CONNECTOR USB A/MALE LONG SHELL CABLE END CRIMPING TYPE	
.XX	±0.10	.XX°	±0.5°	Design	Date		
.XXX	±0.05	.XXX°	±0.2°	Bing	08/21/02'		
SHEET 1/2				CHK	Date		
FINISH SEE ORDER INFORMATION				William	08/21/02'		
Scale N/A		Unit: mm		APPR	Date	Dwg. No. A0295	SIZE A3
						Part No. USB-4MAESXXXX	REV 1.0

CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	08/21/02'		

ASSEMBLY PROCESS:

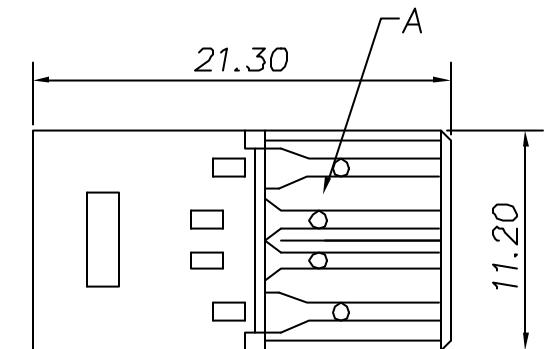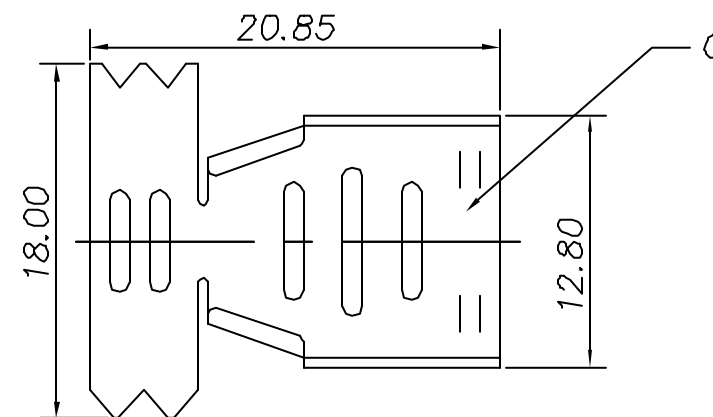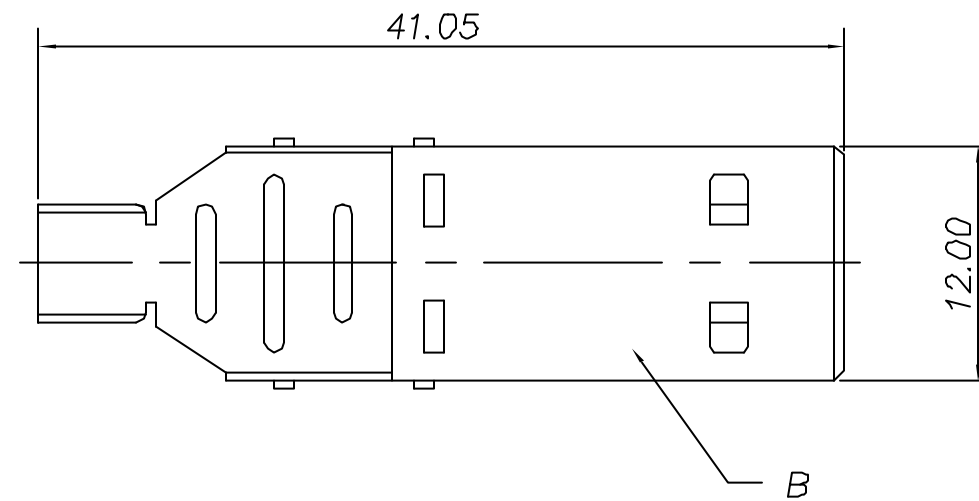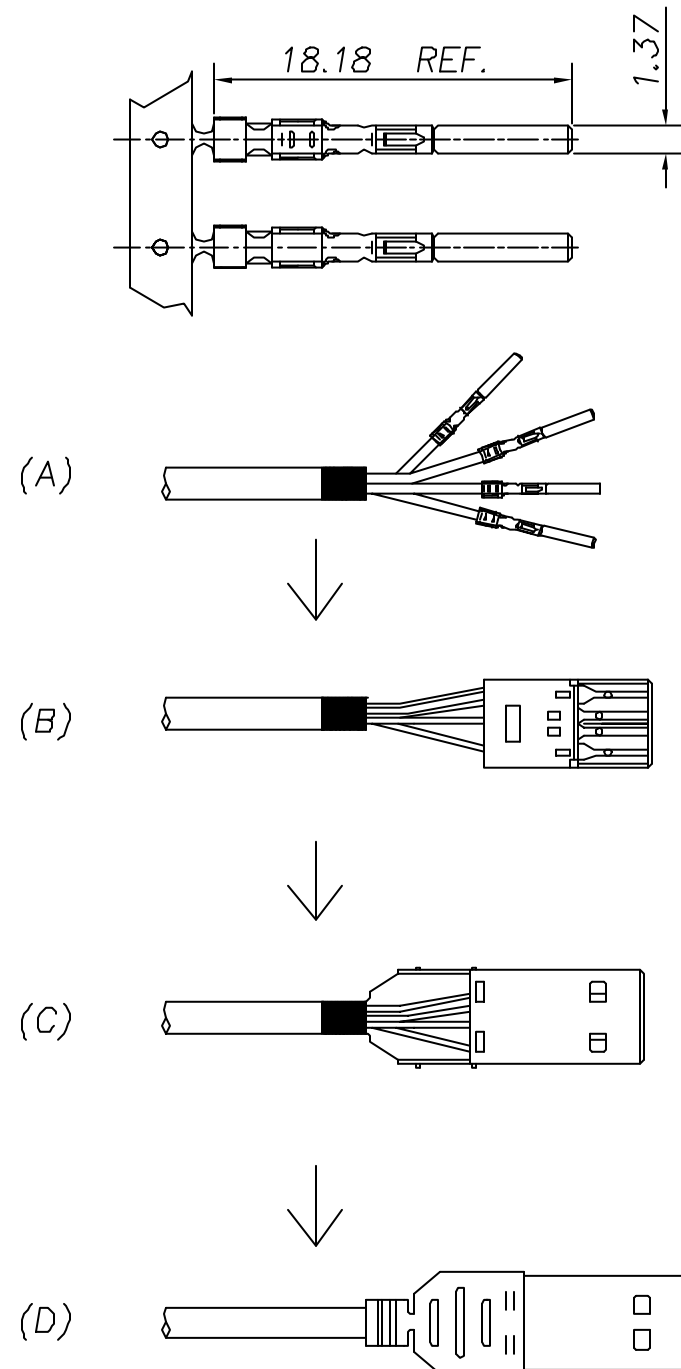

C	BACK SHELL	STELL	USB-4MAESXXXX
B	FRONT SHELL	STEEL	
A	HOUSING	THERMOPLASTIC	
ITEM	DESCRIPTION	MATERIAL	P/N

General Tolerance		Angle Tolerance		Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X	±0.15	.X°	±1.0°	Bing	08/21/02'		
.XX	±0.10	.XX°	±0.5°	Design	Date	Item USB CONNECTOR USB A/MALE LONG SHELL CABLE END CRIMPING TYPE	
.XXX	±0.05	.XXX°	±0.2°	Bing	08/21/02'		
SHEET 2/2				CHK	Date	Dwg. No. A0295 Part No. USB-4MAESXXXX	
FINISH SEE ORDER INFORMATION				William	08/21/02'		
Scale	N/A	Unit:	mm	APPR	Date	SIZE A3 REV 1.0	
		