
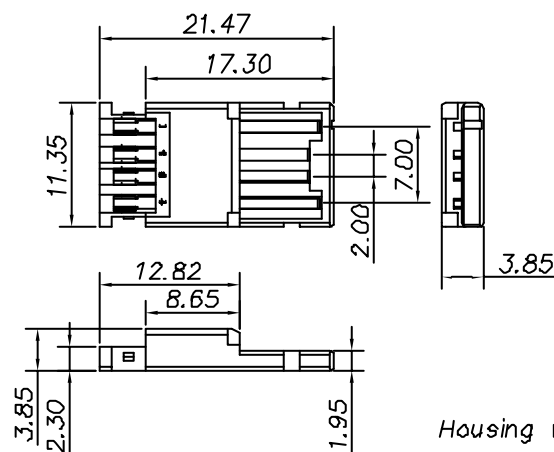

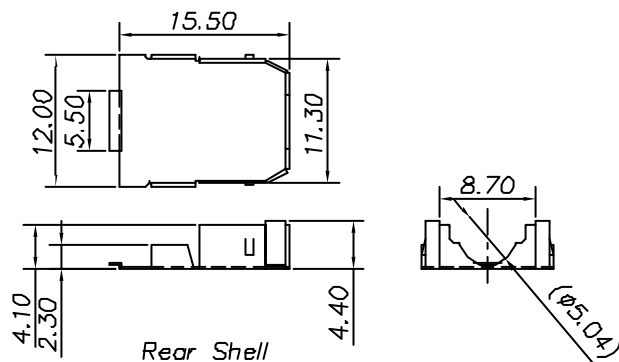
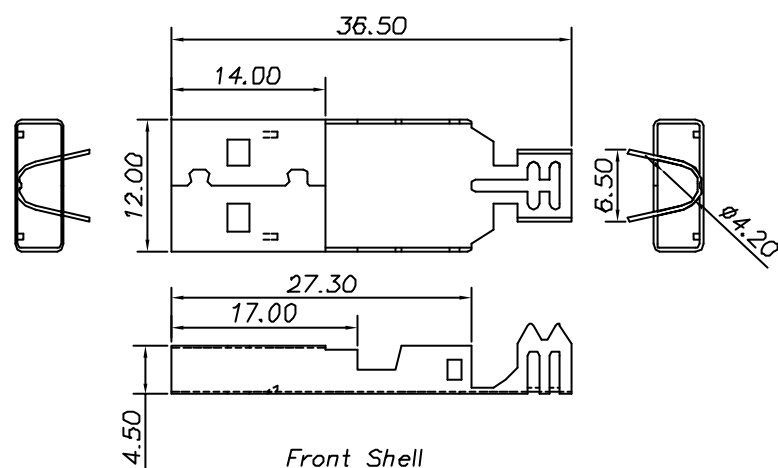


CUSTOMER COPY

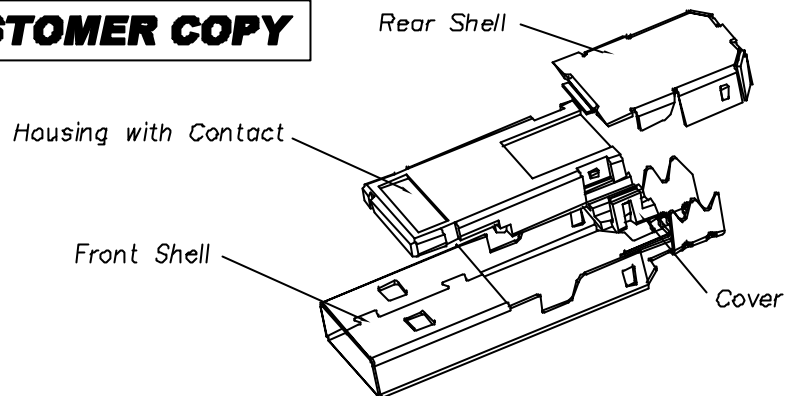

RoHS

Notes:

- 1) Material :
Front Shell : Steel
Rear Shell : Steel
Housing : Thermoplastics, UL94V-0
Contacts : Copper Alloy
Cover : Thermoplastics, UL94V-0
- 2) Environmental
-55°C~+105°C
- 3) Electrical
Voltage : 30 VAC(R.M.S.)
Current Rating : 1.0 Amp min
Dielectric Withstanding Voltage : 750 VAC
Contact Resistance : 30 Milliohms max
- 4) Plating and Insulator color:
Please refer to order information

General Tolerance		Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., Sec. 2, Taipei, Taiwan R.O.C.	
.X	±0.20	.X°	Jerry Jun,02,05'			
.XX	±0.15	.XX°	Design	Date	Item USB CONNECTOR USB A MALE CABLE END SOLDERING TYPE	
.XXX	±0.05	.XXX°	Frank Jun,02,05'			
SHEET 1/1			CHK	Date	Dwg. No. A02151 Part No. USB-4MASSXXX(IV)	
FINISH See Notes						
Scale 2:1	Unit: mm		APPR	Date	REV A3 1.0	

Drawing is subject to change without notice. Any updated information required, please contact with our sales dept.