
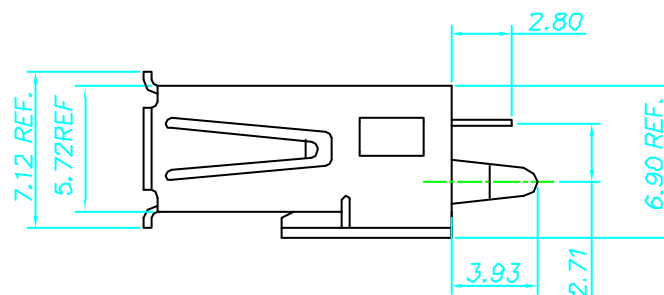
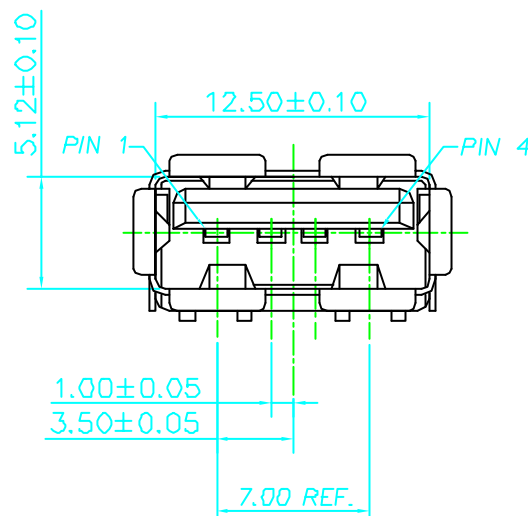


CUSTOMER COPY

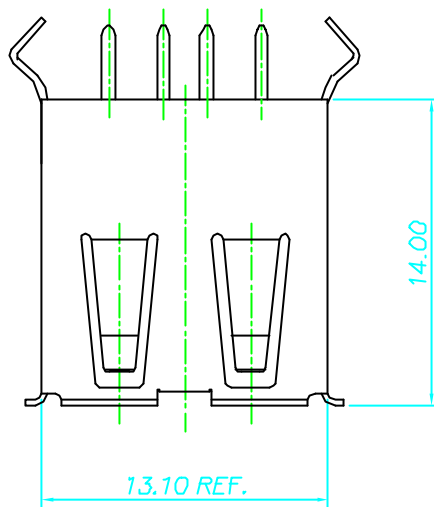

NOTES:

1.0. MATERIAL:

1.1. HOUSING: PBT G.F. UL 94V-0

1.2. CONTACT: COPPER ALLOY

1.3. SHELL: STEEL

2.0. RATING:

2.1. VOLTAGE: 30VAC(R.M.S.)

2.2. CURRENT: 1.0 AMPERE MIN.


2.3. TEMPERATURE: -55°C TO +105°C

3.0. ELECTRIC CHARACTERISTIC:

3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.

3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.

3.3. DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC

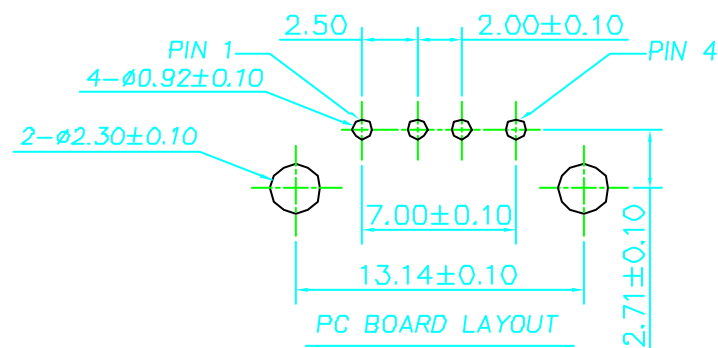

General Tolerance	Angle Tolerance	Dwg	Date	COMOSS[®] COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., Sec. 2, Taipei, Taiwan R.O.C.	
.X ±0.15	.X° ±1.0°	James	20/Apr/00°		
.XX ±0.10	.XX° ±0.5°	Design	Date	Item USB CONNECTOR	
.XXX ±0.05	.XXX° ±0.2°	James	20/Apr/00°		
SHEET: 1/1		CHK	Date	USB A FEMALE PCB END TOP-ENTRY DIP	
FINISH SEE ORDER INFORMATION					
Scale 4:1	Unit: mm	APPR	Date	Dwg. No. A0004	SIZE A3
				Part No. USB-4FAV5xxxx	REV 1.2