
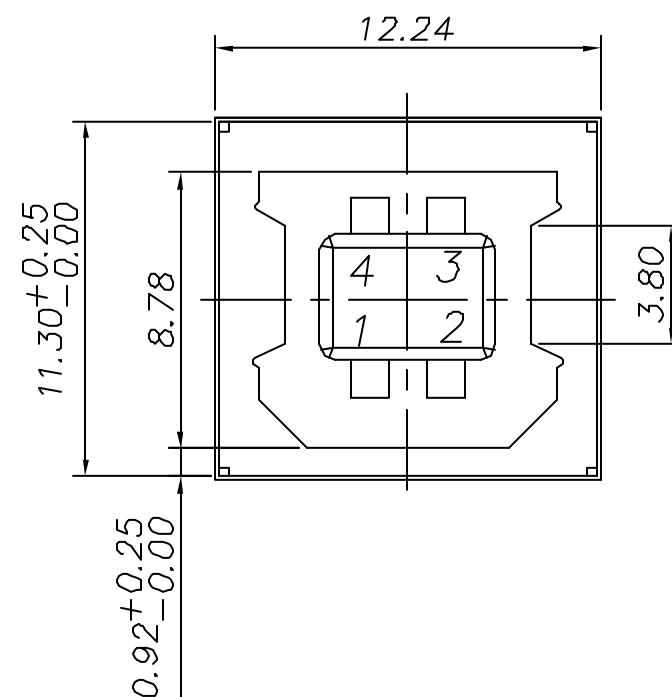
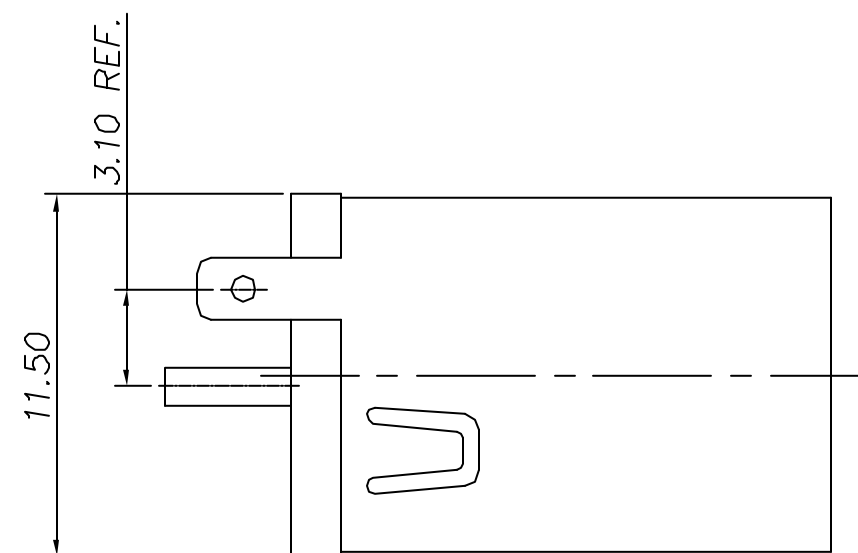


CUSTOMER COPY

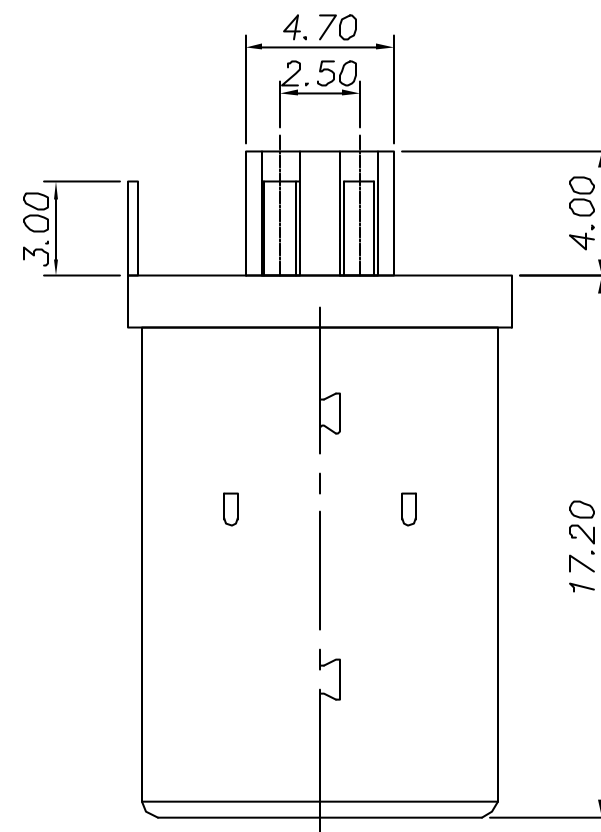

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	08/19/02'		

NOTES:

- 1.0. MATERIAL:
 - 1.1. HOUSING: PBT G.F. UL 94V-0
 - 1.2. CONTACT: COPPER ALLOY
 - 1.3. SHELL: STEEL
- 2.0. RATING:
 - 2.1. VOLTAGE: 30VAC(R.M.S.)
 - 2.2. CURRENT: 1.0 AMPERE MIN.
 - 2.3. TEMPERATURE: -55°C TO +105°C
- 3.0. ELECTRIC CHARACTERISTIC:
 - 3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - 3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
 - 3.3. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC

General Tolerance		Angle Tolerance		Dwg	Date	CONTOUR ® CONTOUR ELECTRONIC CO., LTD.	
.X	±0.15	.X°	±1.0°	David	08/19/02'		
.XX	±0.10	.XX°	±0.5°	Design	Date	Item USB CONNECTOR USB B/FEMALE SOLDER TYPE	
.XXX	±0.05	.XXX°	±0.2°	Samdy	08/19/02'		
SHEET 1/1				CHK	Date	Dwg. No. A0274 Part No. USB-4FBSSXXXX	
FINISH SEE ORDER INFORMATION				William	08/19/02'		
Scale 4:1		Unit: mm		APPR	Date	SIZE A3 REV 1.0	