
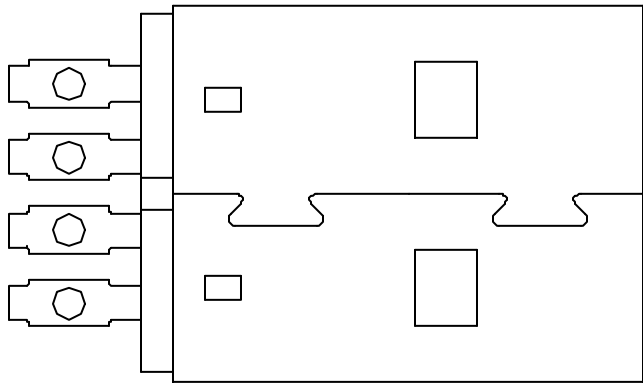
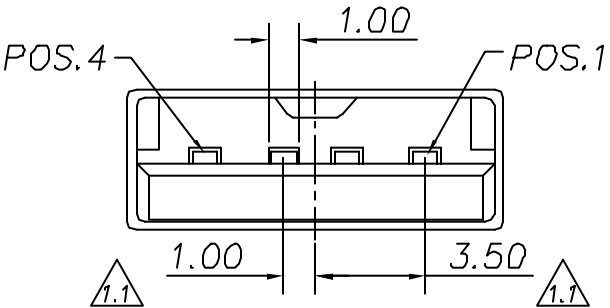
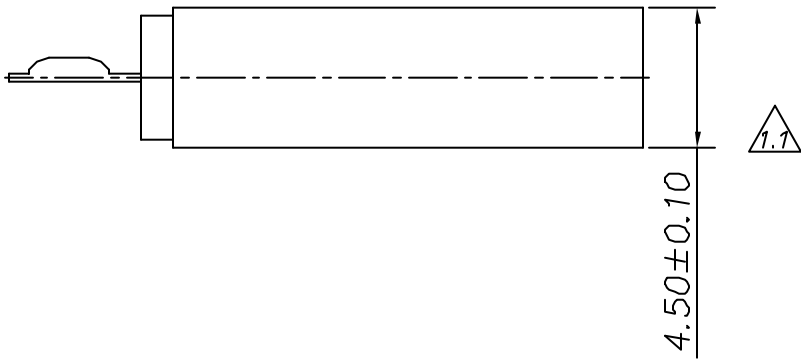


CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	09/23/02'		
1.1	R-Q194	Frank/Sep,22,03'		

- Notes:
- 1) Material  
Shell : Steel  
Contacts : Copper Alloy  
Insulator : PBT,G.F UL94-V0
  - 2) Environmental  
-55℃~+105℃
  - 3) Electrical  
Current Rating : 1.0 Amp  
Dielectric Strength : 500Vac for 1 minute  
Insulation Resistance : 500MΩ min. at 500VDC
  - 4) Finish  
Refer to Order Information

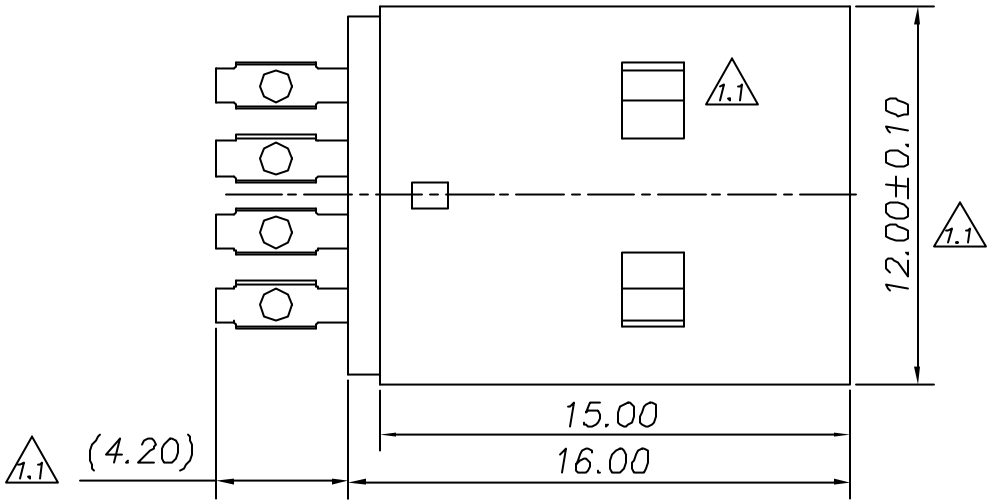

General Tolerance	Angle Tolerance	Dwg	Date	<b>COMOSS®</b> COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X ±0.20	.X° ±1.0°	Frank	Sep,22,03'		
.XX ±0.15	.XX° ±0.5°	Design	Date		
.XXX ±0.05	.XXX° ±0.2°	Frank	Sep,22,03'		
SHEET 1/1		CHK	Date	Item USB CONNECTOR USB A/MALE CABLE END SHORT BODY SOLDERING TYPE	
FINISH See Notes					
Scale N/A	Unit: mm	APPR	Date	Dwg. No. A0308	SIZE A3
				Part No. USB-4MANSXXXX	REV 1.1