
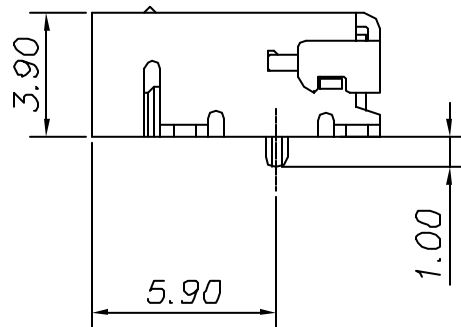
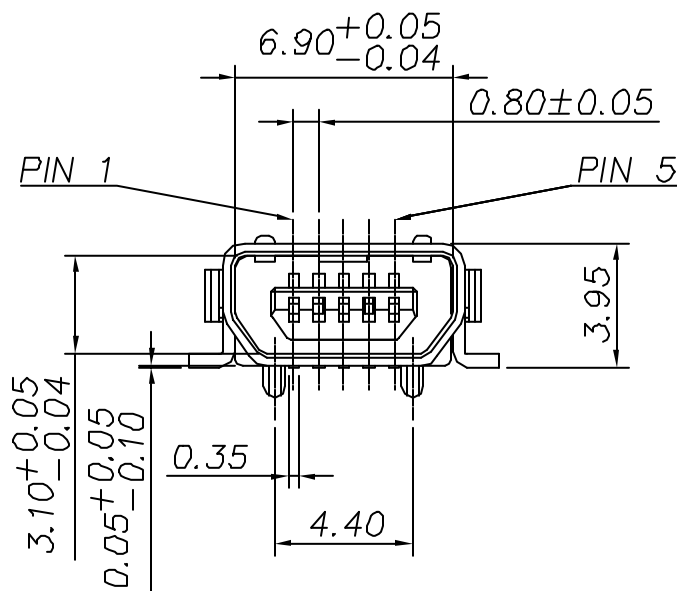



CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Ori.	3/Jul/01'		
1.1	Add Notes And Remove Order Information	09/17/02'		
1.2	Change Part No.	09/20/02'		

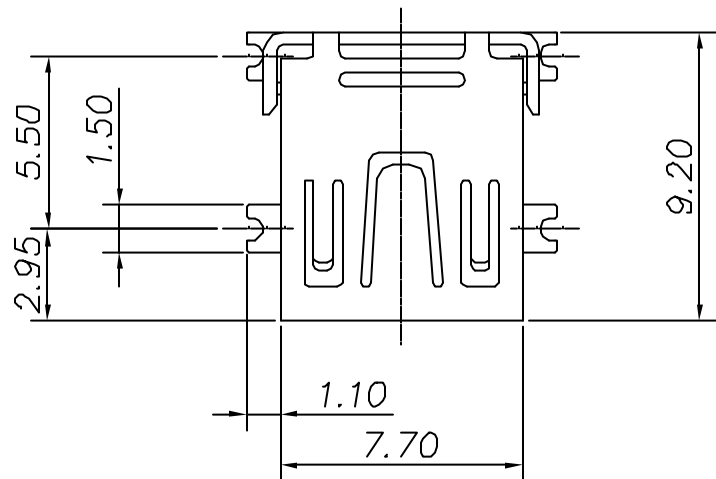


NOTES:

- 1.0. MATERIAL:
 - 1.1. HOUSING: PBT G.F. UL 94V-0
 - 1.2. CONTACT: COPPER ALLOY
 - 1.3. SHELL: STEEL
- 2.0. RATING:
 - 2.1. VOLTAGE: 30VAC(R.M.S.)
 - 2.2. CURRENT: 1.0 AMPERE MIN.
 - 2.3. TEMPERATURE: -55°C TO +105°C
- 3.0. ELECTRIC CHARACTERISTIC:
 - 3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - 3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
 - 3.3. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC

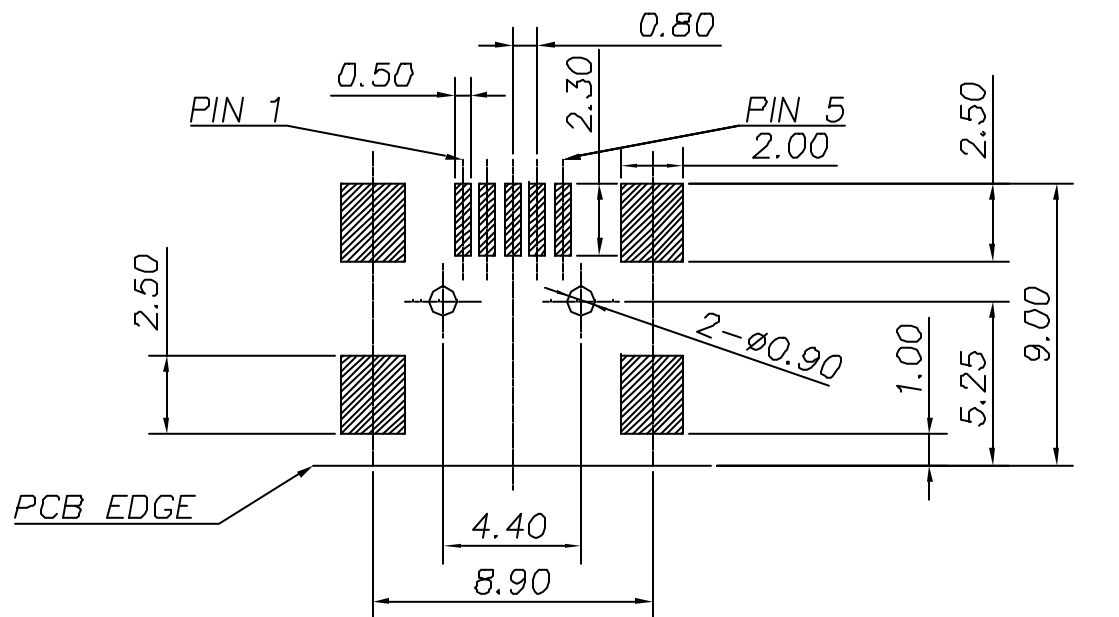

PC BOARD LAYOUT

General Tolerance		Angle Tolerance	Dwg	Date	COMOSS® COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X	±0.15	.X° ±1.0°	Gary-Huang 03/Jul/01'		Item USB CONNECTOR USB 5PIN FEMALE MINI AB PCB END RIGHT ANGLE SMT	
.XX	±0.10	.XX° ±0.5°	Design	Date		
.XXX	±0.05	.XXX° ±0.2°	Gary-Huang 03/Jul/01'			
SHEET: 1/1			CHK	Date		
FINISH SEE ORDER INFORMATION						
Scale 4:1	Unit: mm	APPR	Date		Dwg. No. A0134	SIZE A3
					Part No. USB-5FEMSXXXG ^{1.2}	REV 1.2