

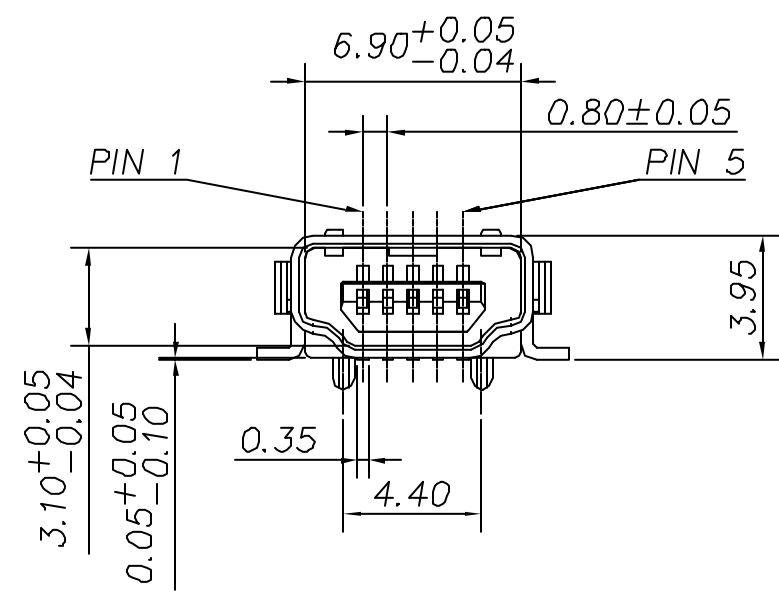
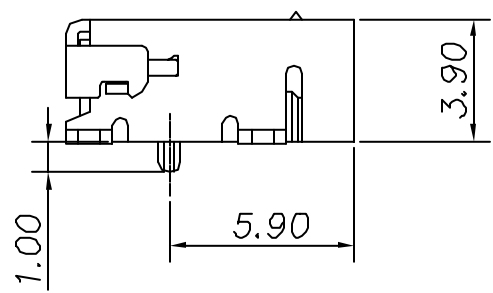


CUSTOMER COPY

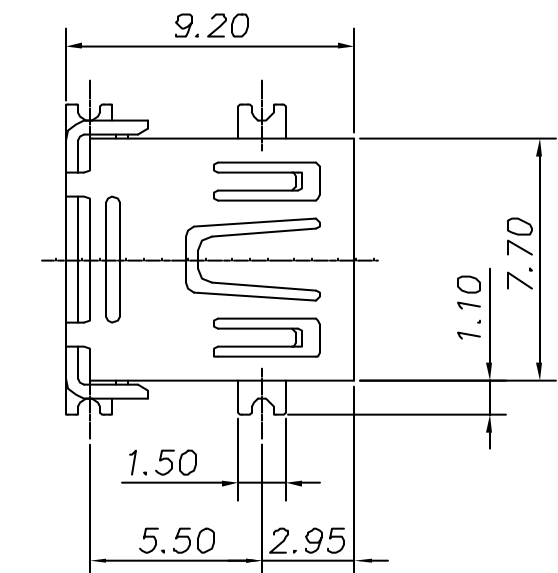

- NOTES:
- 1.0. MATERIAL:
    - 1.1. HOUSING: PBT G.F. UL 94V-0
    - 1.2. CONTACT: COPPER ALLOY
    - 1.3. SHELL: STEEL
  - 2.0. RATING:
    - 2.1. VOLTAGE: 30VAC(R.M.S.)
    - 2.2. CURRENT: 1.0 AMPERE MIN.
    - 2.3. TEMPERATURE: -55°C TO +105°C
  - 3.0. ELECTRIC CHARACTERISTIC:
    - 3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
    - 3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
    - 3.3. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC

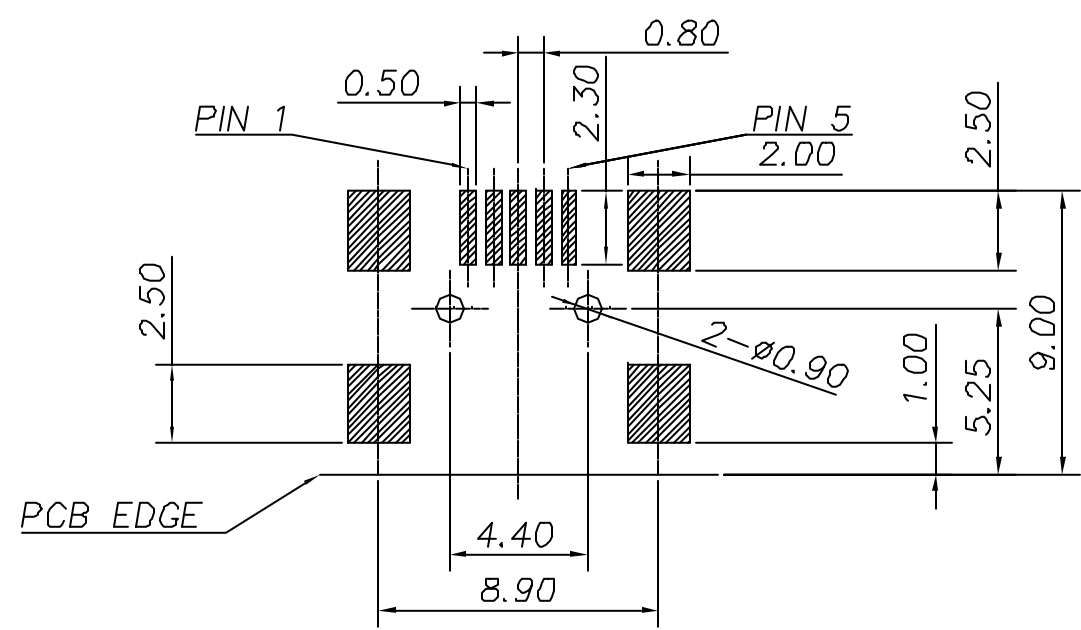

PC BOARD LAYOUT

<b>General Tolerance</b>		<b>Angle Tolerance</b>		<b>Dwg</b>	<b>Date</b>	<b>COMOSS®</b> <b>COMOSS ELECTRONIC CO., LTD.</b> 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X	±0.15	.X°	±1.0°	Gary-Huang	03/Jul/01'	<b>Item</b> USB CONNECTOR  USB 5PIN FEMALE MINI A PCB END RIGHT ANGLE SMT	
.XX	±0.10	.XX°	±0.5°	<b>Design</b>	<b>Date</b>		
.XXX	±0.05	.XXX°	±0.2°	Gary-Huang	03/Jul/01'		
<b>SHEET:</b> 1/1				<b>CHK</b>	<b>Date</b>	<b>Dwg. No.</b> A0133 <b>SIZE</b> A3 <b>Part No.</b> USB-5FDMSXXXW 1.2 <b>REV</b> 1.2	
<b>FINISH</b> SEE ORDER INFORMATION							
<b>Scale</b> 4:1	<b>Unit:</b> mm		<b>APPR</b>	<b>Date</b>			
		