



CUSTOMER COPY

REV.	DESCRIPTION	BY/DATE	CHECK/DATE	APPROVED/DATE
1.0	Qri.	08/23/02'		

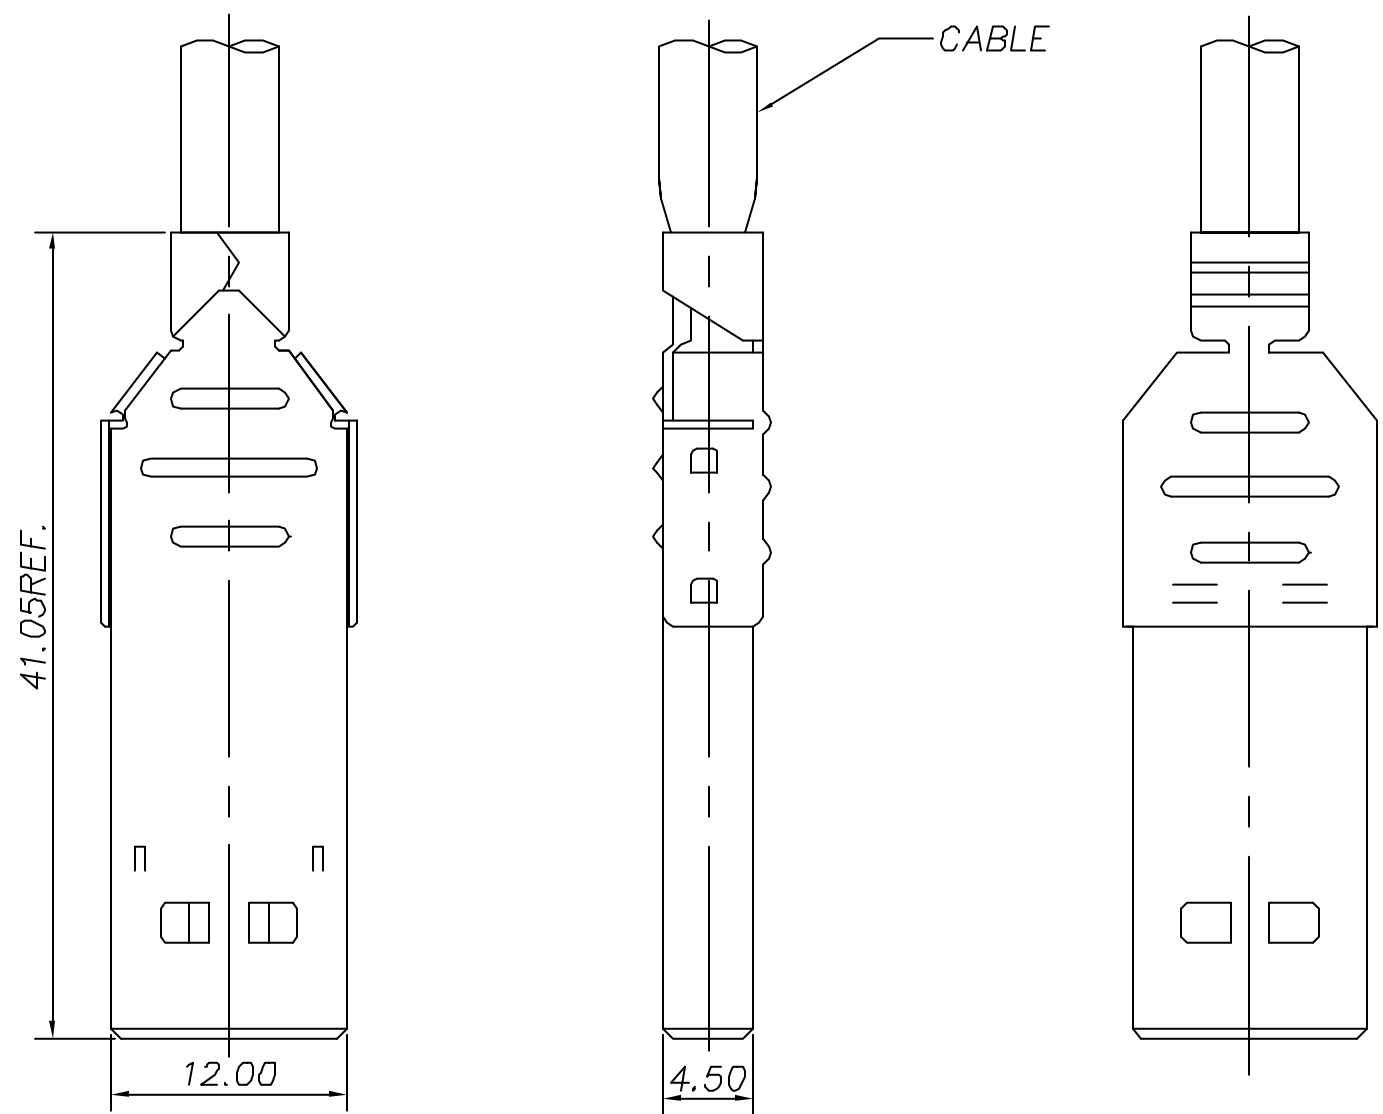






- NOTES:
- 1.0. MATERIAL:
    - 1.1. HOUSING: PBT G.F. UL 94V-0
    - 1.2. CONTACT: COPPER ALLOY
    - 1.3. SHELL: STEEL
  - 2.0. RATING:
    - 2.1. VOLTAGE: 30VAC(R.M.S.)
    - 2.2. CURRENT: 1.0 AMPERE MIN.
    - 2.3. TEMPERATURE: -55°C TO +105°C
  - 3.0. ELECTRIC CHARACTERISTIC:
    - 3.1. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
    - 3.2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
    - 3.3. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC

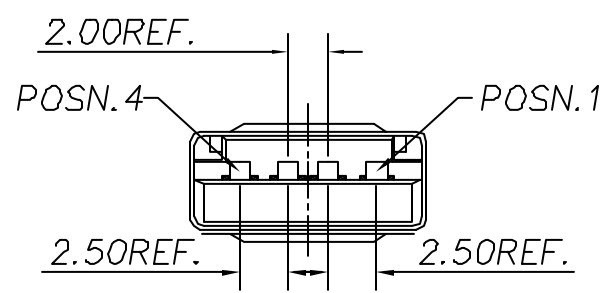

General Tolerance		Angle Tolerance		Dwg	Date	<b>COMOSS®</b> COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C.	
.X	±0.15	.X°	±1.0°	Bing	08/23/02'		
.XX	±0.10	.XX°	±0.5°	Design	Date		
.XXX	±0.05	.XXX°	±0.2°	Bing	09/04/02'	Item	
SHEET 1/2		CHK		Date		USB CONNECTOR	
FINISH SEE ORDER INFORMATION		William		09/04/02'		USB A/Male LONG SHELL CABLE END SOLDERING TYPE	
Scale	N/A	Unit:	mm	APPR	Date	Dwg. No.	SIZE
						A0296	A3
						Part No. USB-4MAHSXXXX	REV 1.0

# CUSTOMER COPY

## ASSEMBLY PROCESS:

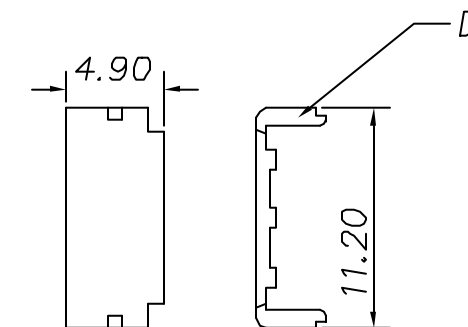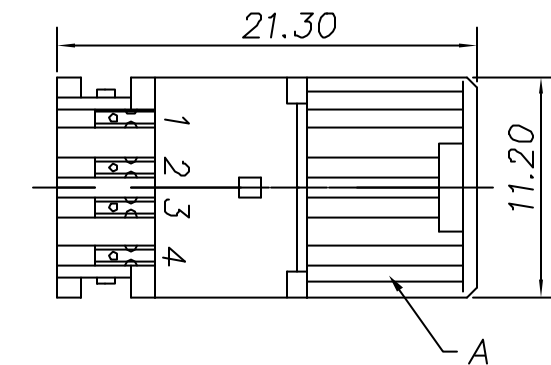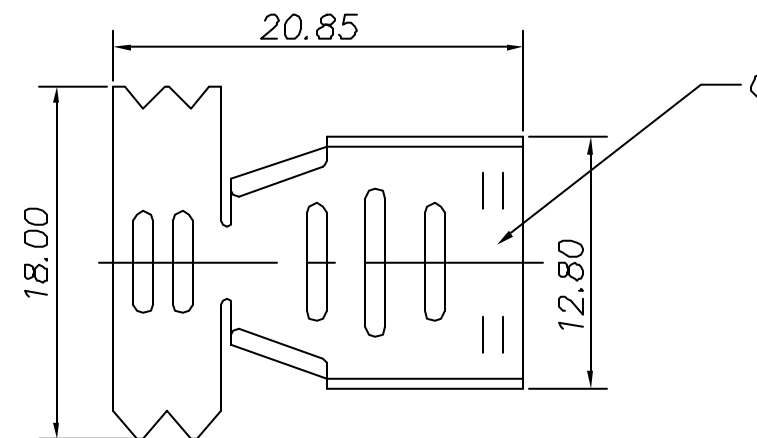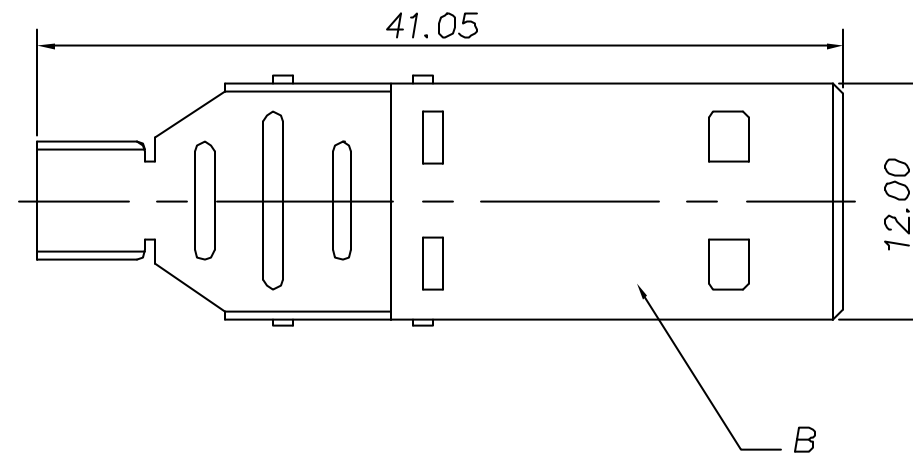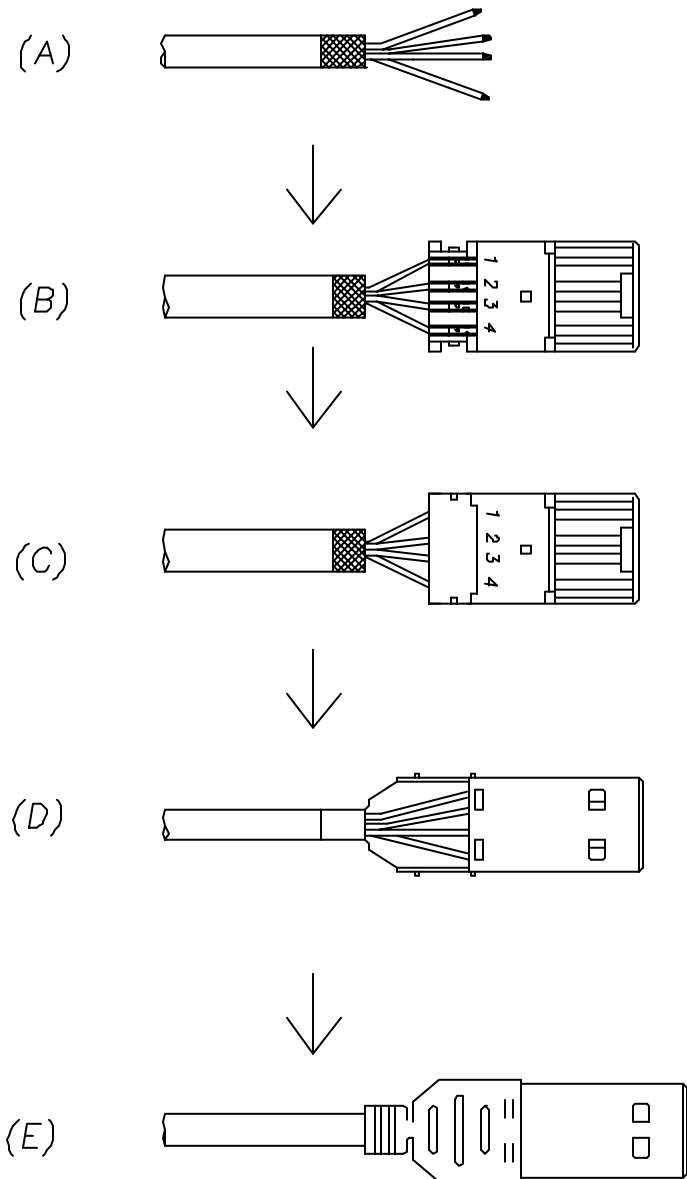

D	COVER	THERMOPLASTC	USB-4MAHSXXXX
C	BACK SHELL	STELL	
B	FRONT SHELL	STEEL	
A	HOUSING	THERMOPLASTIC	
ITEM	DESCRIPTION	MATERIAL	P/N

General Tolerance		Angle Tolerance		Dwg	Date	<b>COMOSS®</b> COMOSS ELECTRONIC CO., LTD. 4F., No. 11, Chung-Hsin St., ShuLin 238, Taipei, Taiwan R.O.C. Item USB CONNECTOR USB A/Male LONG SHELL CABLE END SOLDERING TYPE	
.X	±0.15	.X°	±1.0°	Bing	08/23/02'		
.XX	±0.10	.XX°	±0.5°	Design	Date		
.XXX	±0.05	.XXX°	±0.2°	Bing	09/04/02'		
SHEET 2/2				CHK	Date	Dwg. No. A0296 Part No. USB-4MAHSXXXX	
FINISH SEE ORDER INFORMATION				William	09/04/02'		
Scale N/A		Unit: mm		APPR	Date	SIZE A3 REV 1.0	
		