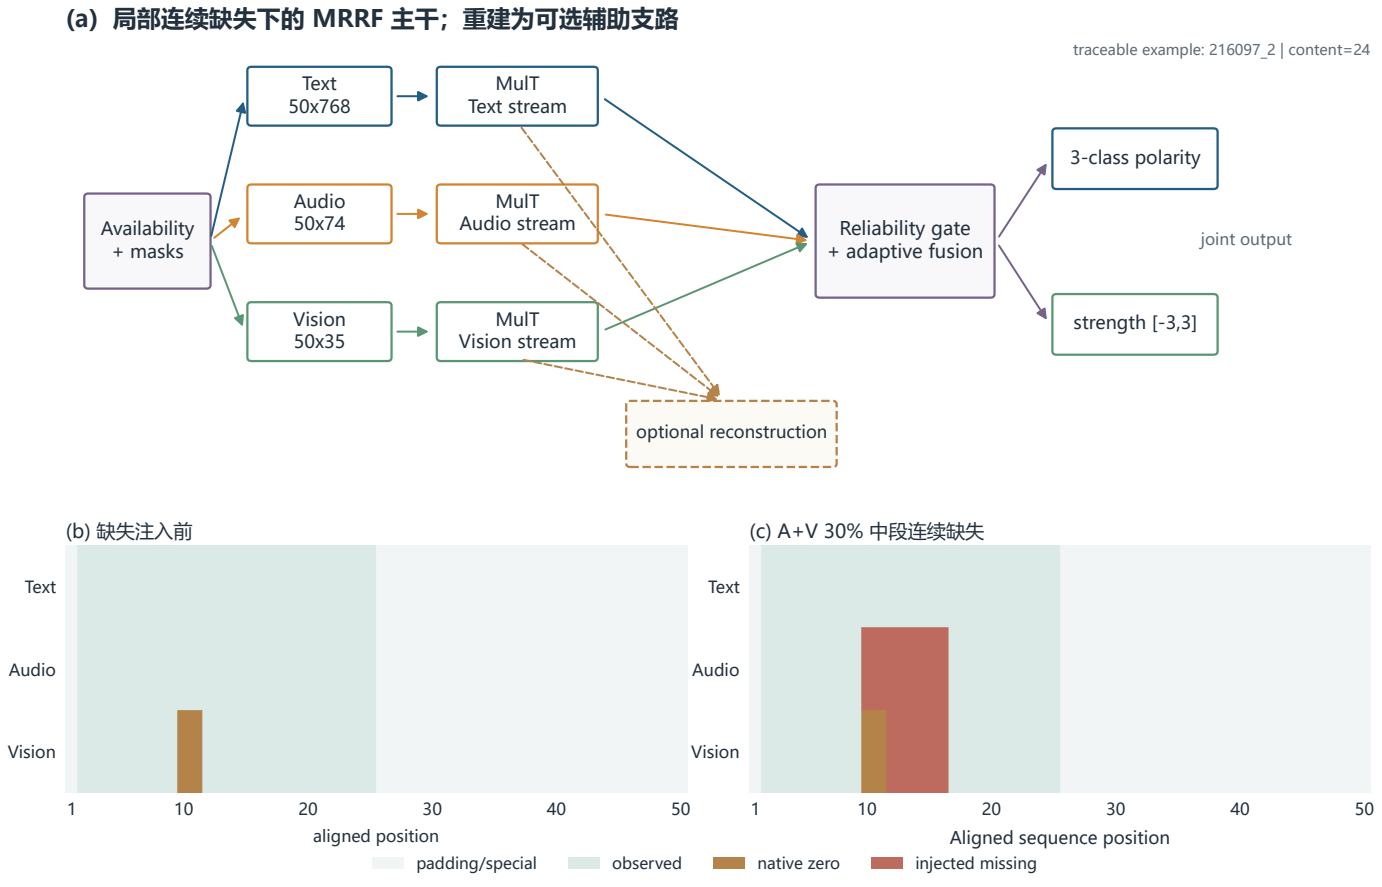
(a) 局部连续缺失下的 MRRF 主干；重建为可选辅助支路
traceable example: 216097_2 | content=24
Text
50x768
MulT
Text stream
Audio
50x74
MulT
Audio stream
Availability
+ masks
Vision
50x35
MulT
Vision stream
Reliability gate
+ adaptive fusion
3-class polarity
joint output
strength [-3,3]
optional reconstruction
(b) 缺失注入前
Text
Audio
Vision
1
10
20
30
40
50
aligned position
(c) A+V 30% 中段连续缺失
Text
Audio
Vision
1
10
20
30
40
50
Aligned sequence position
padding/special
observed
native zero
injected missing