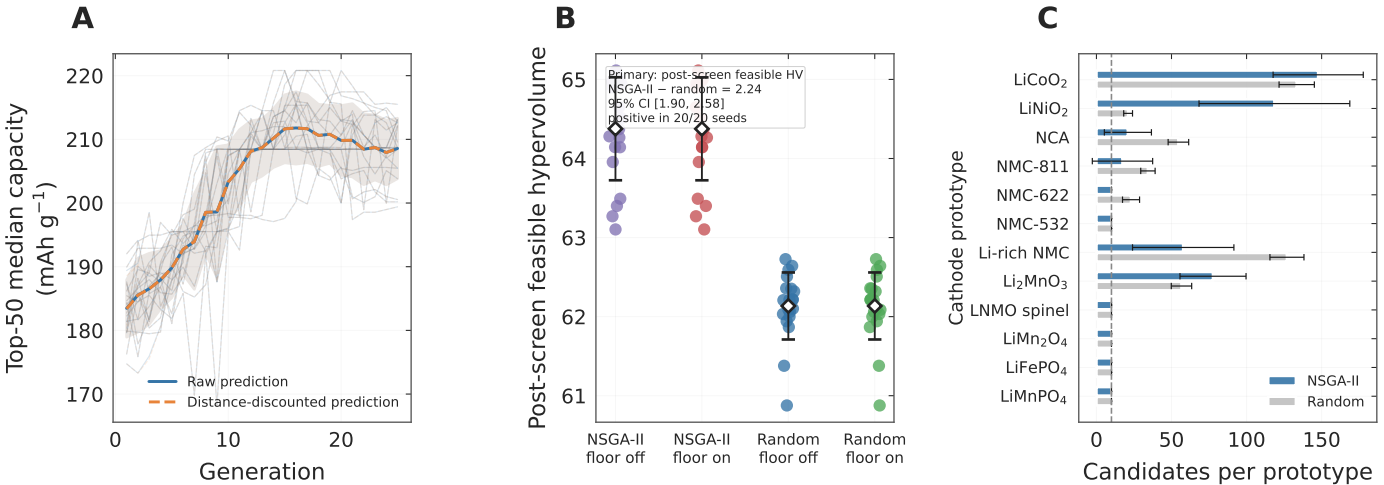
A
Top-50 median capacity (mAh g^{-1})
220
210
200
190
180
170
0
10
20
Generation
Raw prediction
Distance-discounted prediction
B
Post-screen feasible hypervolume
65
64
63
62
61
Primary: post-screen feasible HV
NSGA-II − random = 2.24
95% CI [1.90, 2.58]
positive in 20/20 seeds
NSGA-II floor off
NSGA-II floor on
Random floor off
Random floor on
C
Cathode prototype
LiCoO$_2$
LiNiO$_2$
NCA
NMC-811
NMC-622
NMC-532
Li-rich NMC
Li$_2$MnO$_3$
LNMO spinel
LiMn$_2$O$_4$
LiFePO$_4$
LiMnPO$_4$
NSGA-II
Random
0
50
100
150
Candidates per prototype