

RIGMA

INFINITY D8 Plus

500 kg to 2000 kg



Extra Safe



Premium Tech



Real-time Monitored



Protected

RIGMA

ELECTRIC CHAIN MOTOR

CAPACITIES

500 kg to 2000 kg

LIFT

10-80 metre

SPEEDS

4 metre/minute
(8 metre/minute available)

VOLTAGES

3-phase

RIGMA PRO D8 Plus is TÜV certified to BGV-D8 Plus standards and bears CE marking.

IP 66 RATING

An Ingress Protection (IP) Rating of 66 indicates that the Rigma PRO offers protection from dust and high-pressure water - making this unit ideal for use in outdoor environments.

SAFETY FACTOR

10:1 ultra-high safety factor delivers ample safety margin against wear, shock and fatigue, fully certified for overhead suspension above audiences.

HIGH or LOW VOLTAGE CONTROL OPTIONAL

High voltage: 380-415V-3ph-50/60Hz;
220-230V-3ph-50/60Hz

Low voltage: 24 & 48 Volt optional

Single voltage or switchable dual voltage optional.

DURABLE & INVISIBLE HOUSING

Completely enclosed cast aluminum housing.
Matte black powder coated finish with fingerprint-resistant surface for low visibility.
Other colors on request.

DUTY CYCLE

M5 rated for normal stage use.

ELECTRICAL

Finger safe wiring meets all electrical codes.

LOAD CHAIN

V100 chain, low temperature resistant and high ductility.

Optional TÜV CE certificated DAT chain available.

EXTENDED CHAIN BAG

Extended chain bag which made from textile material enables long-stroke lifting, reduces operating noise and prevents chain jamming for higher safety.

STANDARD & CLIMBING DUAL-USE

High versatility, low costs, fits all stage setups.

ADJUSTABLE HANDLE

Flipable handle suitable for both standard and climbing mounting; ergonomic structure enables effortless lifting.



HEAVY DUTY DC BRAKER

Real dual independent acting heavy duty DC electromagnetic disc brakes offer full safety redundancy.

ADJUSTABLE CLUTCH

Clutch outside of gear train meets International standards and is fully adjustable. Designed to prevent damage to the hoist by preventing excessive overloads.

HIGH-PRECISION ROTARY ENCODER

REAL-TIME LOAD MONITOR

Prevents overload & sudden load loss.

DUAL SOFT LIMITS

Easy set-up, pre-stop protection before mechanical limit activation.

ONE-TOUCH ALIGNMENT

Delivers fast, precise horizontal leveling to cut setup time, minimize human error and ensure even load distribution for long-term stable operation.

PRECISION HELICAL GEARING

Designed for long life, and smoother operation.

PERFECT CHAIN-SHEAVE FIT

Matched hardness & precise structural fit between chain and sheave for minimal wear and stable vertical lifting.

MULTIPLE LIMIT IMPLEMENTATION TYPES AVAILABLE

2-4 CAM LIMIT SWITCHES


Precise adjustment, strong anti-interference, long service life

2 CONTACT LIMIT SWITCH

Simple structure, fast response, easy maintenance

EXTERNAL CHAIN GUIDE

- Polyamide construction: self-lubricating, wear & corrosion resistant, protects chain and cuts noise.
- External design for fast disassembly, easy inspection and better heat dissipation.
- Double-layer anti-jam structure restrains chain, avoids slip, tilt and jam under unbalanced loads.

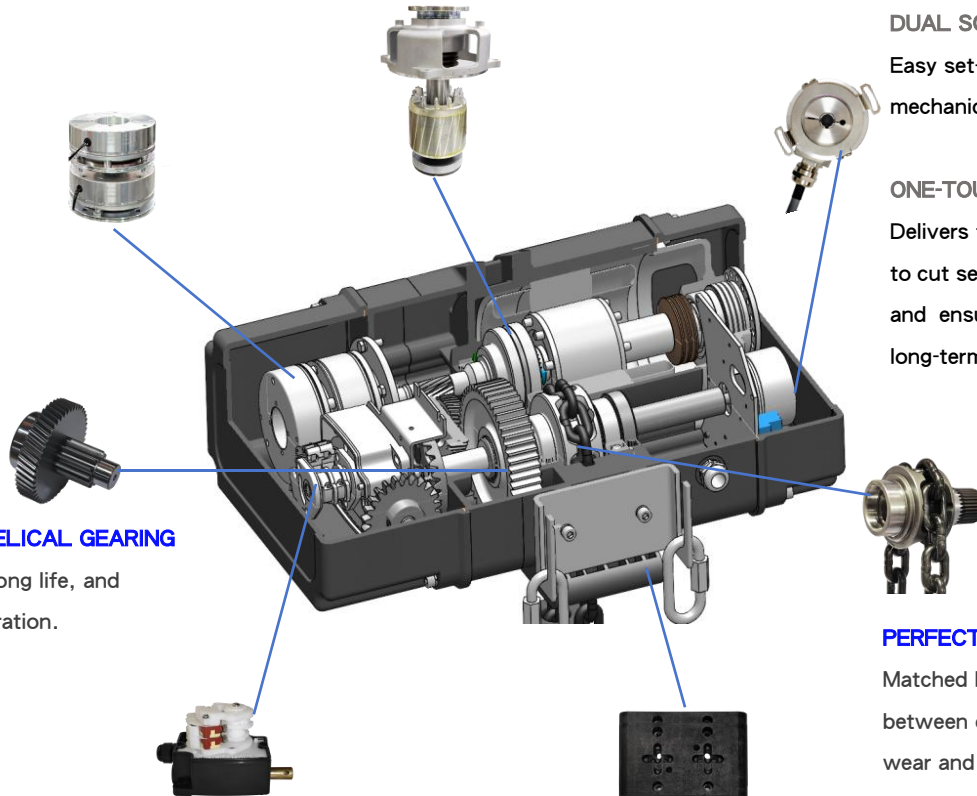

Capacity	500kg	1000kg
Safety Factor	10/1 (static)	10/1 (static)
Protection Class	IP66	IP66
Lifting Speed	4m/min (8m/min optional)	4m/min (8m/min optional)
Clutch	YES Outside the load-bearing path	YES Outside the load-bearing path
Brakes	2 independent DC brakes	2 independent DC brakes
Limit Switches	2 soft limit switches 2 contact limit switches or 2-4 point cam limit switches optional	2 soft limit switches 2 contact limit switches or 2-4 point cam limit switches optional
High-Precision Rotary Encoder	YES	YES
Load Monitor	YES	YES
Overload/Underload Protector	YES	YES
One-touch Alignment	YES	YES
Size	L:437mm W:258mm H:133mm	L:506mm W:300mm H:150mm
Weight	Only 28kg (body)	Only 48kg (body)
Chain Type	G100 T/V (TÜV CE certificated DAT chain optional)	G100 T/V (TÜV CE certificated DAT chain optional)
Chain Size	7.1*21mm	8*24mm