

RIGMA

PRO D8

500 kg to 2000 kg



Safe



Compact



Light



Protected

RIGMA

ELECTRIC CHAIN MOTOR

CAPACITIES

500 kg to 2000 kg

LIFT

10-80 metre

SPEEDS

4 metre/minute

VOLTAGES

3-phase

RIGMA PRO D8 complies with BGV-D8 and CE.

IP 66 RATING

An Ingress Protection (IP) Rating of 66 indicates that the Rigma PRO offers protection from dust and high-pressure water - making this unit ideal for use in outdoor environments.

ADJUSTABLE CLUTCH

Clutch outside of gear train meets International standards and is fully adjustable. Designed to prevent damage to the hoist by preventing excessive overloads.

PRECISION HELICAL GEARING

Designed for long life, and smoother operation.

HEAVY DUTY DC BRAKE

Designed for a long service life, the brake location allows for quick access & easy inspection.

HIGH or LOW VOLTAGE CONTROL OPTIONAL

High voltage: 380-415V-3ph-50/60Hz;

220-230V-3ph-50/60Hz

Low voltage: 24 & 48 Volt optional

Single voltage or switchable dual voltage optional.

DURABLE & LIGHTWEIGHT HOUSING

Completely enclosed cast aluminum housing.

Matte black powder coated finish with

fingerprint-resistant surface for low visibility.

Other colors on request.

LOAD CHAIN

V100 chain, low temperature resistant and high ductility provides a factor of safety of 8:1.

Optional DAT chain available.

DUTY CYCLE

M3 rated for normal stage use. Optional M5 Available.

ELECTRICAL

Finger safe wiring meets all electrical codes.

ADJUSTABLE LIMIT SWITCH

Adjustable limit switch that will automatically stop the hook at any predetermined point when either lifting or lowering, preventing overtravel. Optional 2 to 6 limit switch available.

EXTERNAL CHAIN GUIDE

- Polyamide construction: self-lubricating, tough, wear & corrosion resistant, protects chain and cuts noise.
- External design for fast disassembly, easy inspection and better heat dissipation.
- Double-layer anti-jam structure restrains chain, avoids slip, tilt and jam under unbalanced loads.

STANDARD & CLIMBING DUAL-USE

High versatility, low costs, fits all stage setups.

ADJUSTABLE HANDLE

Flipable handle suitable for both standard and climbing mounting; ergonomic structure enables effortless lifting.



EXTERNAL CHAIN GUIDE

Polyamide construction: self-lubricating, wear & corrosion resistant, protects chain and cuts noise.

External design for fast disassembly, easy inspection and better heat dissipation.

Double-layer anti-jam structure restrains chain, avoids slip, tilt and jam under unbalanced loads.

PRECISION HELICAL GEARING


Designed for long life, and smoother operation.

PERFECT CHAIN-SHEAVE FIT

Matched hardness & precise structural fit between chain and sheave for minimal wear and stable vertical lifting.

ADJUSTABLE CLUTCH

Clutch outside of gear train meets International standards and is fully adjustable. Designed to prevent damage to the hoist by preventing excessive overloads.

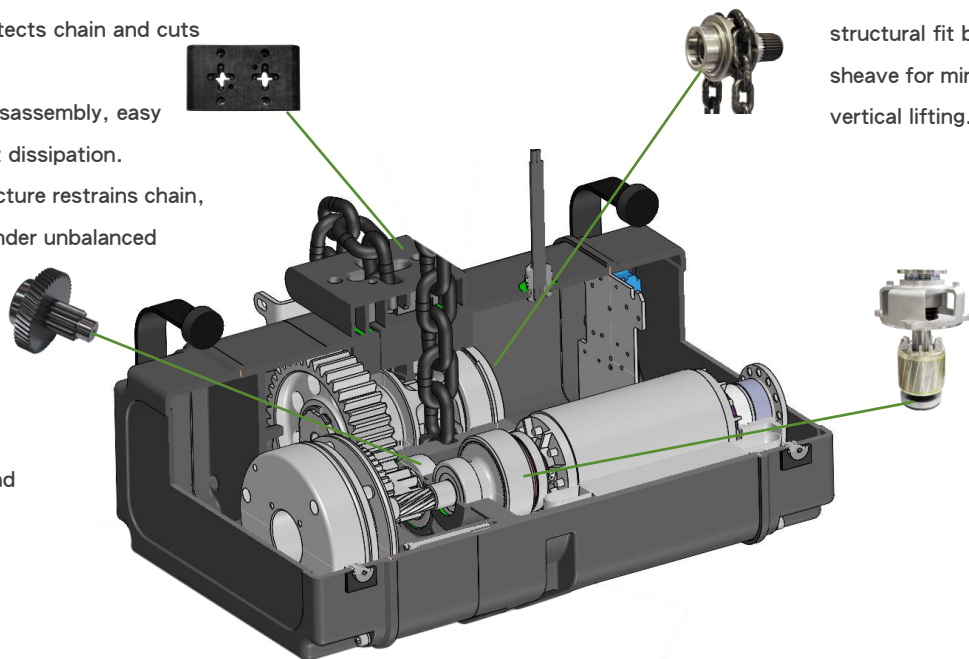

Capacity	500kg	1000kg	2000kg
Safety Factor	8/1	8/1	8/1
Protection Class	IP66	IP66	IP66
Lifting Speed	4m/min	4m/min	4m/min
Clutch	YES Outside the load-bearing path	YES Outside the load-bearing path	YES Outside the load-bearing path
Brakes	1 DC brake	1 DC brake	1 DC brake
Limit Switches	2-contact limit switches	2-contact limit switches (4-point cam limit switches optional)	2-contact limit switches (4-point cam limit switches optional)
Size	L:371mm W:197mm H:100mm	L:437mm W:258mm H:133mm	L:451mm W:300mm H:150mm
Weight	Only 15kg (body)	Only 28kg (body)	Only 48kg (body)
Chain Type	G100 T/V	G100 T/V	G100 T/V
Chain Size	5*15mm	7.1*21mm	10*30mm