

RIGMA

PRODUCT DATA SHEET

PRO 2000 kg D8 PLUS CHAIN HOIST



Certified by TÜV Rheinland

D8Plus Standards	CE Standards
SQP2-2018 EN17206:2020/AC EN14492-2-2019 EN60204-32-2008 EN ISO12100:2010 EN17206:2020	EN ISO 12100:2010 EN 14492-2:2006+A1 EN 14492-2+A1/AC:2010 EN 60204-32:2008

1. Technical Data

Features

- high-pressure die-cast housing delivers IP66 high protection rating
- light and compact design with low-noise running
- extended design chain bag made from textile material
- real 2 independent spring loaded brakes with DC magnet coil assemblies realize dual-layer safety assurance
- friction clutch outside the load-bearing path for enhanced durability and safety
- limit switches for upper and lower end (external limit switches including additional chain block stop)
- precision helical gearing designed for long life, and smoother operation
- external double-layer anti-jam chain guide made of polyamide, greatly reducing chain abrasion
- precise chain guide with 4-pocket chain sprocket wheel, ensures uniform force distribution and smoother chain operation
- operating coefficient load chain-8 (static)
- dual 1-fall 360 degree turnable and lockable hook
- convertible standard & climbing hoist with flippable handle suitable for both standard and climbing mounting; ergonomic structure enables effortless lifting
- 1m CEE-16/4 connection cable

Technical data

Model type:	RPD8+2000
Hoisting speed:	4 m/min
Safe working load:	2000 kg
Number of falls:	1
Load chain:	V100 10 x 30 mm
Minimum Breaking Force of chain:	157 kN
Suspension type:	1-fall 360 degree turnable lockable hook
Classification of mechanism lifting gear	M3
FEM/ ISO:	
Duty cycle - starts per hour:	ED 15 % - 120 c/h
Mode of operation:	S3 (according IEC 60034-1)
Noise level:	<65 dBA/ 1 m distance
Motor speed:	1380 rpm
Weight (without chain):	approx. 48 kg
Weight of the chain:	approx. 2.17 kg/m


Electrical data

Motor power:	1.5 kW
Power factor cos ϕ :	0.69
Nominal voltage:	3~400 V 3~230 V
Frequency:	50 or 60 Hz
Rated/ full-load current:	2.3 A/ 2.5 A
Safety class:	I
Safety factor:	8
Degree of protection:	IP 66
Control equipment:	2 direct control

Options/ accessories

- 2 - 4 cam limit switches
- load monitor
- overload/under-load protector
- one-touch alignment
- AC or DC contactor control
- 4 or 8-channel controller
- control panel for single hoists
- roller or electrical trolley

2.Dimension Sheet

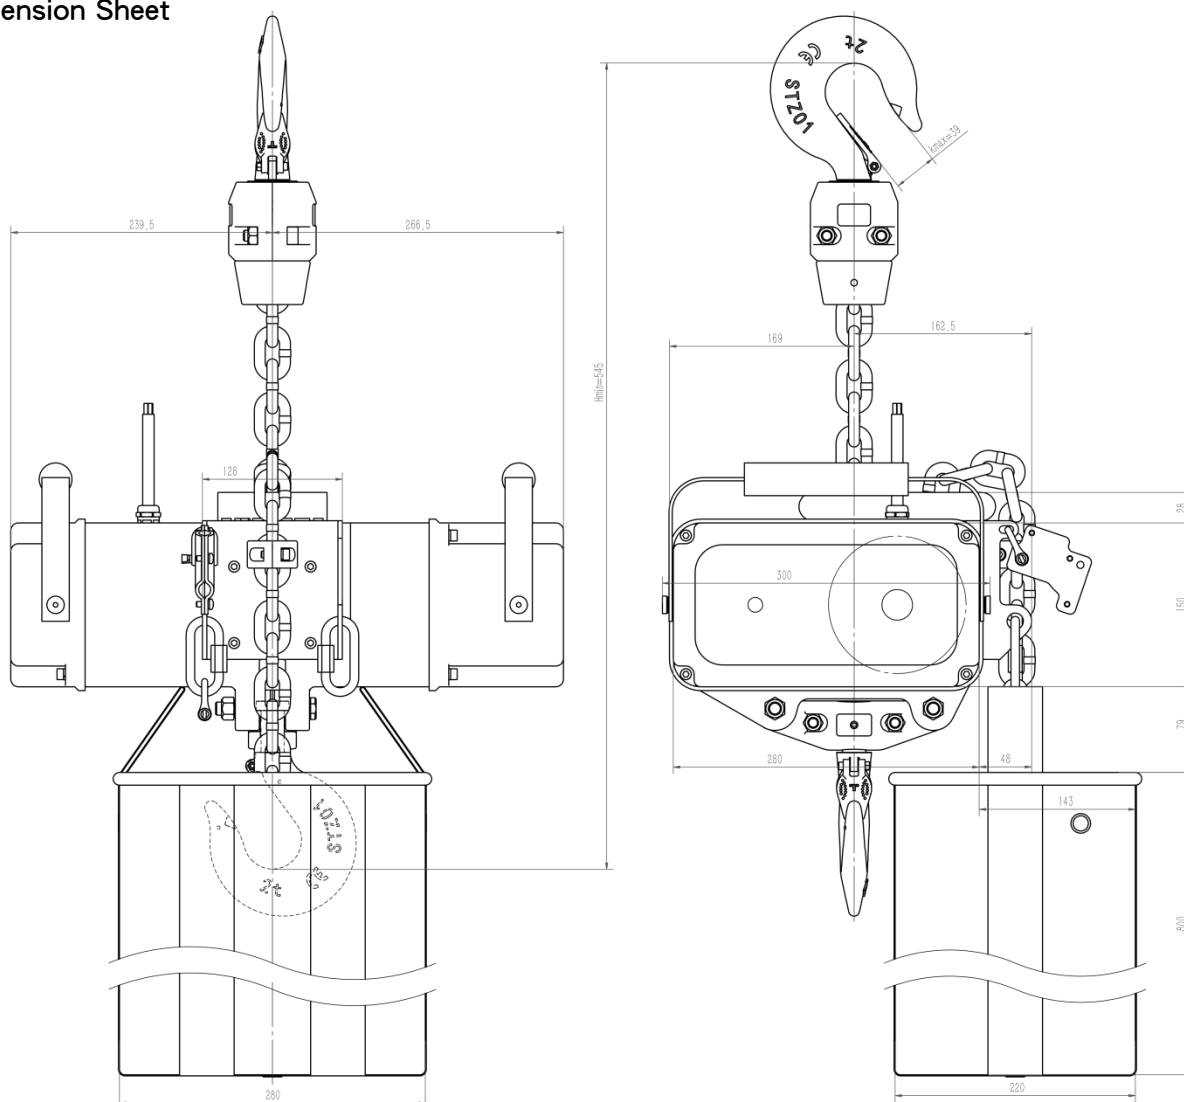

© 2026 RIGMA All Rights Reserved

Operation Manual for Stage Chain Hoist

Version V1.0 | Release: 2026-07

Manufacturer: Ammo Tech (Beijing) Technology Co., Ltd.

Made in China

Disclaimer: Specs may change without notice. Improper use voids warranty and all liability.