

# RIGMA

## PRO D8 Plus

250 kg to 2000 kg



Safe



Compact



Light



Protected

# RIGMA

## ELECTRIC CHAIN MOTOR

### CAPACITIES

250 kg to 2000 kg

### LIFT

10-80 metre

### SPEEDS

4 metre/minute

### VOLTAGES

3-phase

RIGMA PRO D8 Plus complies with BGV-D8 and CE.

### IP 66 RATING

An Ingress Protection (IP) Rating of 66 indicates that the Rigma PRO offers protection from dust and high-pressure water - making this unit ideal for use in outdoor environments.

### HIGH or LOW VOLTAGE CONTROL OPTIONAL

High voltage: 380-415V-3ph-50/60Hz;

220-230V-3ph-50/60Hz

Low voltage: 24 & 48 Volt optional

Single voltage or switchable dual voltage optional.

### DURABLE & LIGHTWEIGHT HOUSING

Completely enclosed cast aluminum housing. Matte black powder coated finish with fingerprint-resistant surface for low visibility. Other colors on request.

### DUTY CYCLE

M3 rated for normal stage use. Optional M5 Available.

### ADJUSTABLE LIMIT SWITCH

Adjustable limit switch that will automatically stop the hook at any predetermined point when either lifting or lowering, preventing overtravel. Optional 2 to 6 limit switch available.

### ELECTRICAL

Finger safe wiring meets all electrical codes.

### LOAD CHAIN

V100 chain, low temperature resistant and high ductility provides a factor of safety of 8:1.

Optional DAT chain available.

### EXTENDED CHAIN BAG

Extended chain bag which made from textile material enables long-stroke lifting, reduces operating noise and prevents chain jamming for higher safety.

### STANDARD & CLIMBING DUAL-USE

High versatility, low costs, fits all stage setups.

### ADJUSTABLE HANDLE

Flipable handle suitable for both standard and climbing mounting; ergonomic structure enables effortless lifting.



### EXTERNAL CHAIN GUIDE

Polyamide construction: self-lubricating, wear & corrosion resistant, protects chain and cuts noise.

External design for fast disassembly, easy inspection and better heat dissipation.


Double-layer anti-jam structure restrains chain, avoids slip, tilt and jam under unbalanced loads.

### PRECISION HELICAL GEARING

Designed for long life, and smoother operation.

### HEAVY DUTY DC BRAKER

Real dual independent acting heavy duty DC electromagnetic disc brakes offer full safety redundancy.

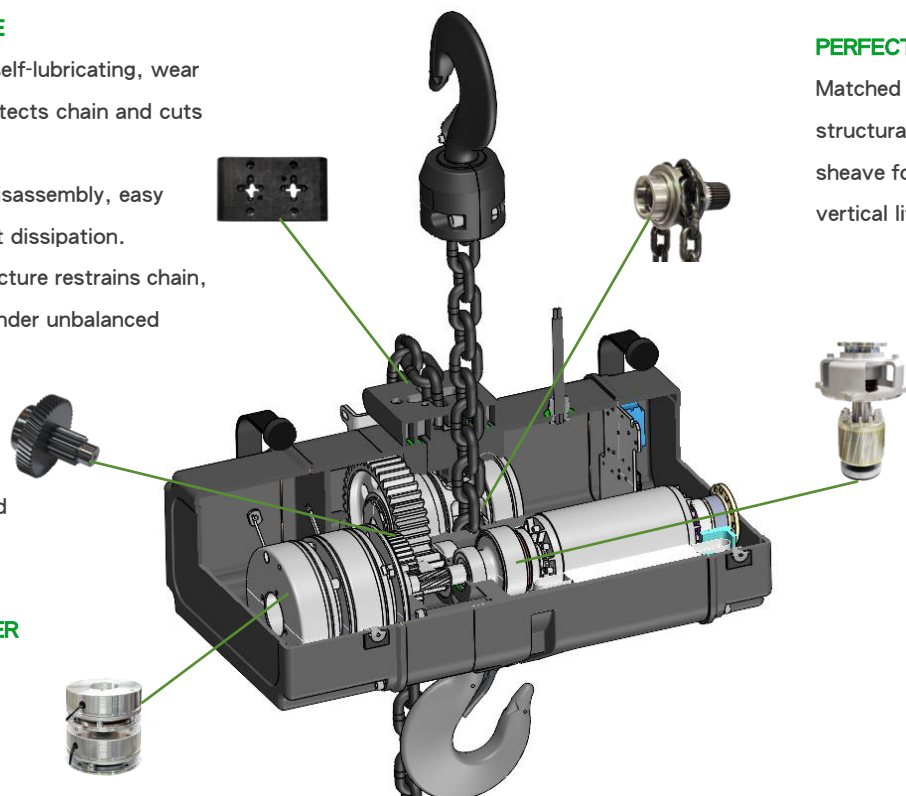

### PERFECT CHAIN-SHEAVE FIT

Matched hardness & precise structural fit between chain and sheave for minimal wear and stable vertical lifting.

### ADJUSTABLE CLUTCH

Clutch outside of gear train meets International standards and is fully adjustable. Designed to prevent damage to the hoist by preventing excessive overloads.

| Capacity         | 250kg                                | 500kg                                | 1000kg                                                            | 2000kg                                                            |
|------------------|--------------------------------------|--------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| Safety Factor    | 10/1 (static)                        | 8/1 (static)                         | 8/1 (static)                                                      | 8/1 (static)                                                      |
| Protection Class | IP66                                 | IP66                                 | IP66                                                              | IP66                                                              |
| Lifting Speed    | 4m/min                               | 4m/min                               | 4m/min                                                            | 4m/min                                                            |
| Clutch           | YES<br>Outside the load-bearing path | YES<br>Outside the load-bearing path | YES<br>Outside the load-bearing path                              | YES<br>Outside the load-bearing path                              |
| Brakes           | 2 independent DC brakes              | 2 independent DC brakes              | 2 independent DC brakes                                           | 2 independent DC brakes                                           |
| Limit Switches   | 2-contact limit switches             | 2-contact limit switches             | 2-contact limit switches<br>(4-point cam limit switches optional) | 2-contact limit switches<br>(4-point cam limit switches optional) |
| Size             | L:371mm<br>W:197mm<br>H:100mm        | L:371mm<br>W:197mm<br>H:100mm        | L:437mm<br>W:258mm<br>H:133mm                                     | L:451mm<br>W:300mm<br>H:150mm                                     |
| Weight           | Only 14kg (body)                     | Only 15kg (body)                     | Only 28kg (body)                                                  | Only 48kg (body)                                                  |
| Chain Type       | G100<br>T/V                          | G100<br>T/V                          | G100<br>T/V                                                       | G100<br>T/V                                                       |
| Chain Size       | 5*15mm                               | 5*15mm                               | 7.1*21mm                                                          | 10*30mm                                                           |