

RIGMA

LITE

1000 kg



Light



Compact



Safe

RIGMA

ELECTRIC CHAIN MOTOR

CAPACITIES

1000 kg

LIFT

10-80 metre

SPEEDS

4 metre/minute

VOLTAGES

3-phase

RIGMA LITE CHAIN HOIST HIGH COST-EFFECTIVE CHOICE.

IP66 RATING

An Ingress Protection (IP) Rating of 66 indicates that the Rigma Lite offers protection from dust and high-pressure water - making this unit ideal for use in outdoor environments.

PRECISION HELICAL GEARING

Designed for long life, and smoother operation.

HEAVY DUTY DC BRAKE

Designed for a long service life, the brake location allows for quick access & easy inspection.

HIGH or LOW VOLTAGE CONTROL OPTIONAL

High voltage:

220/415V-3ph-50/60Hz;

Low voltage: 24 & 48 Volt
optional

DURABLE HOUSING

Completely enclosed cast aluminum housing.

LOAD CHAIN

V80 chain, low temperature resistant and high ductility provides a factor of safety of 5:1.

DUTY CYCLE

M3 rated for normal stage use.

ELECTRICAL

Finger safe wiring meets all electrical codes.

EXTERNAL CHAIN GUIDE


- Polyamide construction: self-lubricating, tough, wear & corrosion resistant, protects chain and cuts noise.
- External design for fast disassembly, easy inspection and better heat dissipation.
- Double-layer anti-jam structure restrains chain, avoids slip, tilt and jam under unbalanced loads.

STANDARD & CLIMBING DUAL-USE

High versatility, low costs, fits all stage setups.



Dimension Sheet

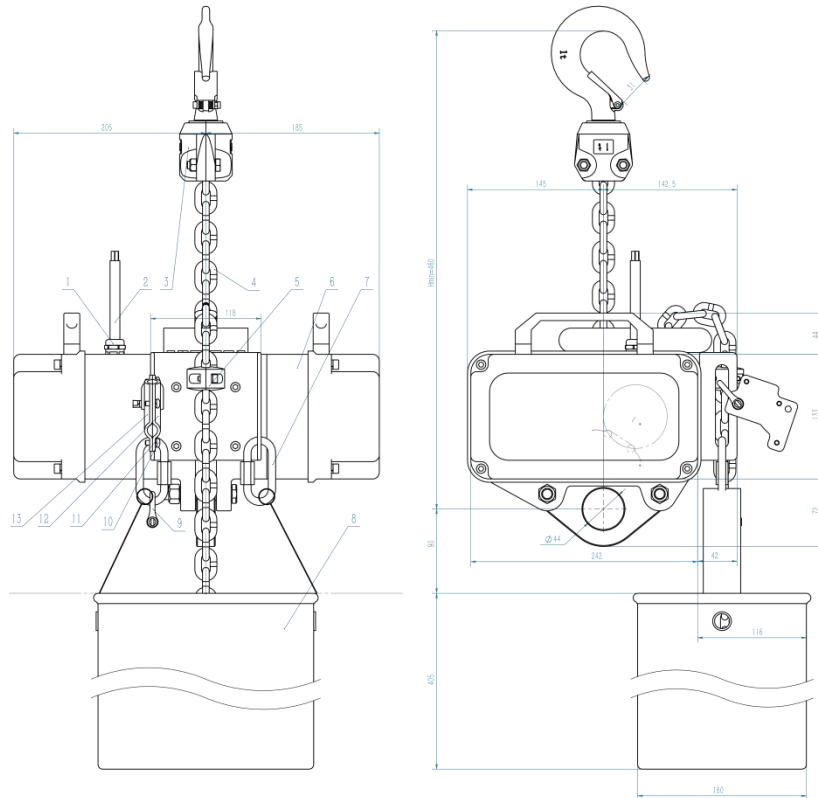

Capacity	1000kg	1000kg
Safety Factor	5/1	5/1
Protection Class	IP66	IP66
Lifting Speed	4m/min	4m/min
Clutch	NO	NO
Brakes	1 DC brake	2 DC brake
Limit Switches	NO (2-contact limit switches optional)	NO (2-contact limit switches optional)
Size	L:390mm W:242mm H:133mm	L:435mm W:242mm H:133mm
Weight	Only 26kg (body)	Only 27kg (body)
Chain Type	G80 T/V	G80 T/V
Chain Size	7.1*21mm	7.1*21mm