

RIGMA

PRODUCT DATA SHEET

LITE 1000 kg CHAIN HOIST

PRODUCT MODEL RL1000



1000 kg SAFE WORKING LOAD	4 m/min LIFTING SPEED	IP66 PROTECTION	M3 CLASSIFICATION
---	---	---------------------------------------	---

| 3-PHASE | SINGLE / DUAL BRAKE CONFIGURATIONS

1. TECHNICAL DATA

PRODUCT FEATURES

- Compact purpose-built stage design reduces occupied space, handling effort and transport load.
- Embedded motor design; motor speed is checked before delivery to reduce synchronisation variation.
- Double-layer chain guard improves chain entry and exit stability and helps prevent jamming.
- IP66 high-pressure die-cast housing provides dust and water protection for demanding environments.
- Precision helical gearing, external polyamide chain guide and standard/climbing dual-use construction.
- Single-brake standard configuration with dual-brake and dual contact limits suspension option.

MECHANICAL DATA


PRODUCT MODEL	RL1000
HOIST TYPE	Chain Hoist
SAFE WORKING LOAD	1000 kg
LIFTING SPEED	4 m/min
NUMBER OF FALLS	1
CLASSIFICATION	M3
DUTY CYCLE	25%
D8 SAFETY FACTOR	5:1 standard; 6.4 calculated
LOAD CHAIN	G80, 7.1 x 21 mm, T heat treatment
CHAIN BREAKING FORCE	63.3 kN minimum
CHAIN WEIGHT	1.07 kg/m
BODY WEIGHT	26 kg single brake; 27 kg dual brake

MOTOR AND ELECTRICAL DATA


MOTOR POWER	0.75 kW
MOTOR MODEL	YHDE120-80-4
MOTOR TYPE	3-phase asynchronous motor
MOTOR SPEED	1380 rpm
RATED / FULL-LOAD CURRENT	2.3 A / 2.5 A
BRAKE TORQUE	12 N.m
BRAKE SAFETY FACTOR	2.31
STANDARD SUPPLY	3~380 V, 50 Hz
ELECTRICAL RANGE	Delta 230 V / star 400 V, 50/60 Hz
LOW-VOLTAGE CONTROL	AC 24 V / 48 V optional
BRAKE VOLTAGE	DC 108 V
CONNECTION	CEE 16 A, 4-pole
PROTECTION / NOISE	IP66 / 65 dB

Standards reference from configuration sheet: SQP2-2024, EN 17206:2020, EN 14492:2019.

2. CONFIGURATIONS AND DIMENSIONS

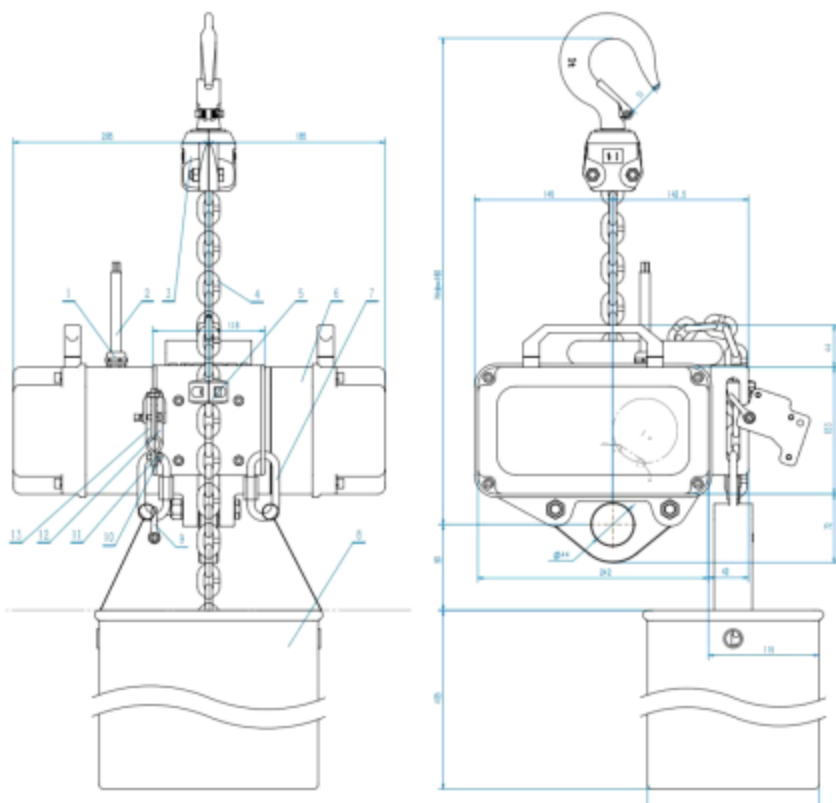

SINGLE-BRAKE CONFIGURATION

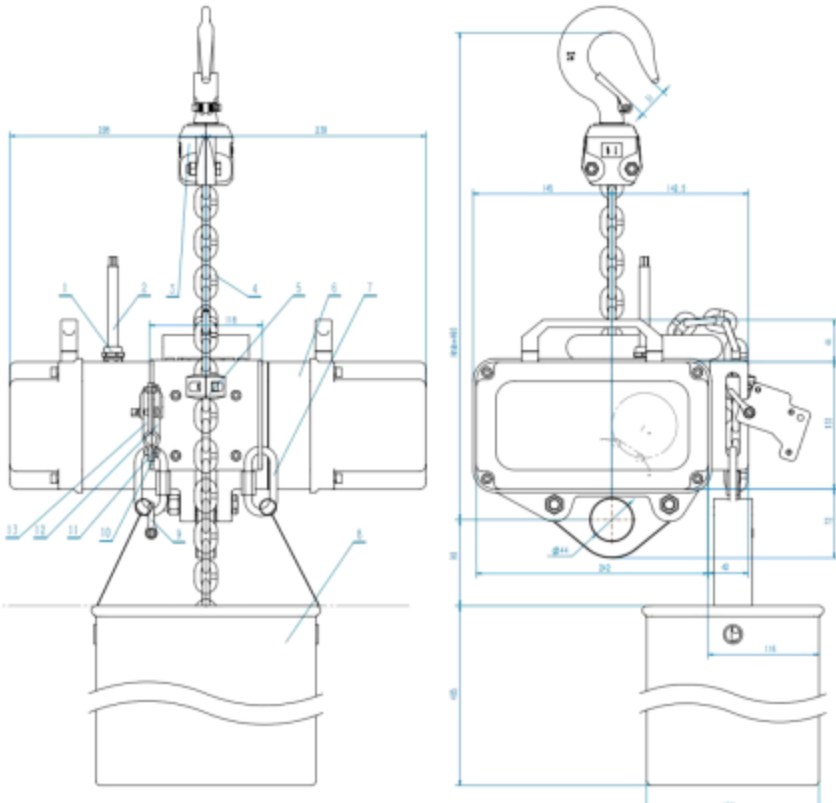

DUAL-BRAKE CONFIGURATION

CONFIGURATION	BRAKES	BODY SIZE (L x W x H)	BODY WEIGHT
Single brake	1 DC brake	390 x 242 x 133 mm	26 kg
Dual brake	2 DC brakes	435 x 242 x 133 mm	27 kg

OPTIONAL CONFIGURATION

- Upper and lower contact limit switches
- Single- or dual-brake configuration
- Suspension eye or 360-degree rotating hook
- AC 24 V / 48 V low-voltage control

CHAIN BAG DIMENSIONS

CHAIN LENGTH	A	B	C
30 m	450 mm	210 mm	190 mm
40 m	600 mm	210 mm	190 mm

Electrical diagram reference: standard 3-phase 380 V / 50 Hz supply; brake voltage DC 108 V.
 Specifications may change without notice. Confirm the final configuration with RIGMA before ordering.