


Oil Immersed Distribution Transformer

English Product Datasheet | Preliminary Project Reference

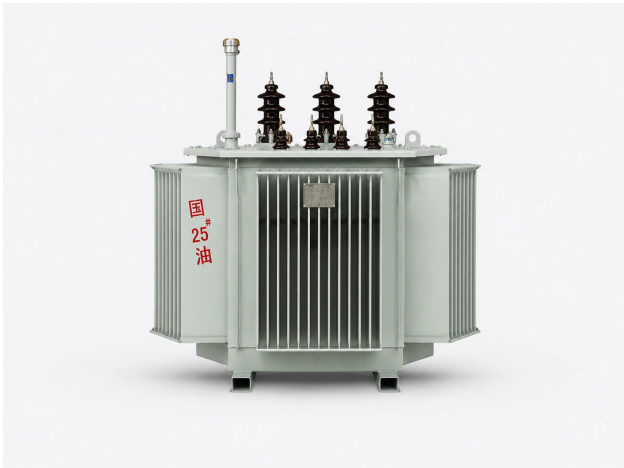

Document	WZE-DS-OIDT-EN-R2
Revision	R2 30 September 2026
Language	English
Status	Preliminary project reference data

Product Overview

Wenze oil-immersed distribution transformers provide medium-to-low-voltage conversion for utility networks, industrial facilities, commercial developments and rural electrification projects. The final rating, loss level, accessories and terminal arrangement are engineered against the approved project specification.

Typical Selection Range

Rated capacity	30-2500 kVA
Primary voltage	6-35 kV
Secondary voltage	0.4 / 0.415 kV or project-specific
Frequency	50 Hz / 60 Hz
Phase	Three-phase
Cooling	ONAN
Vector group	Dyn11 / Yyn0 or project-specific
Insulation medium	Transformer oil
Applicable standard	IEC 60076 or approved project standard
Standard altitude	Up to 1000 m; higher altitude by design review

Important: This document supports preliminary product selection. It does not replace the project-specific approved datasheet, drawings, technical agreement or routine test report.

Project Selection Reference

Typical configurations are shown for inquiry preparation. The destination utility specification, applicable local requirements and site conditions govern final selection.

Parameter	Typical Project Selection	Confirmation Basis
Common voltage ratios	10/0.4 kV, 11/0.415 kV, 20/0.4 kV, 22/0.415 kV and 33/0.415 kV	Final ratio follows the destination utility specification.
Frequency	50 Hz / 60 Hz according to the destination-country utility	Frequency and voltage ratio are confirmed against the local utility specification.
Tap changer	Off-circuit or project-specific arrangement	Range and step are stated in the approved project datasheet.
Winding conductor	Copper or aluminum	Subject to rating, guaranteed losses and approved design.
Service environment	Indoor or outdoor service; tropical/coastal conditions where specified	Declare humidity, salt exposure, solar load and maximum ambient temperature; confirm suitability for the project.
Testing	IEC 60076 routine tests	Type and special tests are available when included in the agreed scope.

Key Product Features

- Sealed or project-specific oil preservation arrangement
- Low-loss magnetic core and project-selected winding conductor
- Terminal, protection and monitoring accessories configured to order
- Export packing and document package coordinated by destination

Guaranteed Data Confirmed After Design Review

- No-load loss and load loss
- Short-circuit impedance and no-load current
- Temperature rise and insulation level
- Sound level, overall dimensions and total weight
- Accessories, terminal arrangement and general arrangement drawing

Typical Applications

- Utility distribution networks
- Industrial facilities and production plants
- Commercial and residential developments
- Rural electrification
- Renewable-energy auxiliary distribution

Information Required for Quotation

- Transformer or substation type
- Rated capacity and quantity
- Primary and secondary voltage
- Frequency, phase and vector group
- Destination country and utility specification
- Indoor/outdoor service, ambient temperature and altitude
- Required accessories, protection and metering
- Delivery schedule and applicable standard

Important: Final guaranteed performance, dimensions, weight, accessories and document scope are stated only in the approved project documents issued for the applicable order.