

K2 POWER M

3 KM

Product sheet

MADE IN
FRANCE

Power and compactness are the watchwords of the new K2 Power M line. Our engineers have packed the best Focal technologies, around our iconic K2 cone made with aramid fibre, renowned for its exceptional dynamics and high performance. Available “à la carte”, the K2 Power M products enable you to create the active audio system of your choice for a bespoke installation.



Key points

- Exclusive 'M'-profile K2 cone
- Compact speaker driver
- Exceptional power handling
- Active product
- Aluminium grille (optional)

| Type | Medium |
|------------------------|--|
| Medium | 3" (80mm) |
| Depth | 1 ¹ / ₈ " (27.3mm) |
| Cone | K2 Sandwich, M-shaped |
| Maximum power | 120W |
| Nominal power | 60W RMS |
| Sensitivity (2.83V/1m) | 89dB |
| Frequency response | 200Hz - 9kHz |
| Impedance | 4 Ω |
| Magnet | Neodymium |
| Voice-coil diameter | 1 ³ / ₈ " (35mm) |
| Suspension | TMD® |

K2 POWER M 3 KM

Technical Sheet


Medium



SPECIFICATIONS

| | |
|--------------------|--------------------|
| Nominal power | 60W |
| Maximum power | 120W |
| Sensitivity | 89dB |
| Nom. impedance | 4Ω |
| Frequency response | 200Hz-9KHz |
| Cone | Kevlar Sandwich, M |
| Surround | TMD® |
| VC diameter | 35mm 1 3/8" |
| Net weight | 200g |

FREQUENCY RESPONSE/IMPEDANCE

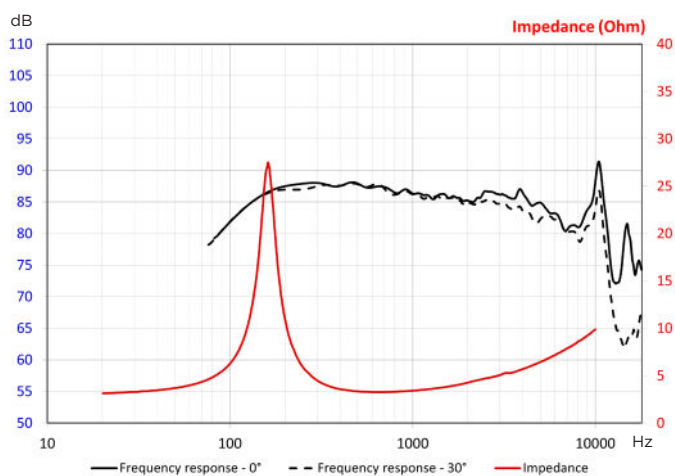

PARAMETERS

| | |
|-----|-------------------|
| Rdc | 3Ω |
| Fs | 170Hz |
| Mms | 3.4g |
| Cms | 0.4mm/N |
| Vas | 0.3l |
| Qts | 0.65 |
| Qes | 0.717 |
| Qms | 7 |
| Bxl | 4N/A |
| Sd | 30cm ² |

MECHANICAL DRAWING

